

EXHIBIT E

(12) **United States Patent**
Dojan et al.

(10) **Patent No.:** **US 7,401,420 B2**
(45) **Date of Patent:** ***Jul. 22, 2008**

(54) **ARTICLE OF FOOTWEAR HAVING A
FLUID-FILLED BLADDER WITH A
REINFORCING STRUCTURE**

(75) Inventors: **Frederick J. Dojan**, Vancouver, WA
(US); **Thomas Foxen**, Portland, OR
(US); **John F. Swigart**, Portland, OR
(US); **Eric Steven Schindler**, Portland,
OR (US)

1,181,441 A	5/1916	Franklin
1,240,153 A	9/1917	Olsen
1,304,915 A	5/1919	Spinney
1,323,610 A	12/1919	Price
1,514,468 A	11/1924	Schopf
1,584,034 A	5/1926	Klotz
1,625,582 A	4/1927	Anderson
1,625,810 A	4/1927	Krichbaum

(73) Assignee: **Nike, Inc.**, Beaverton, OR (US)

(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 108 days.

FOREIGN PATENT DOCUMENTS

AT	181938	2/1906
----	--------	--------

This patent is subject to a terminal dis-
claimer.

(Continued)

(21) Appl. No.: **11/434,301**

OTHER PUBLICATIONS

(22) Filed: **May 12, 2006**

Sport Research Review, NIKE, Inc., Jan./Feb. 1990.

(65) **Prior Publication Data**

(Continued)

US 2006/0201029 A1 Sep. 14, 2006

Primary Examiner—Ted Kavanaugh

Related U.S. Application Data

(74) *Attorney, Agent, or Firm*—Plumsea Law Group, LLC

(63) Continuation of application No. 10/767,211, filed on
Jan. 28, 2004, now Pat. No. 7,086,179.

(57) **ABSTRACT**

(60) Provisional application No. 60/531,674, filed on Dec.
23, 2003.

A sole component and a method of manufacturing the sole
component are disclosed. In general, the sole component
includes a fluid-filled bladder and a reinforcing structure
extending around the bladder. The reinforcing structure
is bonded to the exterior of the bladder, and may be recessed into
the bladder. In some embodiments, the reinforcing structure
extends along the side surfaces of the bladder and between
upper and lower surfaces of bladder. In manufacturing the
sole component, the reinforcing structure may be located
within a mold, and the polymer material forming the bladder
may be bonded to the reinforcing structure during the mold-
ing process.

(51) **Int. Cl.**
A43B 13/20 (2006.01)

(52) **U.S. Cl.** **36/29**

(58) **Field of Classification Search** **36/29,**
36/153, 154, 35 B


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

900,867 A	10/1908	Miller
1,069,001 A	7/1913	Guy

20 Claims, 32 Drawing Sheets

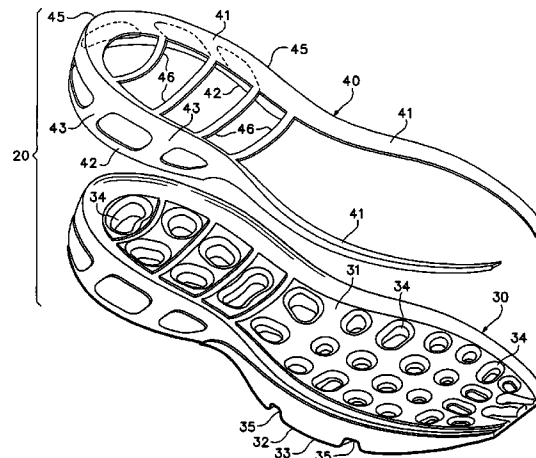

US 7,401,420 B2

Page 2

U.S. PATENT DOCUMENTS					
1,869,257 A	7/1932	Hitzler	4,906,502 A	3/1990	Rudy
1,916,483 A	7/1933	Krichbaum	4,912,861 A	4/1990	Huang
1,970,803 A	8/1934	Johnson	4,936,029 A	6/1990	Rudy
2,004,906 A	6/1935	Simister	4,965,899 A	10/1990	Sekido et al.
2,080,469 A	5/1937	Gilbert	4,972,611 A	11/1990	Swartz et al.
2,086,389 A	7/1937	Pearson	4,991,317 A	2/1991	Lakic
2,269,342 A	1/1942	Johnson	4,999,931 A	3/1991	Vermeulen
2,365,807 A	12/1944	Dialynas	4,999,932 A	3/1991	Grim
2,488,382 A	11/1949	Davis	5,014,449 A	5/1991	Richard et al.
2,546,827 A	3/1951	Lavinthal	5,022,109 A	6/1991	Pekar
2,600,239 A	6/1952	Gilbert	5,025,575 A	6/1991	Lakic
2,645,865 A	7/1953	Town	5,042,176 A	8/1991	Rudy
2,677,906 A	5/1954	Reed	5,044,030 A	9/1991	Balaton
2,703,770 A	3/1955	Melzer	5,046,267 A	9/1991	Kilgore et al.
2,748,401 A	6/1956	Winstead	5,083,361 A	1/1992	Rudy
2,762,134 A	9/1956	Town	5,104,477 A	4/1992	Williams et al.
3,030,640 A	4/1962	Gosman	5,131,174 A	7/1992	Drew et al.
3,048,514 A	8/1962	Bentele et al.	5,155,927 A	10/1992	Bates et al.
3,120,712 A	2/1964	Menken	5,158,767 A	10/1992	Cohen et al.
3,121,430 A	2/1964	O'Reilly	5,179,792 A	1/1993	Brantingham
3,204,678 A	9/1965	Worcester	5,193,246 A	3/1993	Huang
3,251,076 A	5/1966	Burke	5,199,191 A	4/1993	Moumdjian
3,284,264 A	11/1966	O'Rourke	5,224,277 A	7/1993	Sang Do
3,335,045 A	8/1967	Post	5,224,278 A	7/1993	Jeon
3,366,525 A	1/1968	Jackson	5,228,156 A	7/1993	Wang
3,469,576 A	9/1969	Smith et al.	5,235,715 A	8/1993	Donzis
3,568,227 A	3/1971	Dunham	5,238,231 A	8/1993	Huang
3,589,037 A	6/1971	Gallagher	5,245,766 A	9/1993	Warren
3,608,215 A	9/1971	Fukuoka	5,253,435 A	10/1993	Auger et al.
3,685,176 A	8/1972	Rudy	5,257,470 A	11/1993	Auger et al.
3,758,964 A	9/1973	Nishimura	5,297,349 A	3/1994	Kilgore
3,765,422 A	10/1973	Smith	5,335,382 A	8/1994	Huang
4,017,931 A	4/1977	Golden	5,337,492 A	8/1994	Anderie et al.
4,054,960 A	10/1977	Pettit et al.	5,353,459 A	10/1994	Potter et al.
4,115,934 A	9/1978	Hall	5,353,523 A	10/1994	Kilgore et al.
4,123,855 A	11/1978	Thedford	5,355,552 A	10/1994	Huang
4,129,951 A	12/1978	Petrosky	5,367,791 A	11/1994	Gross et al.
4,167,795 A	9/1979	Lambert, Jr.	5,406,719 A	4/1995	Potter
4,183,156 A	1/1980	Rudy	5,425,184 A	6/1995	Lyden et al.
4,187,620 A	2/1980	Seiner	5,493,792 A	2/1996	Bates et al.
4,217,705 A	8/1980	Donzis	5,543,194 A	8/1996	Rudy
4,219,945 A	9/1980	Rudy	5,545,463 A	8/1996	Schmidt et al.
4,271,606 A	6/1981	Rudy	5,558,395 A	9/1996	Huang
4,287,250 A	9/1981	Rudy	5,572,804 A	11/1996	Skaja et al.
4,292,702 A	10/1981	Phillips	5,595,004 A	1/1997	Lyden et al.
4,297,797 A	11/1981	Meyers	5,625,964 A	5/1997	Lyden et al.
4,305,212 A	12/1981	Coomer	5,669,161 A	9/1997	Huang
4,328,599 A	5/1982	Mollura	5,686,167 A	11/1997	Rudy
4,358,902 A	11/1982	Cole et al.	5,704,137 A	1/1998	Dean et al.
4,431,003 A	2/1984	Sztancsik	5,713,141 A	2/1998	Mitchell et al.
4,446,634 A	5/1984	Johnson et al.	5,741,568 A	4/1998	Rudy
4,458,430 A	7/1984	Peterson	5,753,061 A	5/1998	Rudy
4,483,030 A	11/1984	Plick et al.	5,755,001 A	5/1998	Potter et al.
4,486,964 A	12/1984	Rudy	5,771,606 A	6/1998	Litchfield et al.
4,506,460 A	3/1985	Rudy	5,802,739 A	9/1998	Potter et al.
4,547,919 A	10/1985	Wang	5,830,553 A	11/1998	Huang
4,662,087 A	5/1987	Beuch	5,832,630 A	11/1998	Potter
4,670,995 A	6/1987	Huang	5,846,063 A	12/1998	Lakic
4,686,130 A	8/1987	Kon	5,902,660 A	5/1999	Huang
4,698,864 A	10/1987	Graebe	5,907,911 A	6/1999	Huang
4,722,131 A	2/1988	Huang	5,916,664 A	6/1999	Rudy
4,744,157 A	5/1988	Dubner	5,925,306 A	7/1999	Huang
4,779,359 A	10/1988	Famolare, Jr.	5,937,462 A	8/1999	Huang
4,782,602 A	11/1988	Lakic	5,952,065 A	9/1999	Mitchell et al.
4,803,029 A	2/1989	Iversen et al.	5,976,451 A	11/1999	Skaja et al.
4,817,304 A	4/1989	Parker et al.	5,979,078 A	11/1999	McLaughlin
4,823,482 A	4/1989	Lakic	5,987,780 A	11/1999	Lyden et al.
4,845,338 A	7/1989	Lakic	5,993,585 A	11/1999	Goodwin et al.
4,845,861 A	7/1989	Moumgdgian	6,009,637 A	1/2000	Pavone
4,874,640 A	10/1989	Donzis	6,013,340 A	1/2000	Bonk et al.
4,891,855 A	1/1990	Cheng-Chung	6,027,683 A	2/2000	Huang
			6,029,962 A	2/2000	Shorten et al.
			6,055,746 A	5/2000	Lyden et al.

US 7,401,420 B2

Page 3

6,065,150 A	5/2000	Huang	CN	54221	6/1978
6,098,313 A	8/2000	Skaja	DE	32 34 086	9/1982
6,119,371 A	9/2000	Goodwin et al.	DE	92 01 758.4	12/1992
6,127,010 A	10/2000	Rudy	EP	0 094 868	5/1983
6,128,837 A	10/2000	Huang	EP	0 215 974 A1	9/1985
6,192,606 B1	2/2001	Pavone	EP	0 605 485 B1	9/1992
6,253,466 B1	7/2001	Harmon-Weiss	FR	1195549	11/1959
6,374,514 B1	4/2002	Swigart	FR	1406610	11/1965
6,457,262 B1	10/2002	Swigart	FR	2144464	1/1973
6,550,085 B2	4/2003	Roux	FR	2404413	4/1979
6,665,958 B2	12/2003	Goodwin	FR	2407008	5/1979
6,783,184 B2	8/2004	DiBattista et al.	FR	2483321	4/1981
6,796,056 B2	9/2004	Swigart	FR	2614510	4/1987
6,837,951 B2	1/2005	Rapaport	FR	2639537	11/1988
6,889,451 B2	5/2005	Passke et al.	GB	7441	0/1906
6,918,198 B2	7/2005	Chi	GB	14955	0/1893
6,931,764 B2	8/2005	Swigart et al.	GB	233387	1/1924
6,971,193 B1	12/2005	Potter et al.	GB	978654	12/1964
7,000,335 B2	2/2006	Swigart et al.	GB	1128764	10/1968
7,051,456 B2	5/2006	Swigart et al.	JP	4-266718	9/1992
7,070,845 B2	7/2006	Thomas et al.	JP	6-181802	1/1994
7,073,276 B2	7/2006	Swigart	WO	WO89/10074	11/1989
7,076,891 B2	7/2006	Goodwin	WO	WO90/10396	9/1990
7,086,179 B2	8/2006	Dojan et al.	WO	WO91/11928	8/1991
7,131,218 B2	11/2006	Schindler	WO	WO91/11931	8/1991
			WO	WO92/08384	5/1992
			WO	WO95/20332	8/1995
			WO	WO01/19211	3/2001

FOREIGN PATENT DOCUMENTS

AT	200963	12/1958
CA	727582	2/1966
CN	75100322	1/1975

OTHER PUBLICATIONS

Brooks Running Catalog, Fall 1991.

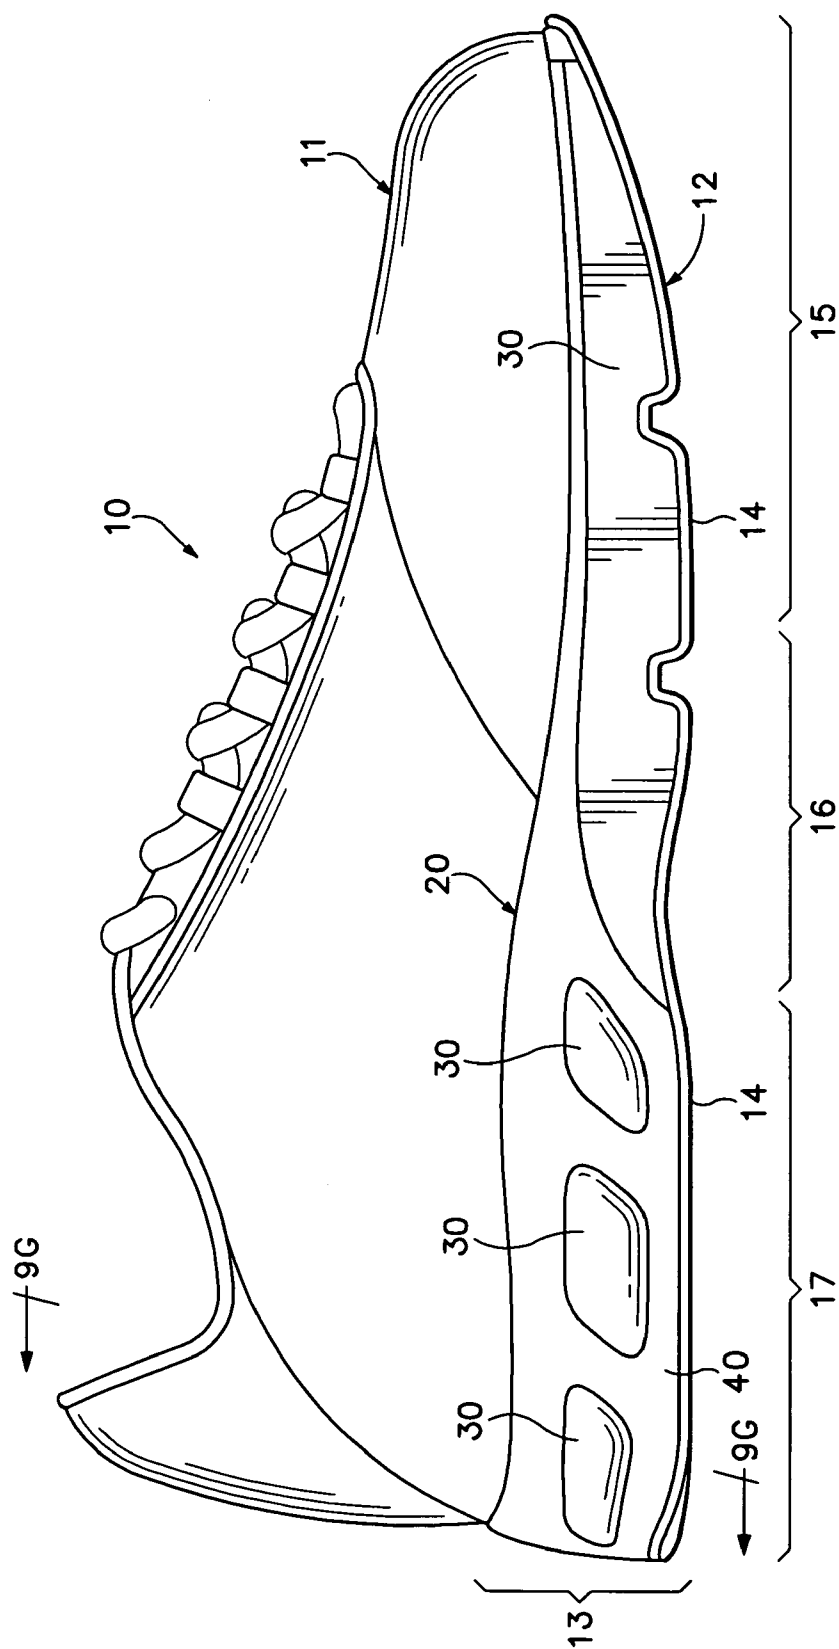
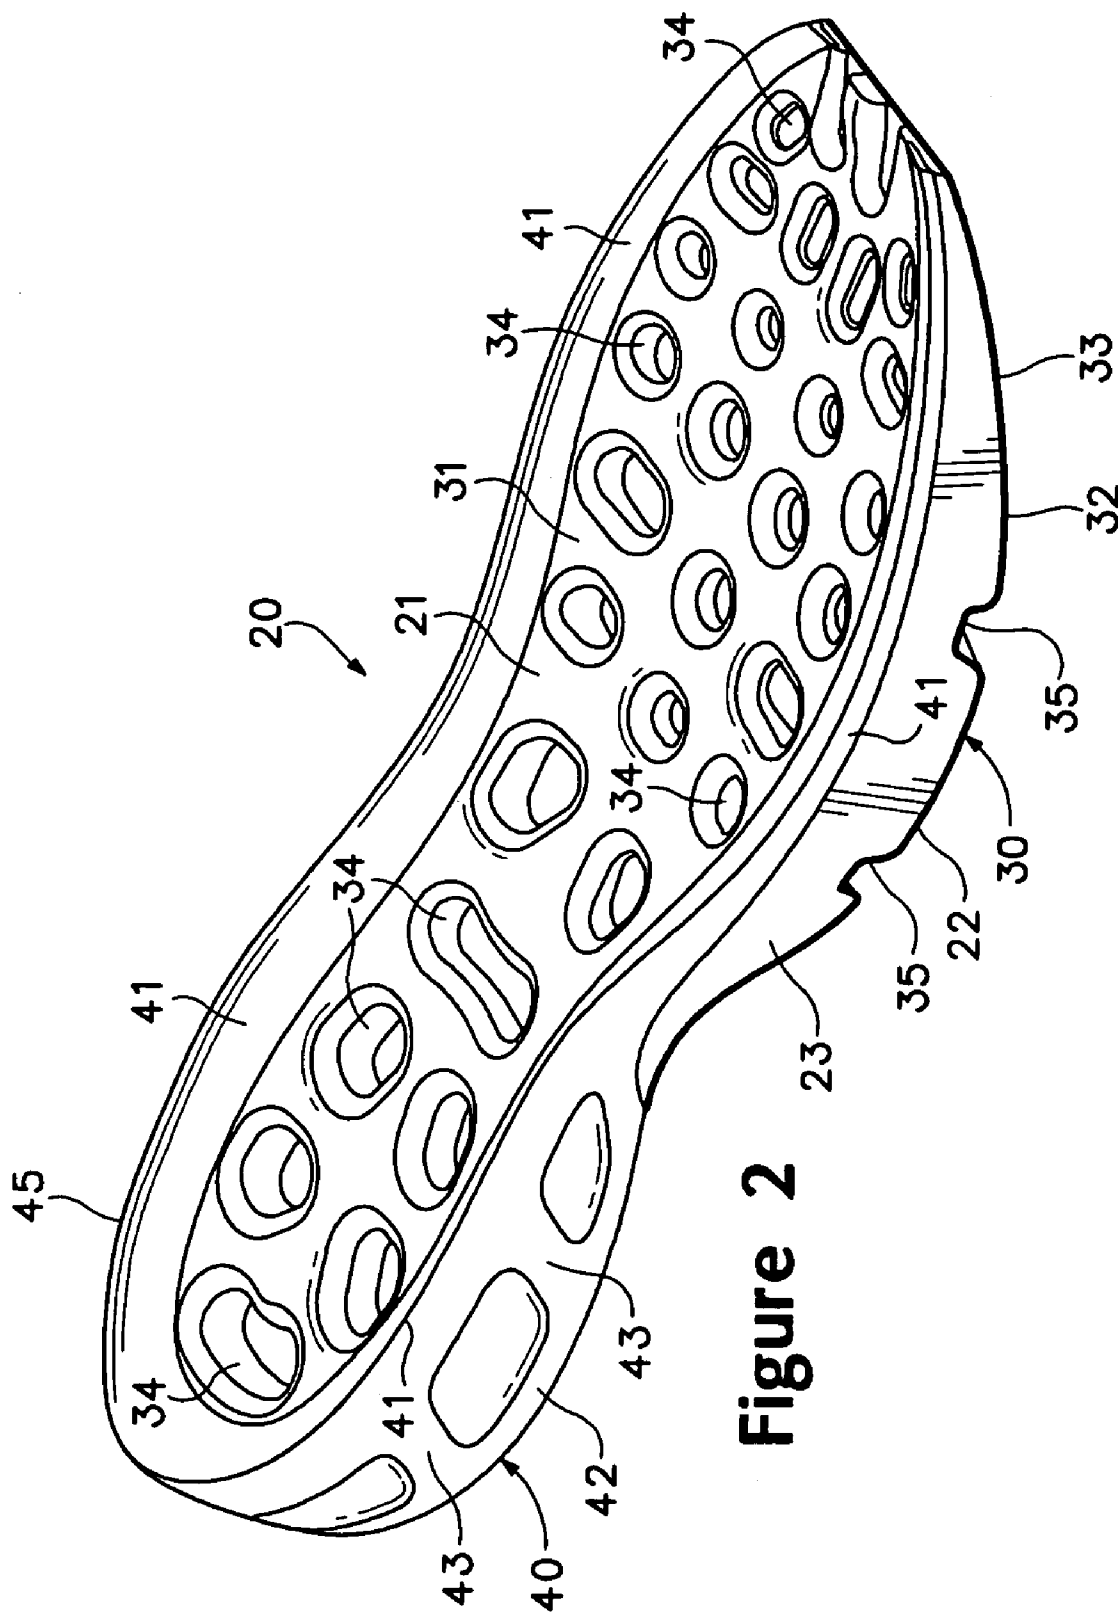
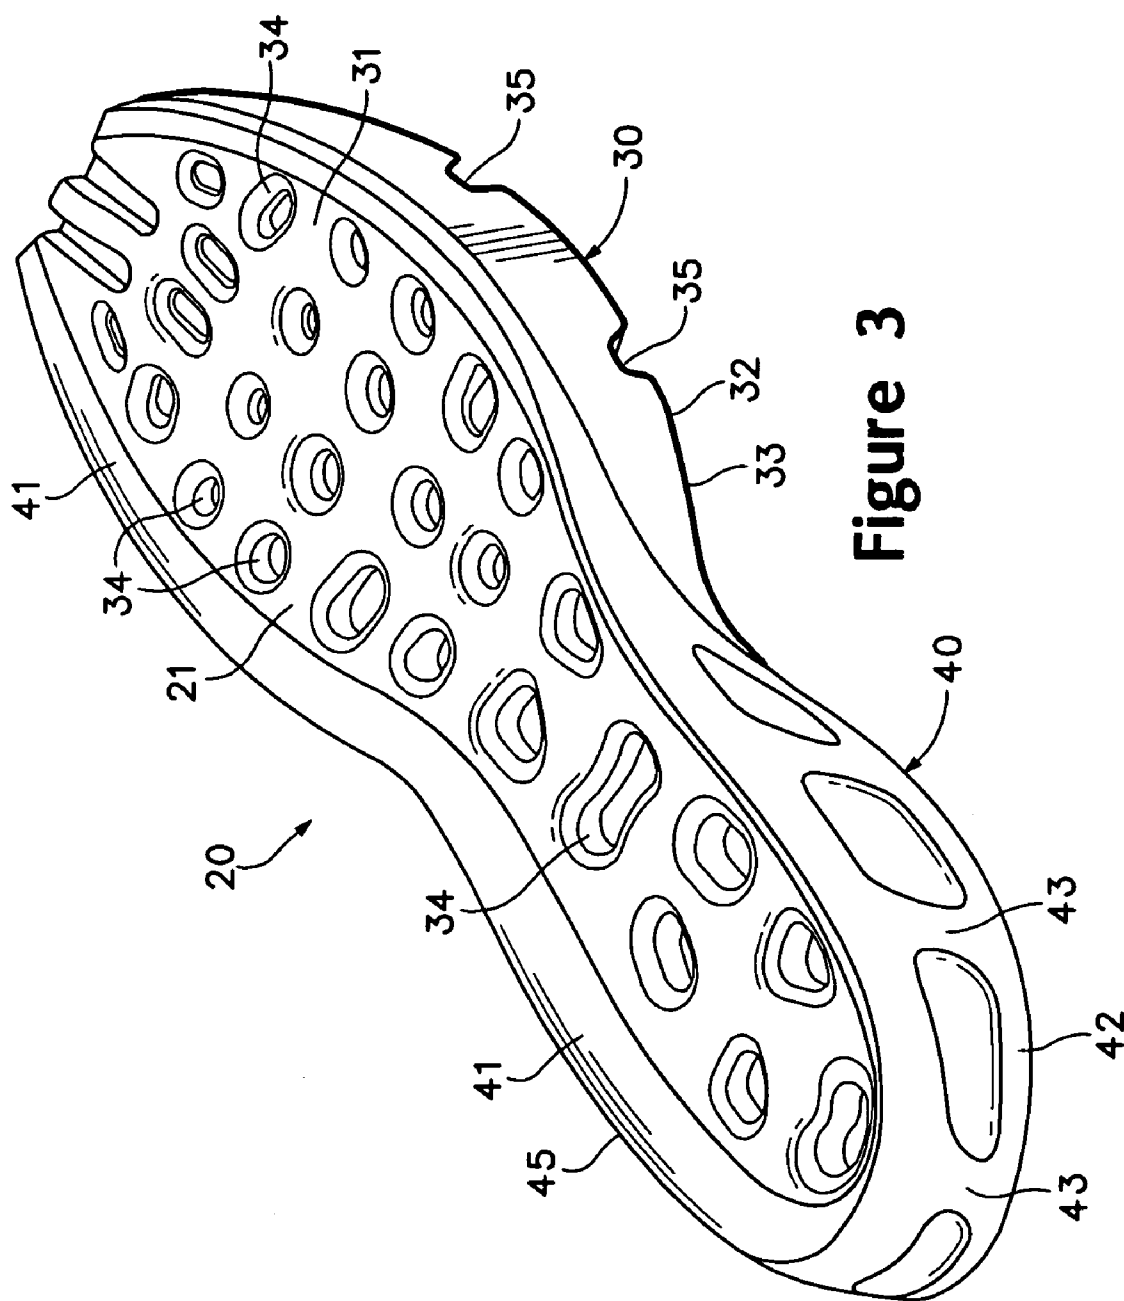
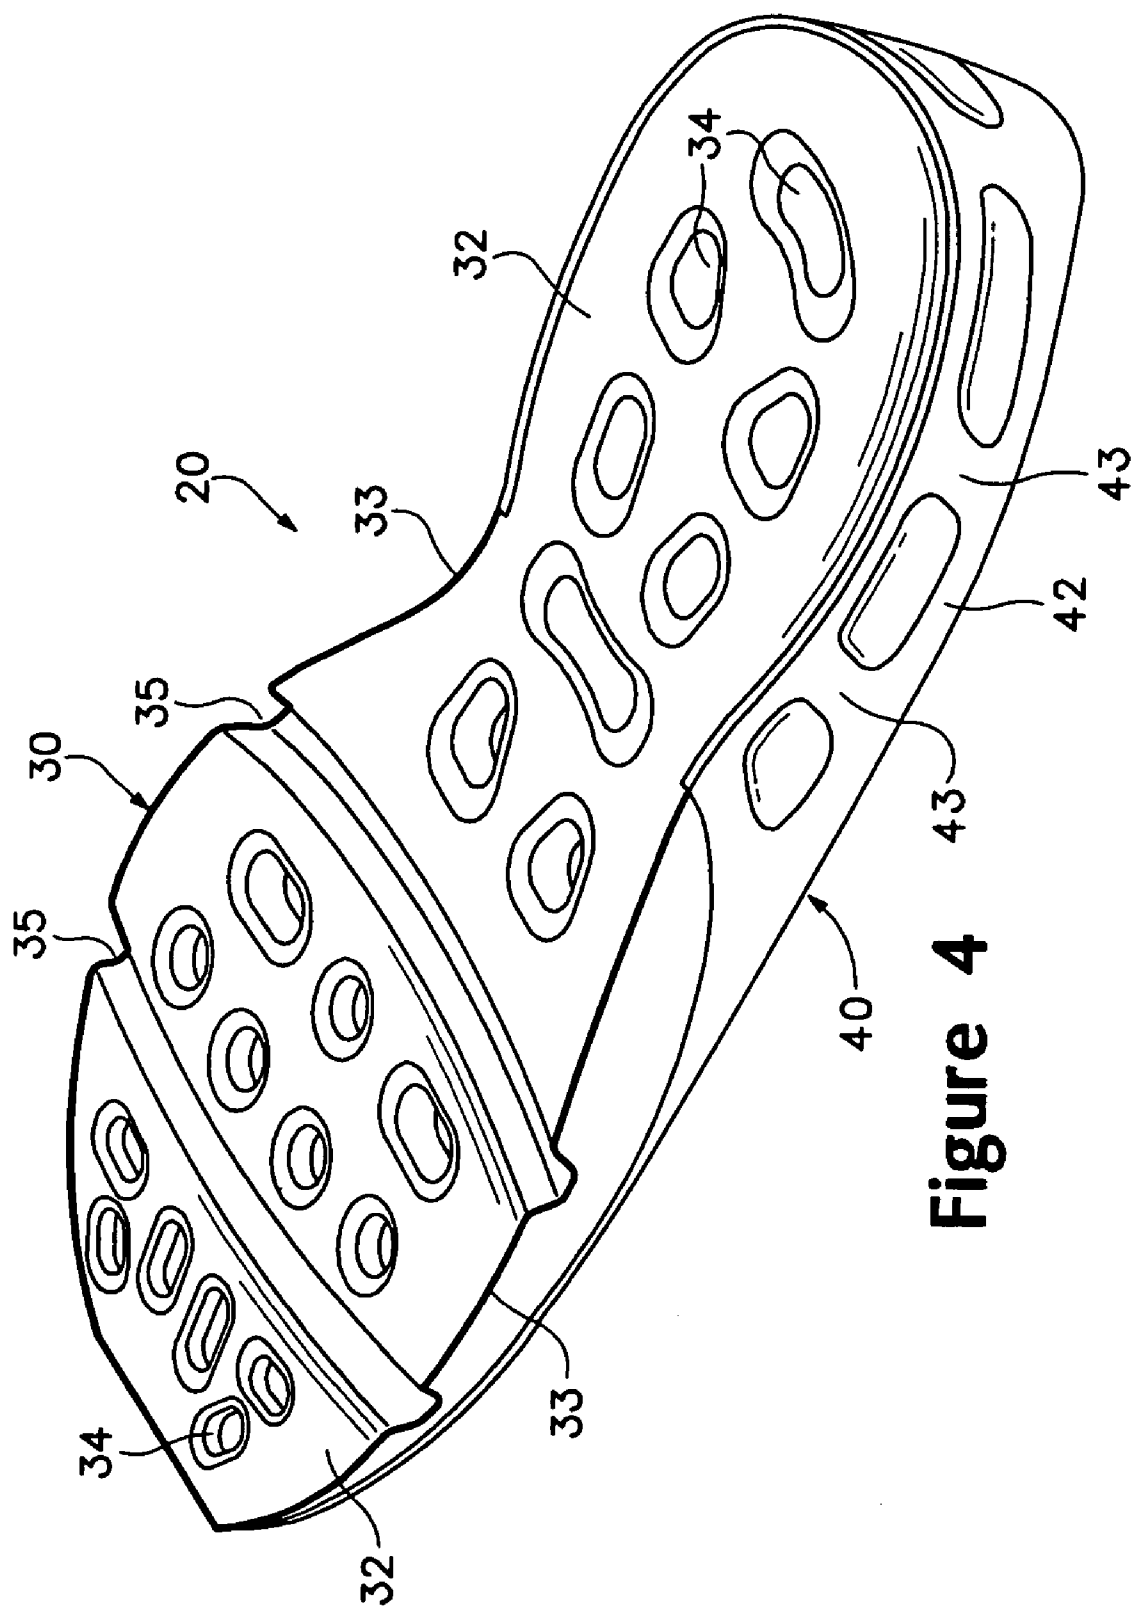


Figure 1







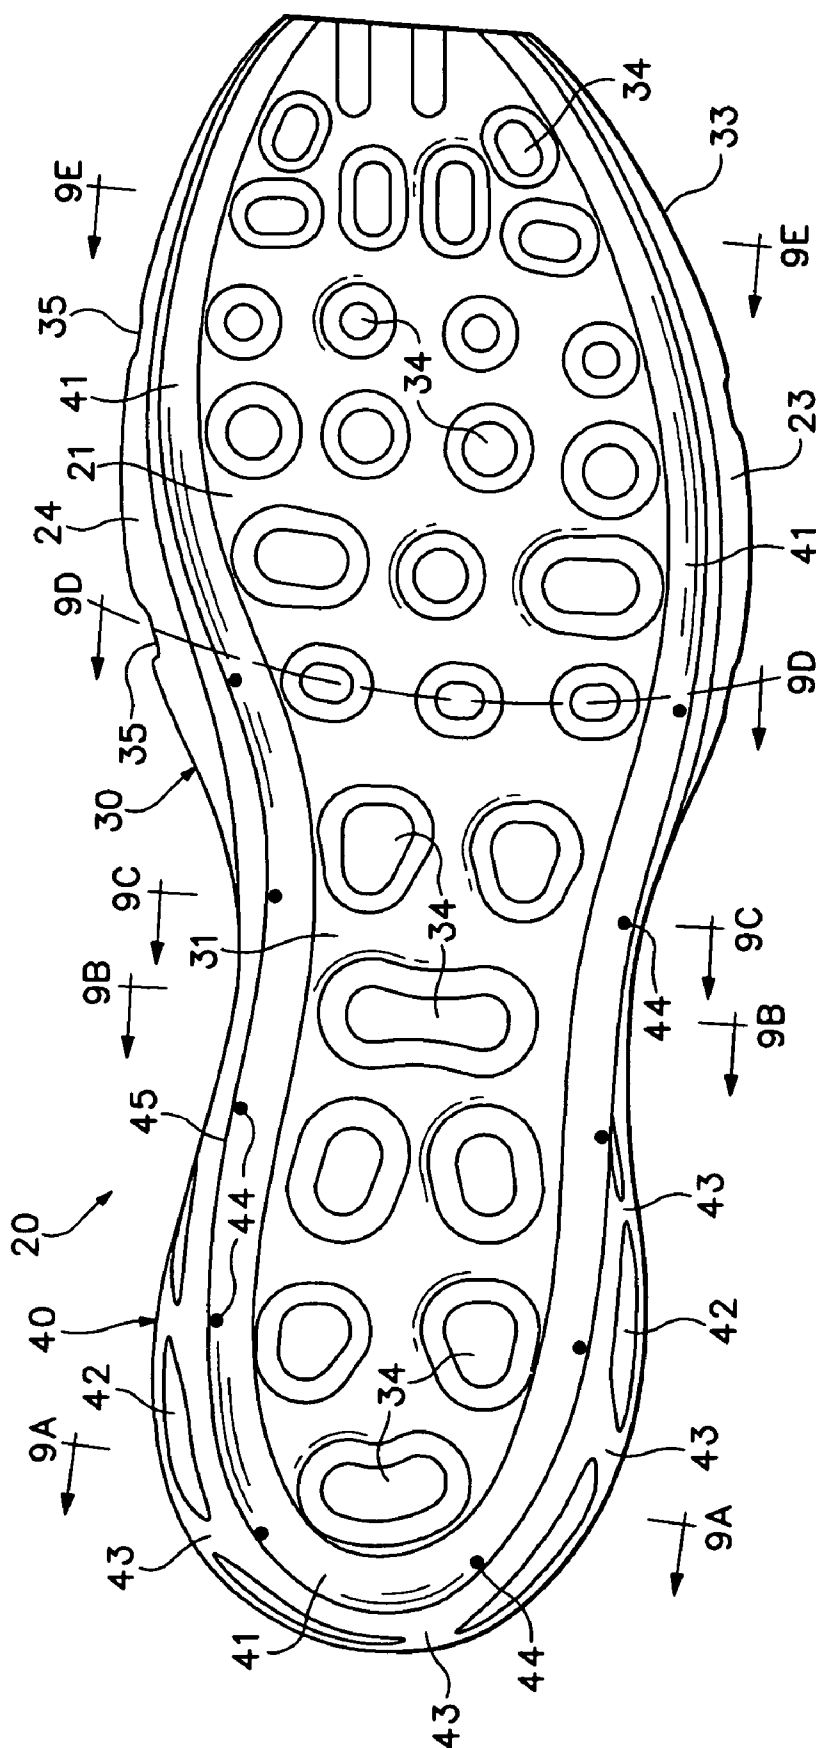


Figure 5

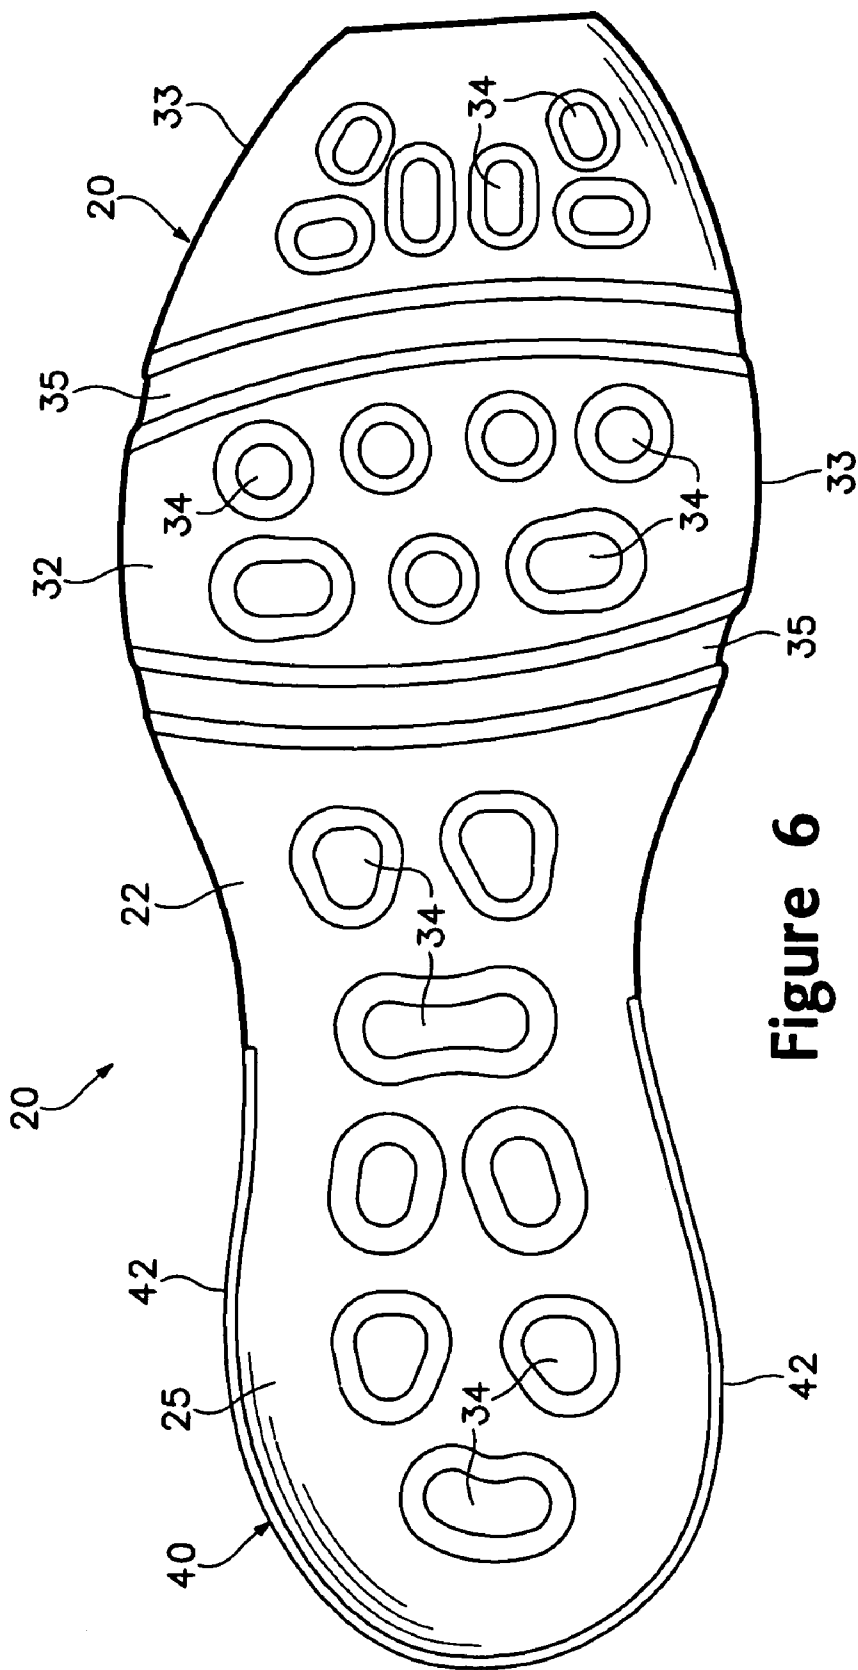


Figure 6

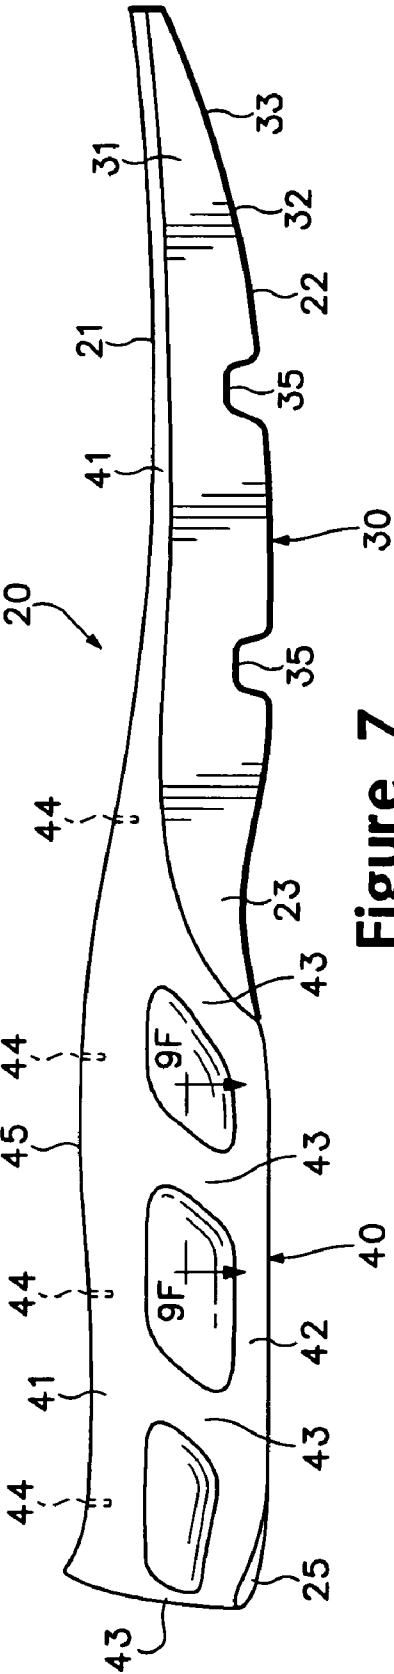


Figure 7

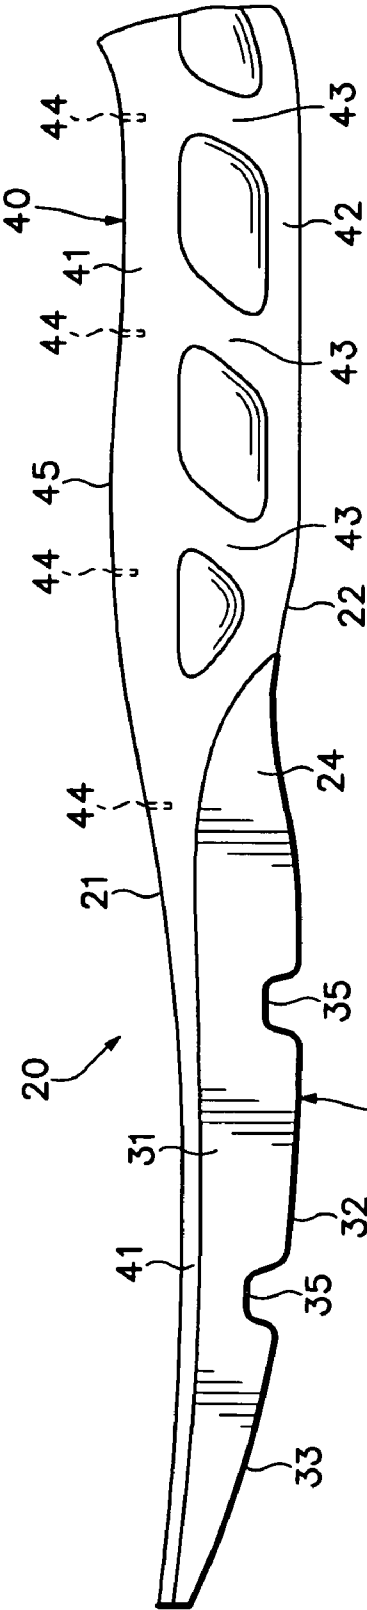


Figure 8

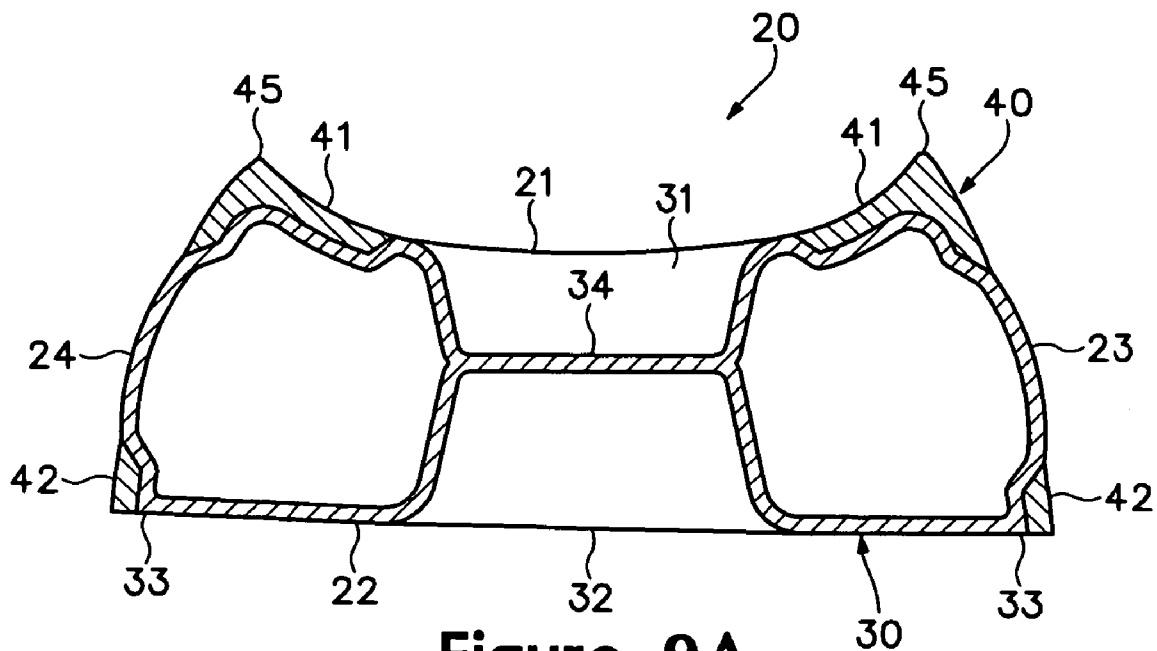


Figure 9A

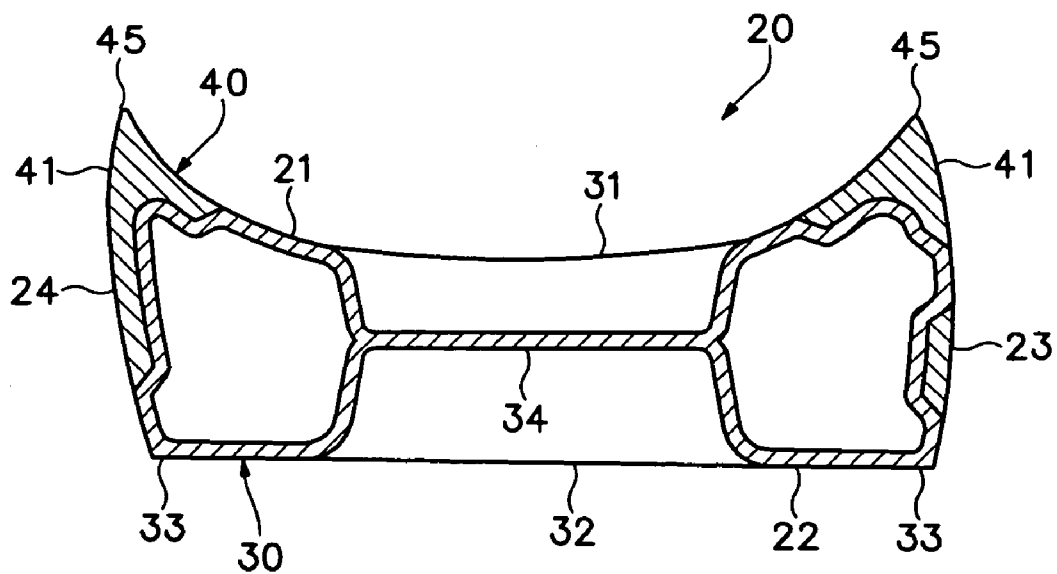


Figure 9B

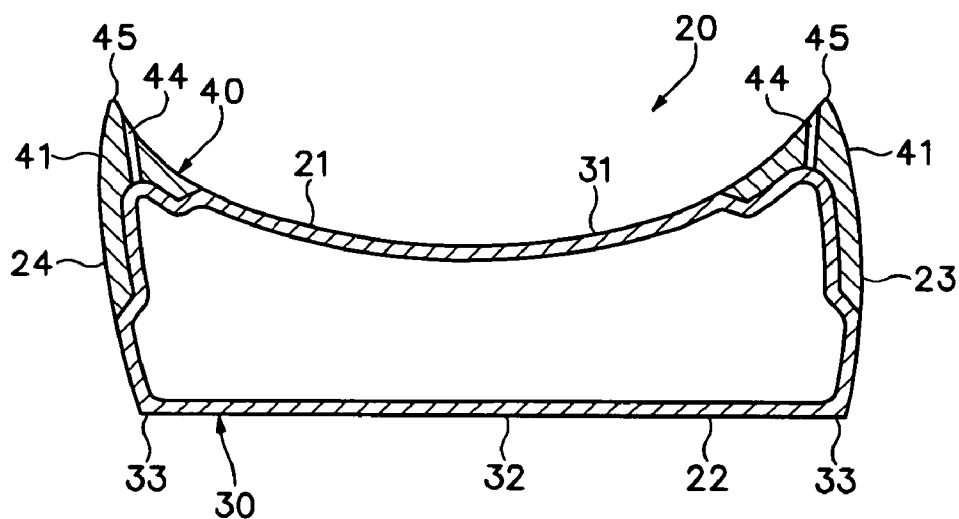


Figure 9C

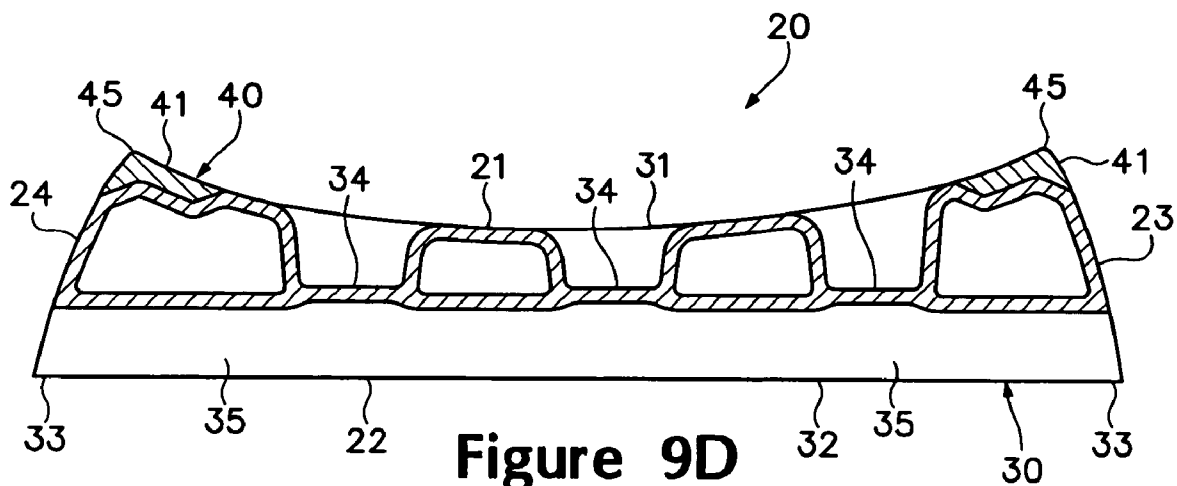


Figure 9D

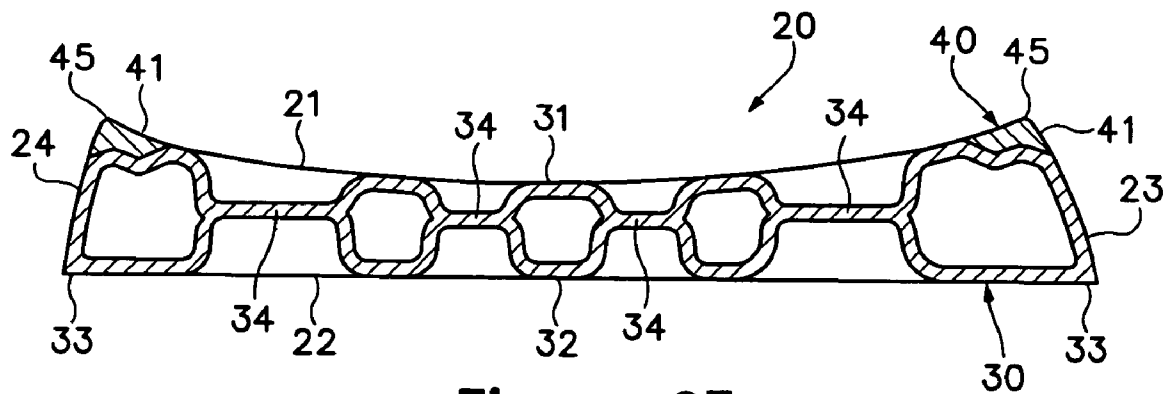


Figure 9E

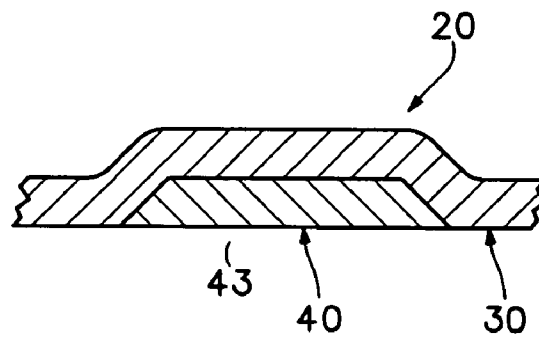


Figure 9F

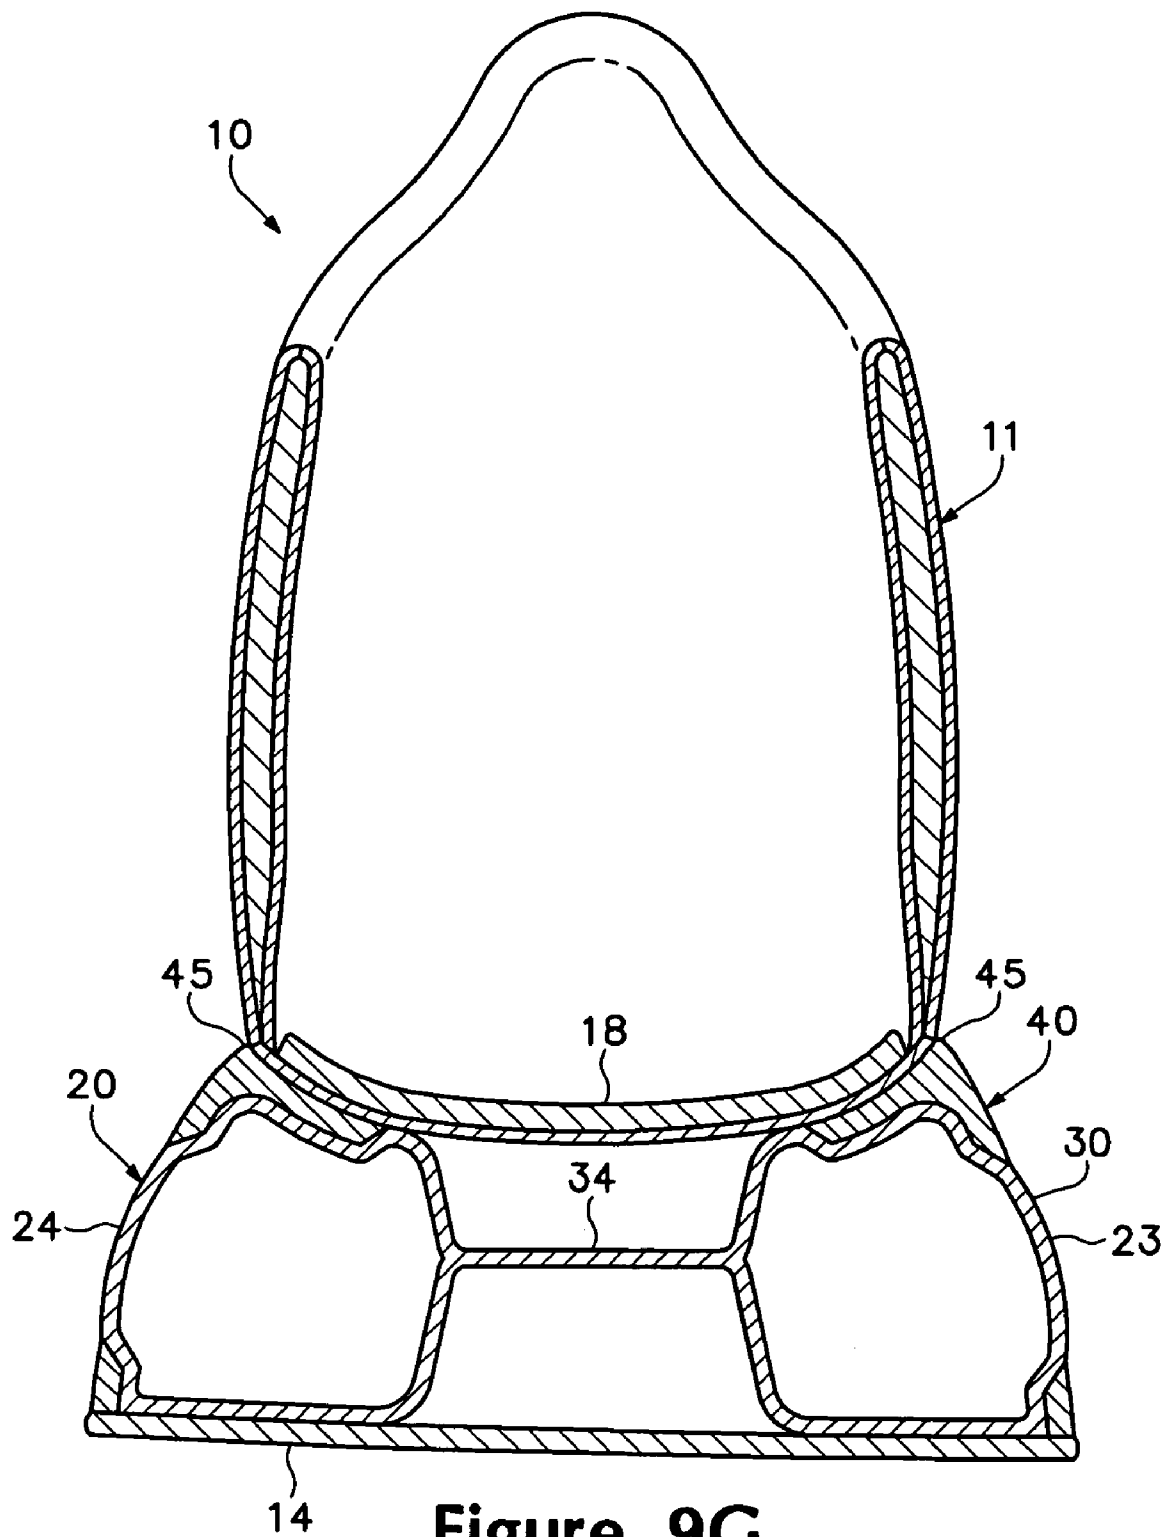
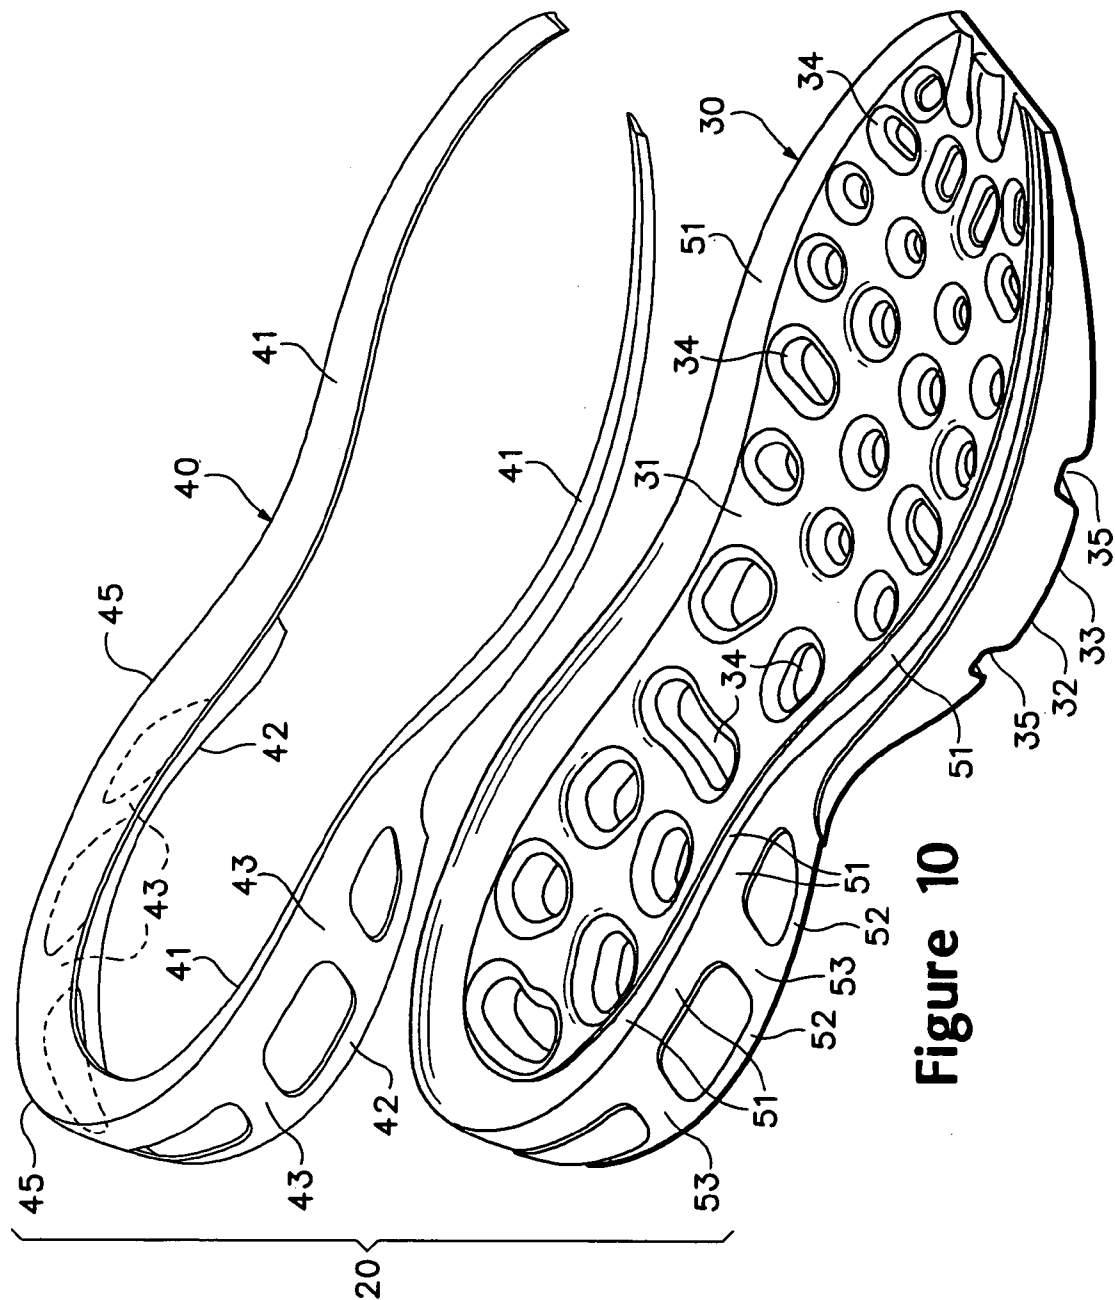
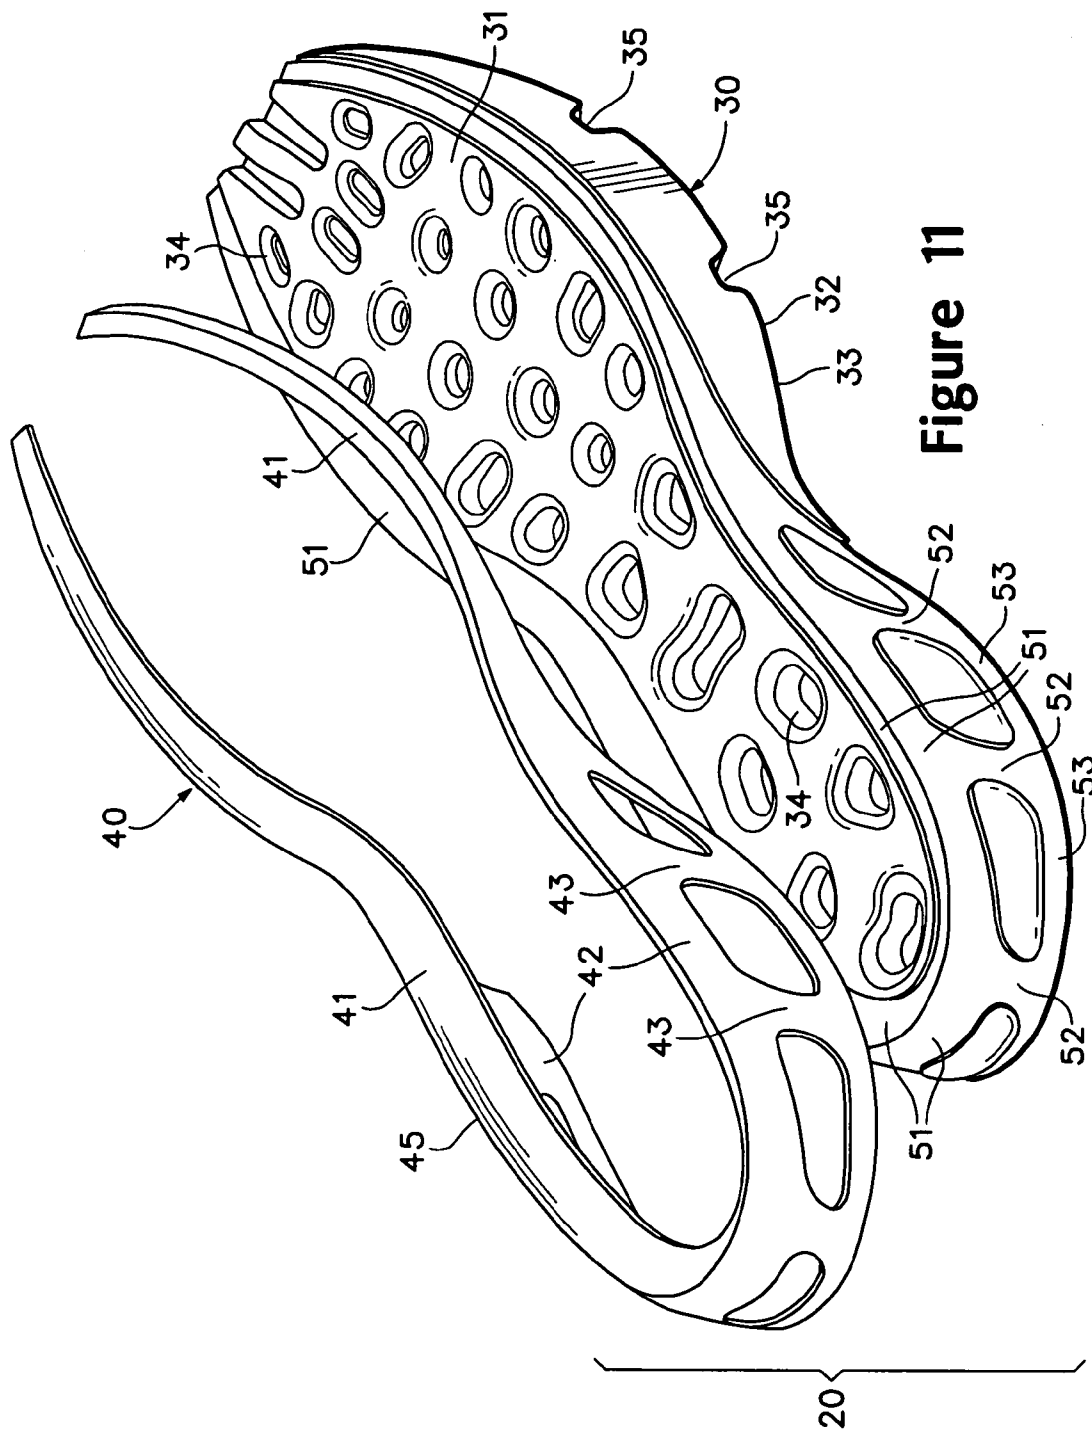


Figure 9G





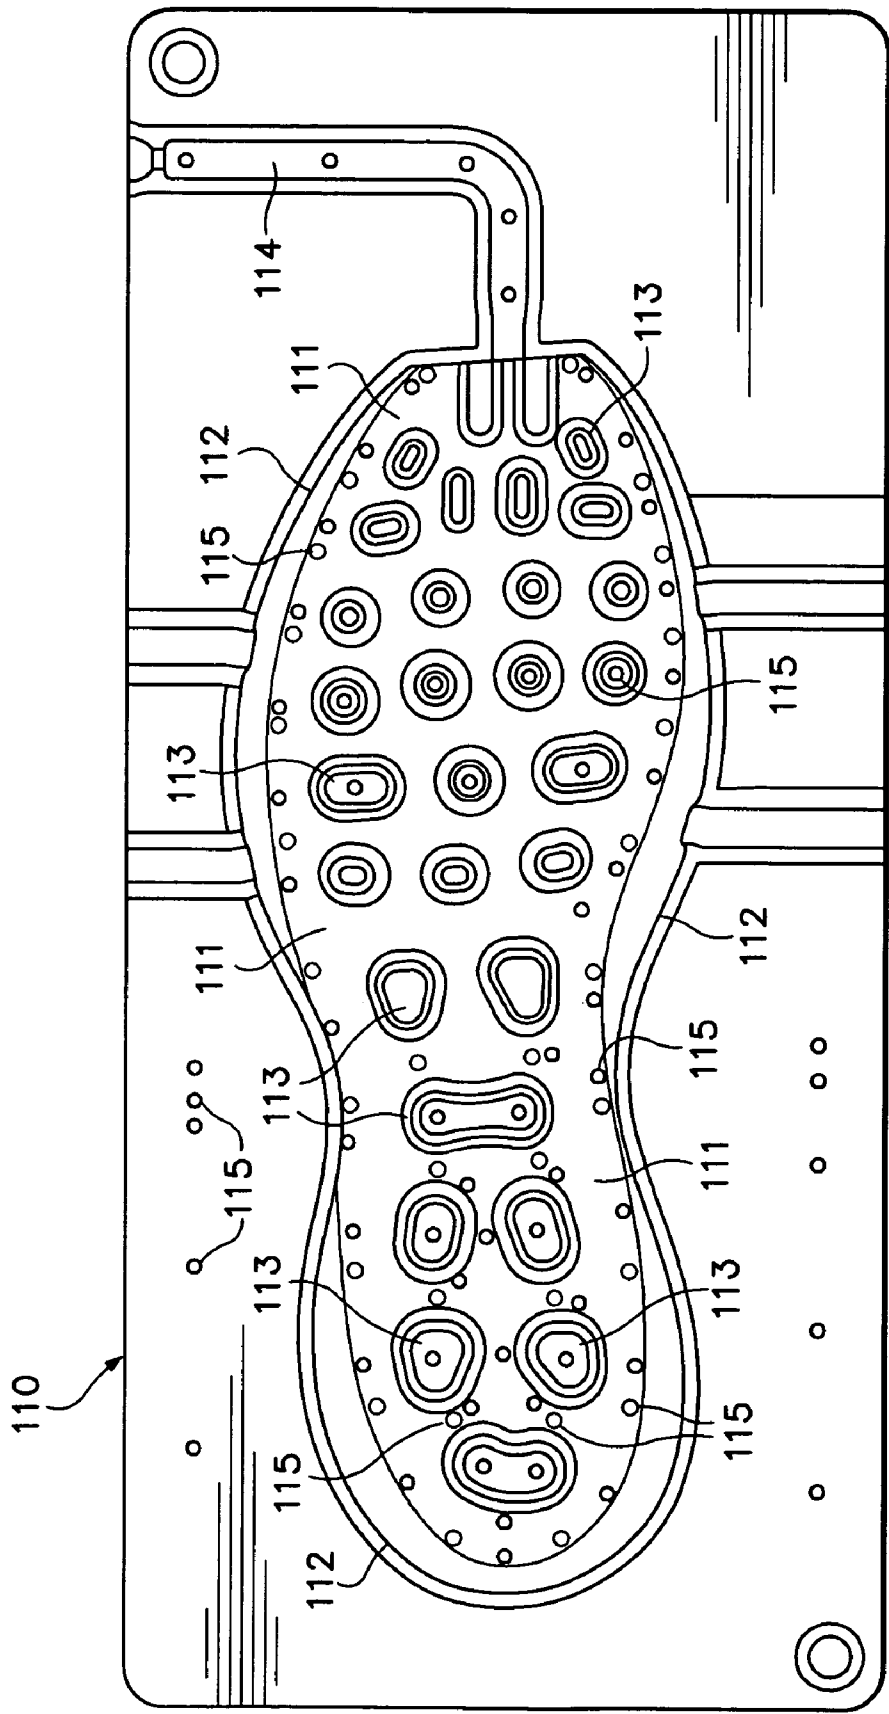


Figure 12A

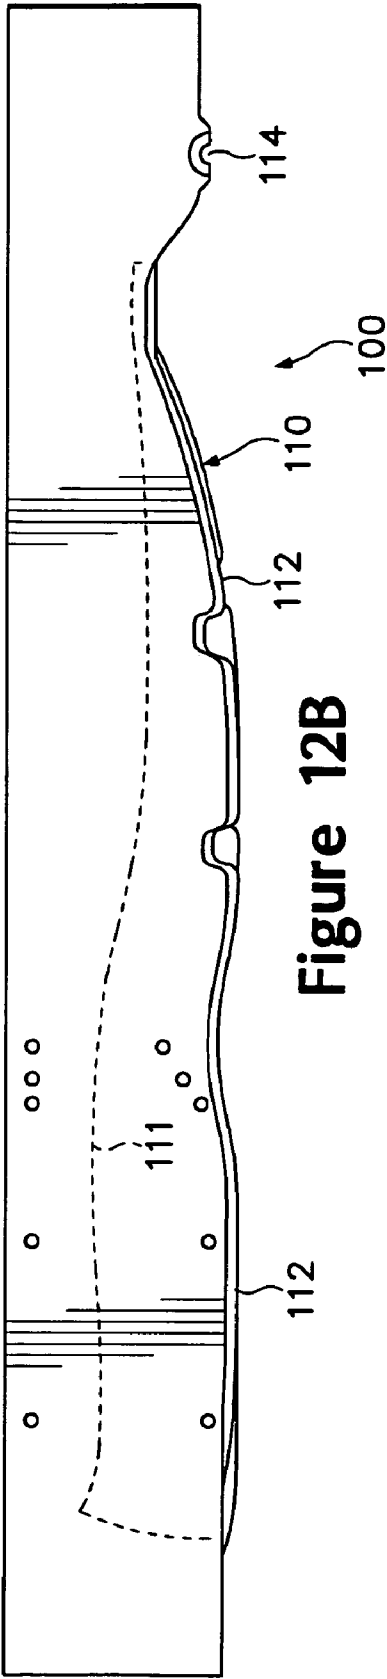


Figure 12B

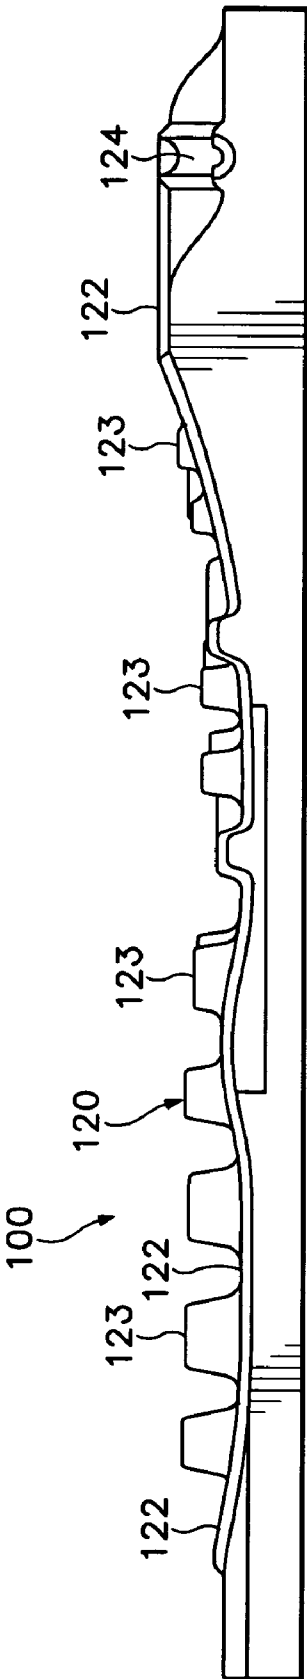


Figure 13B

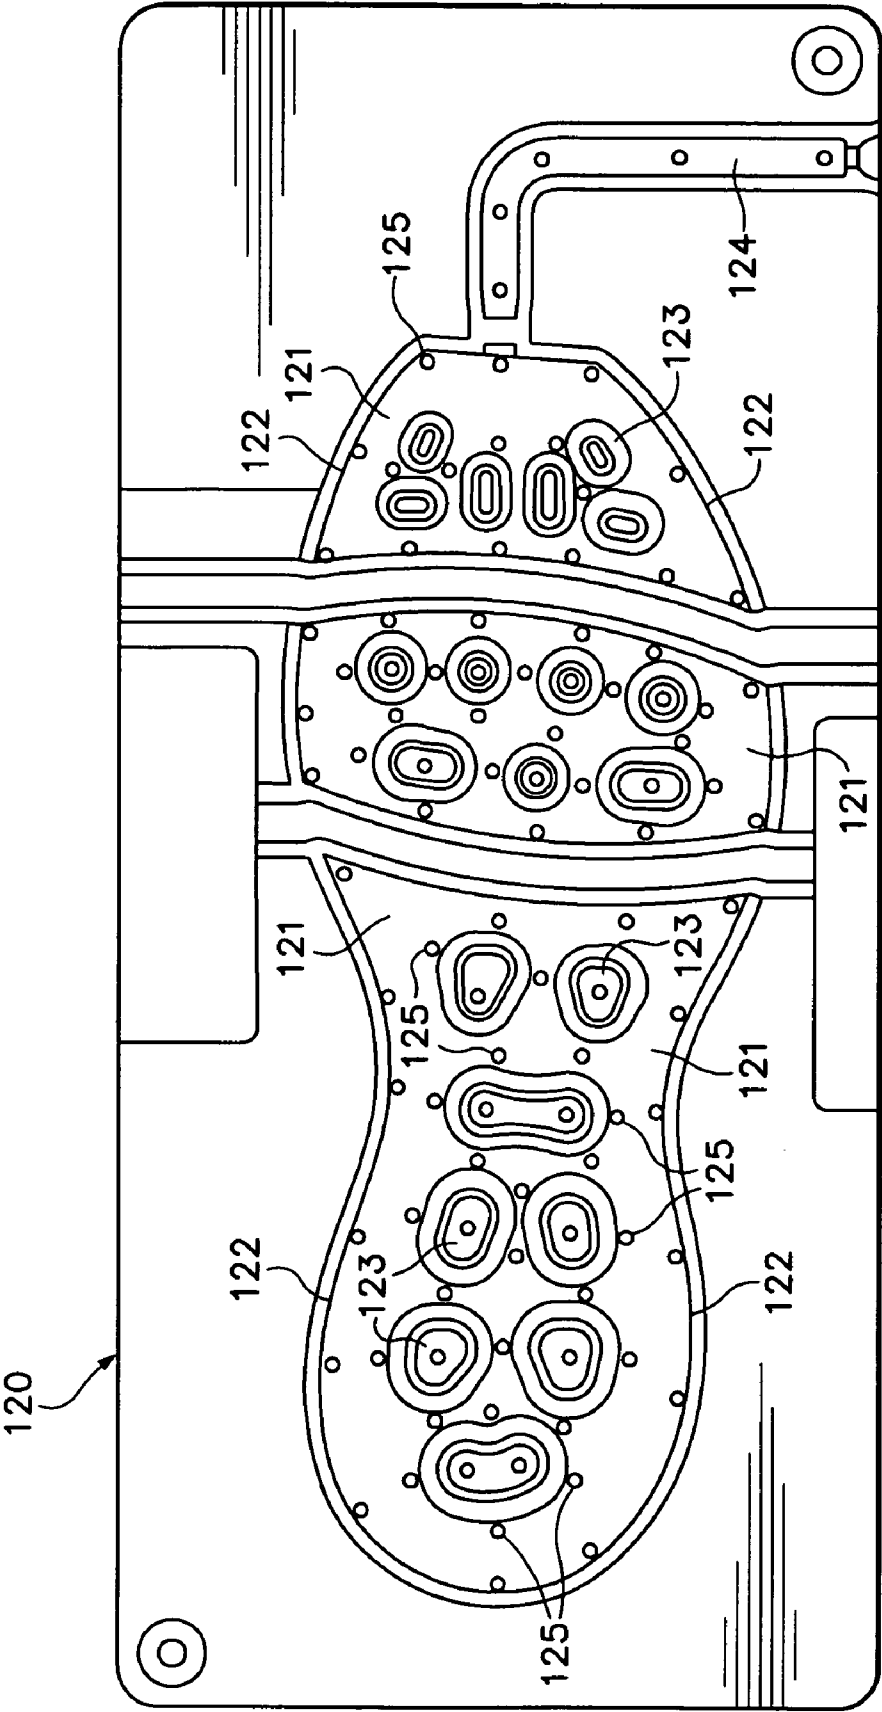


Figure 13A

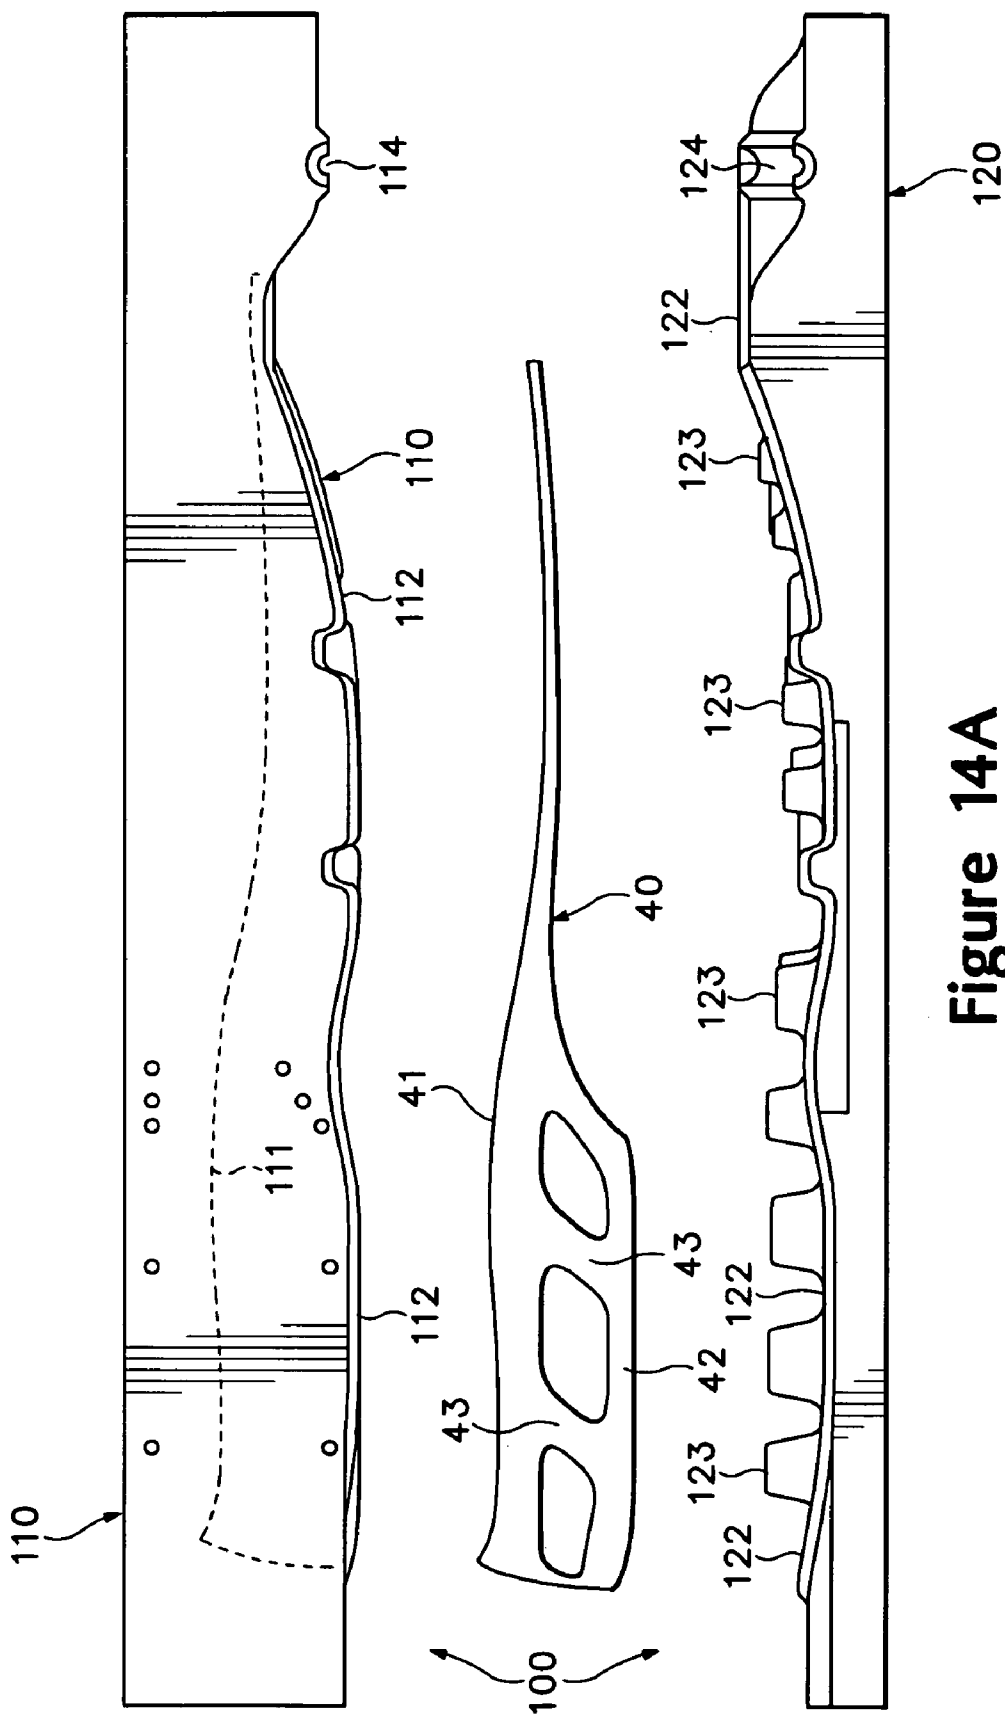


Figure 14A

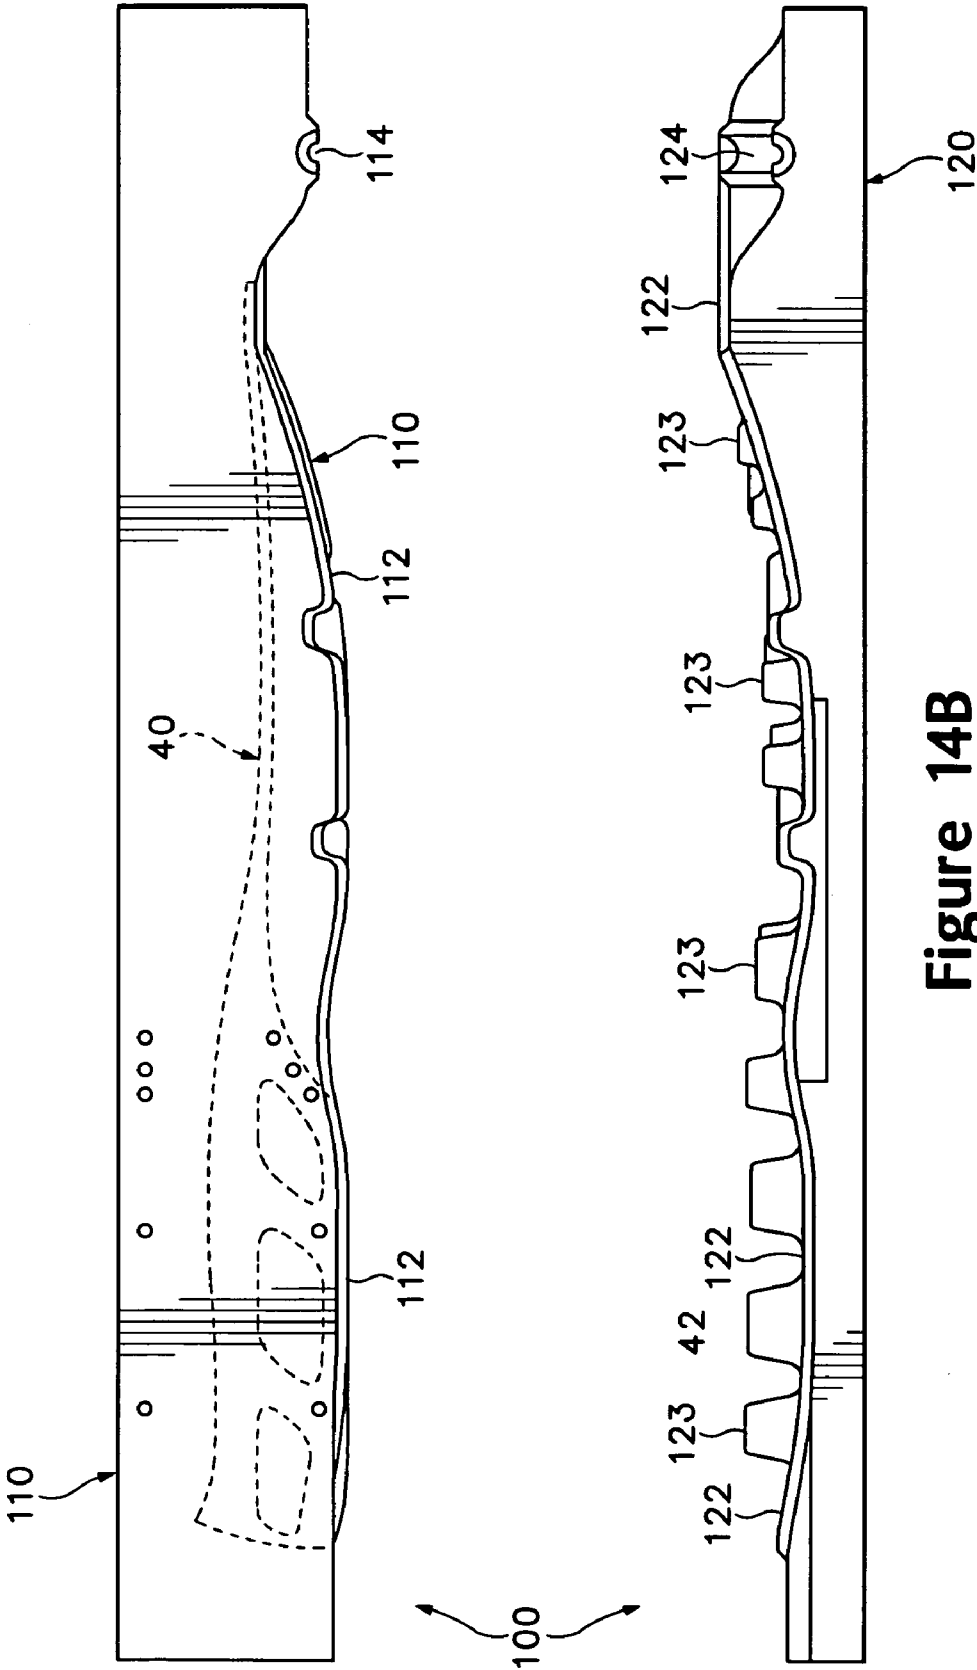


Figure 14B

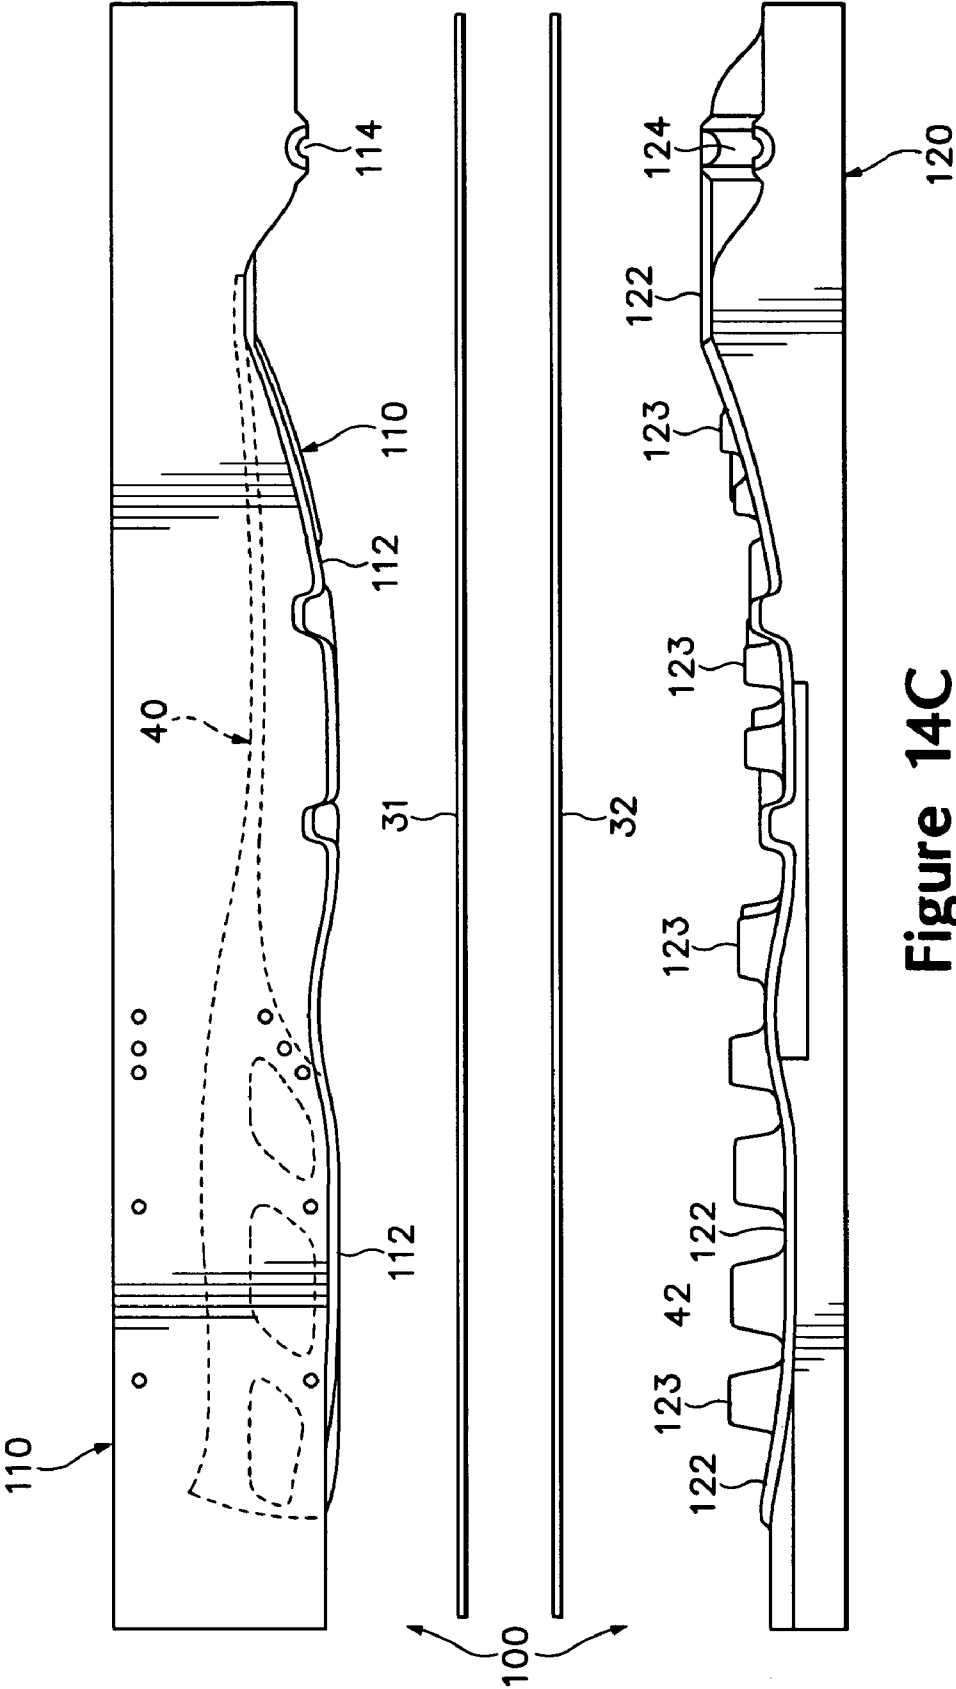


Figure 14C

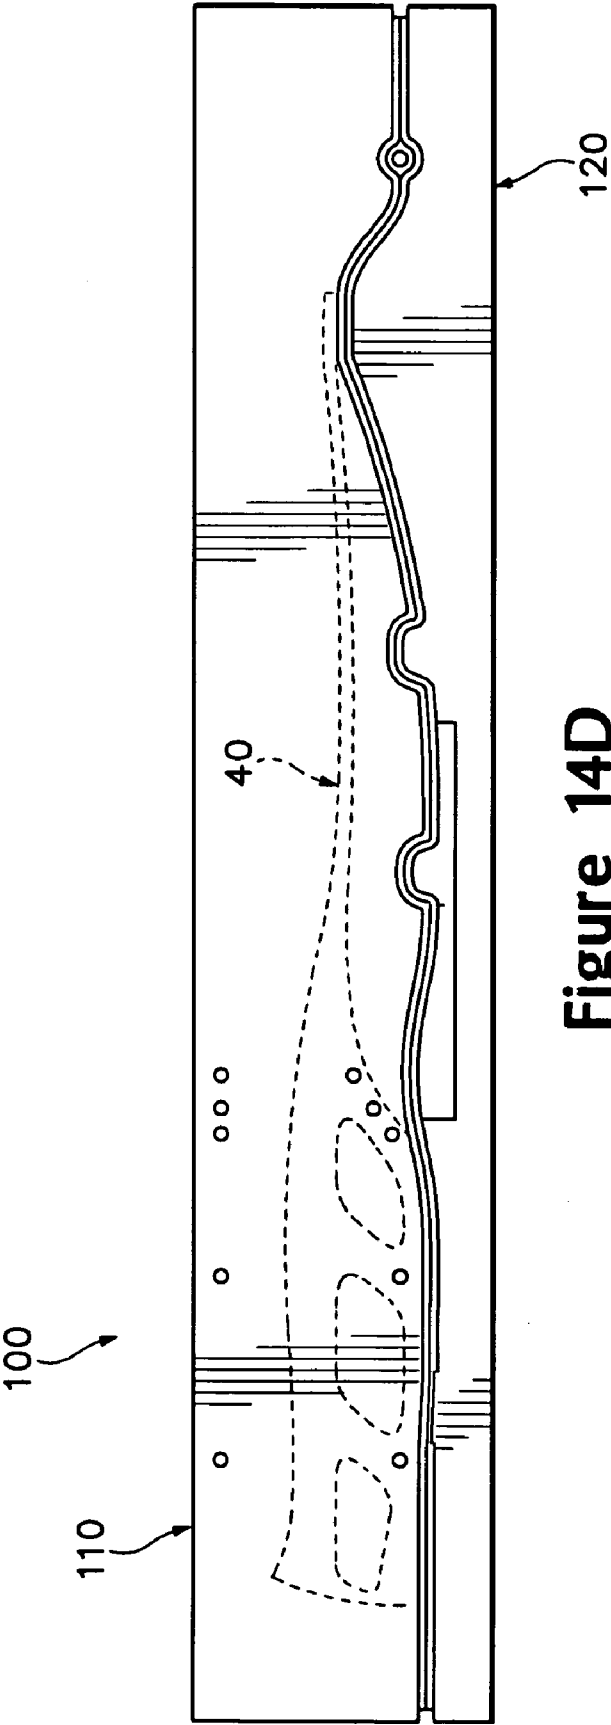


Figure 14D

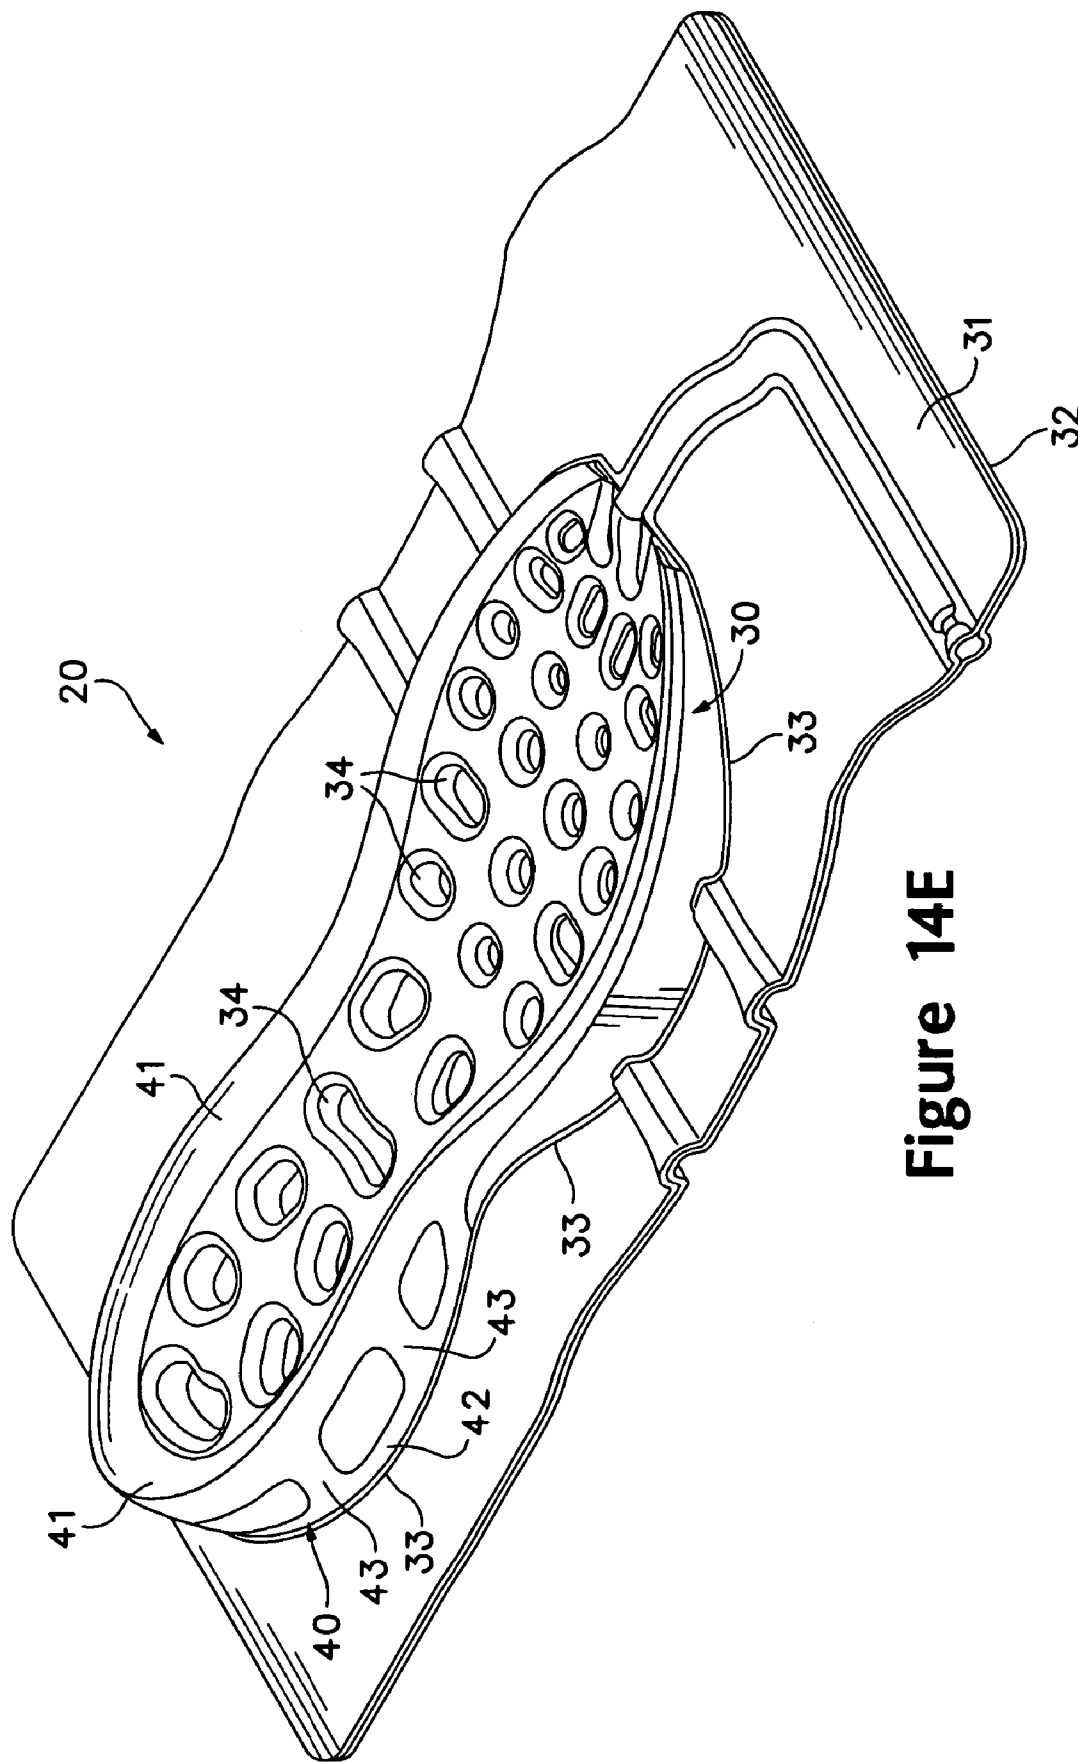
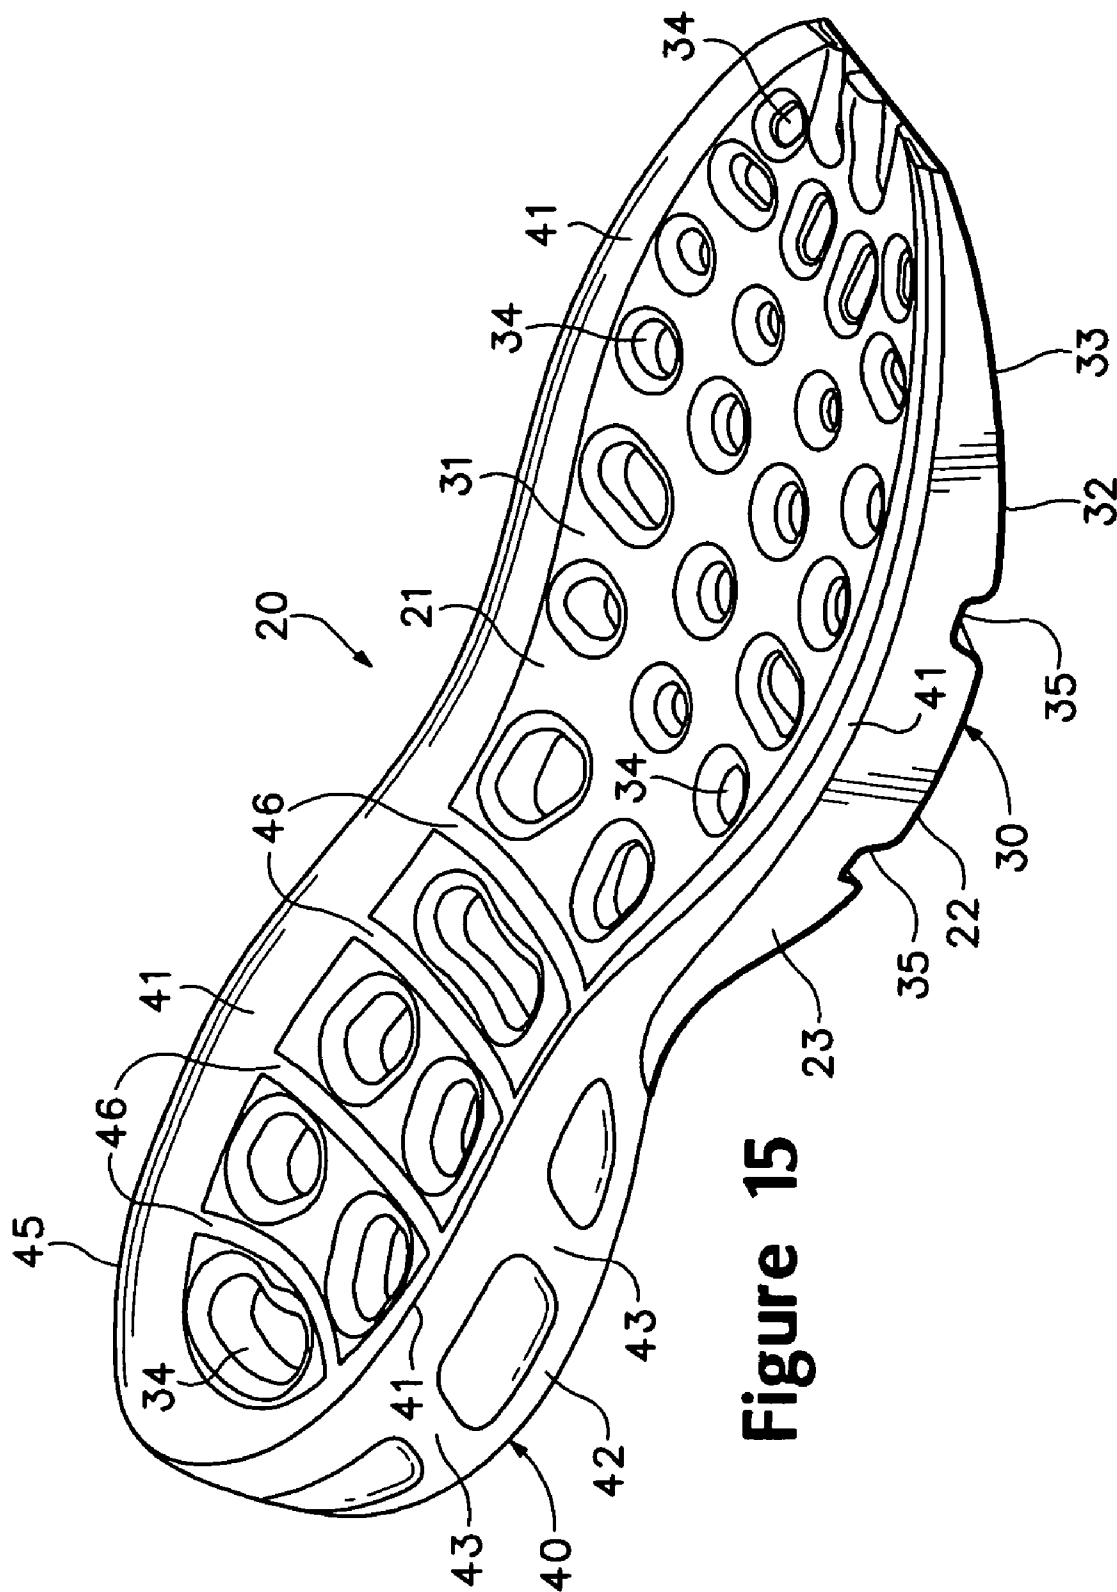
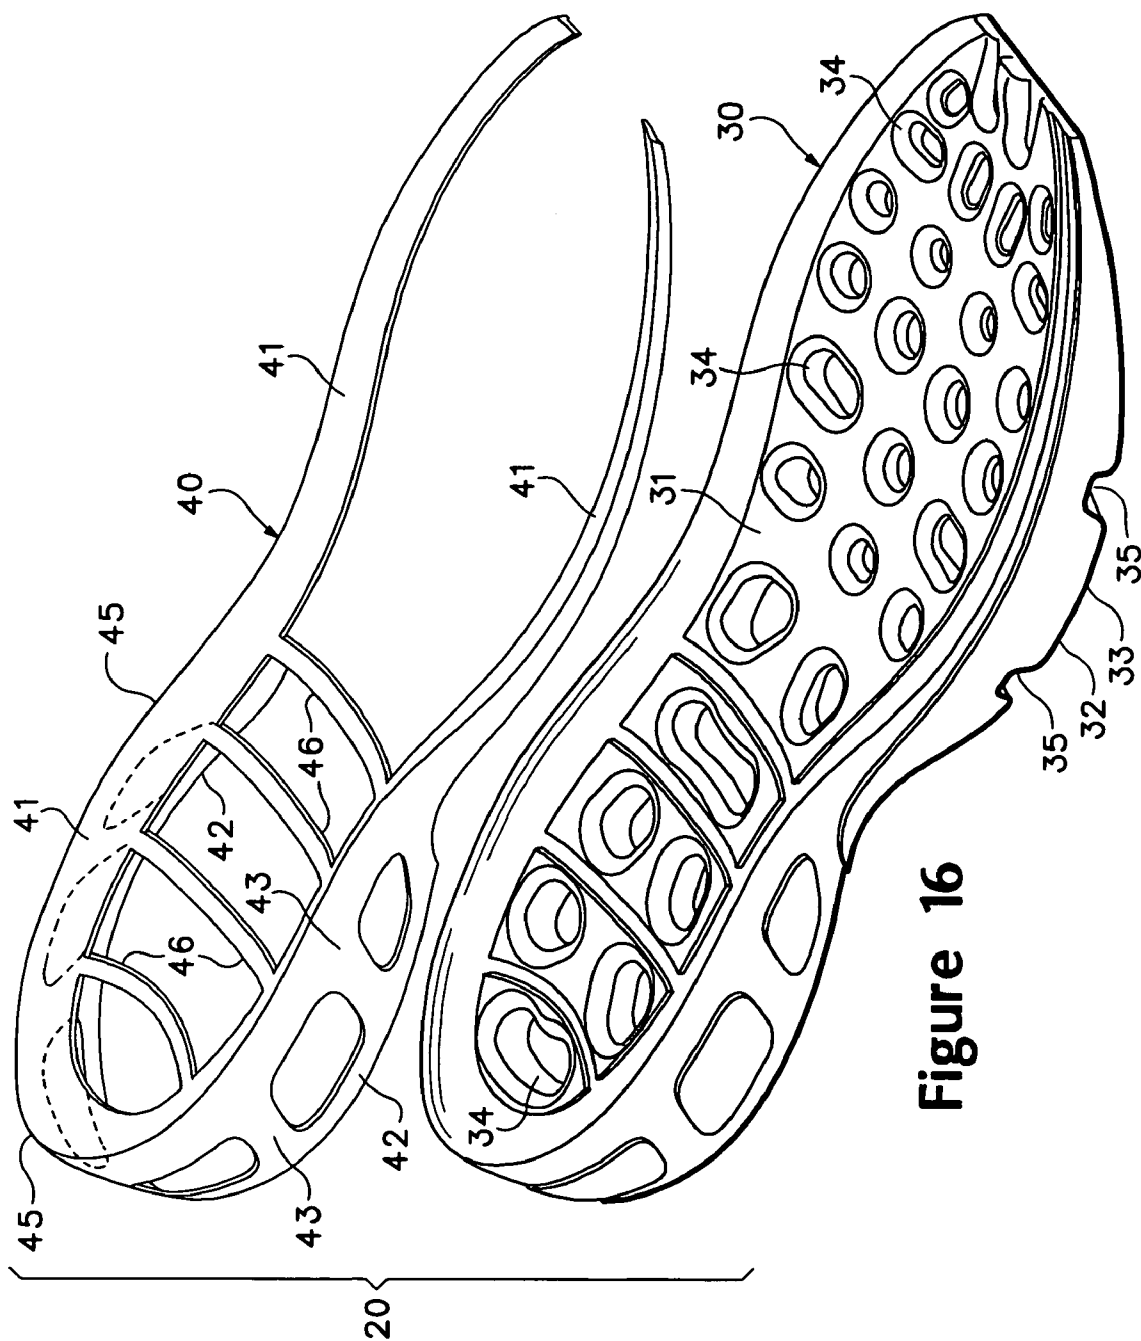
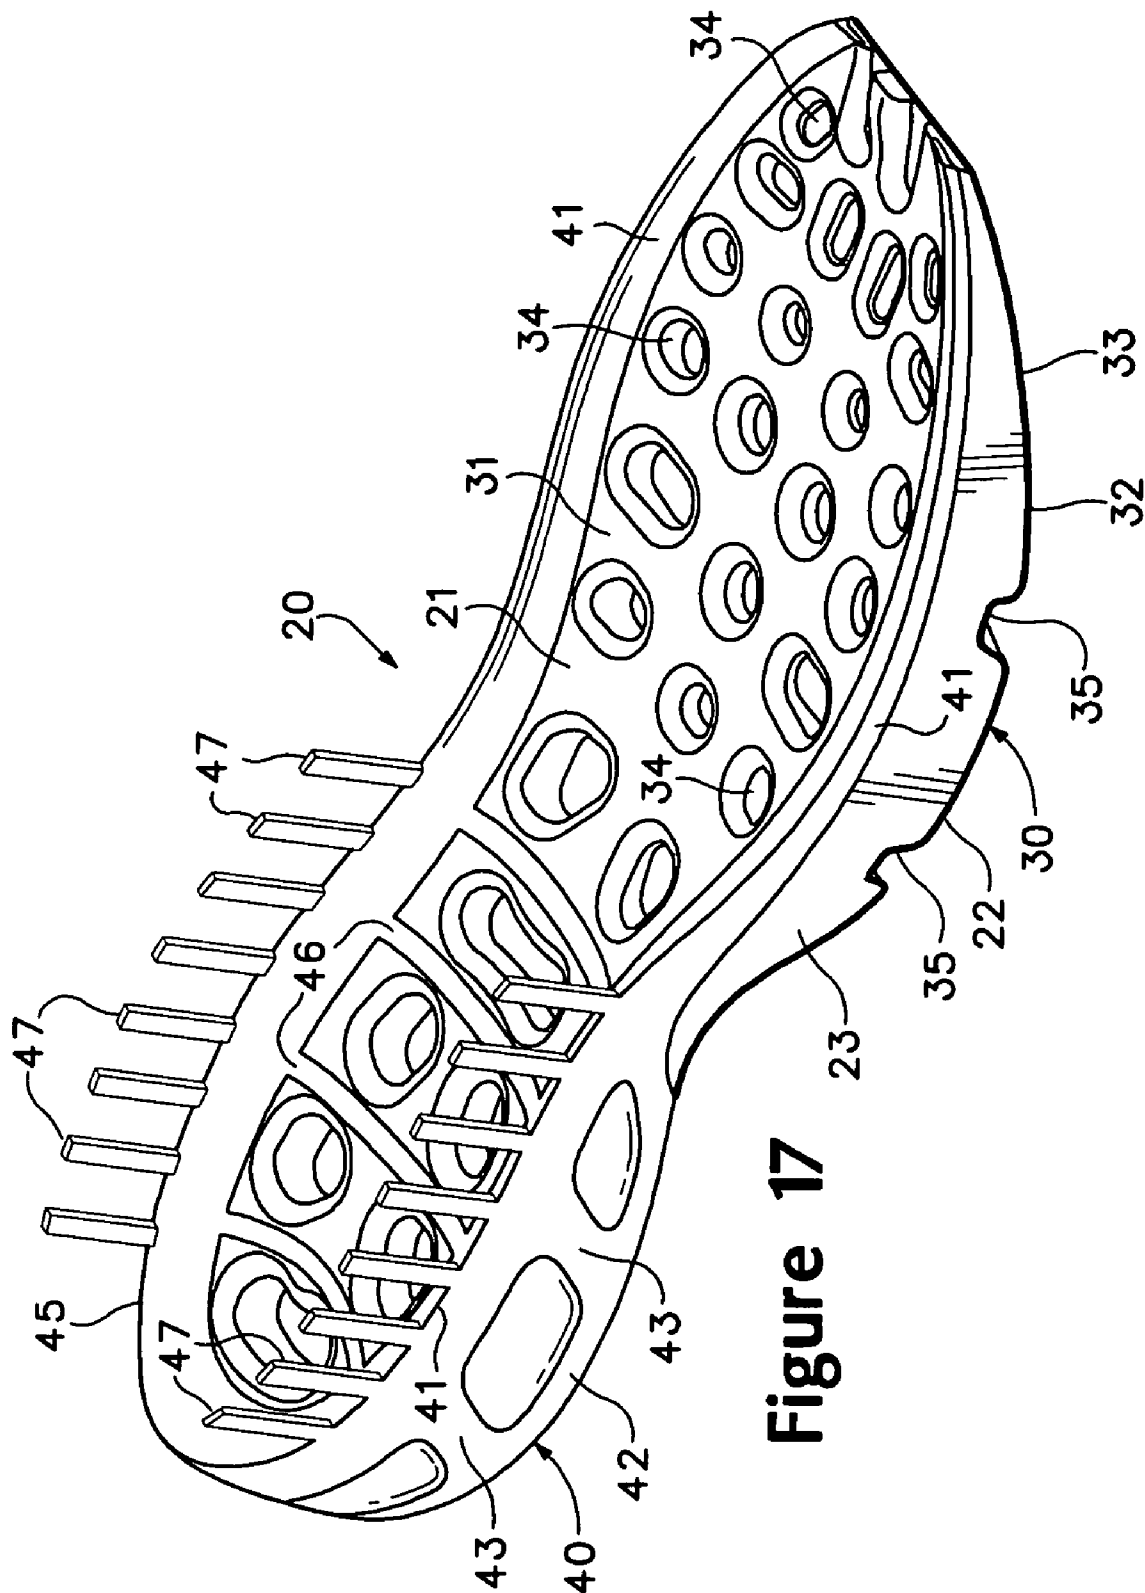


Figure 14E







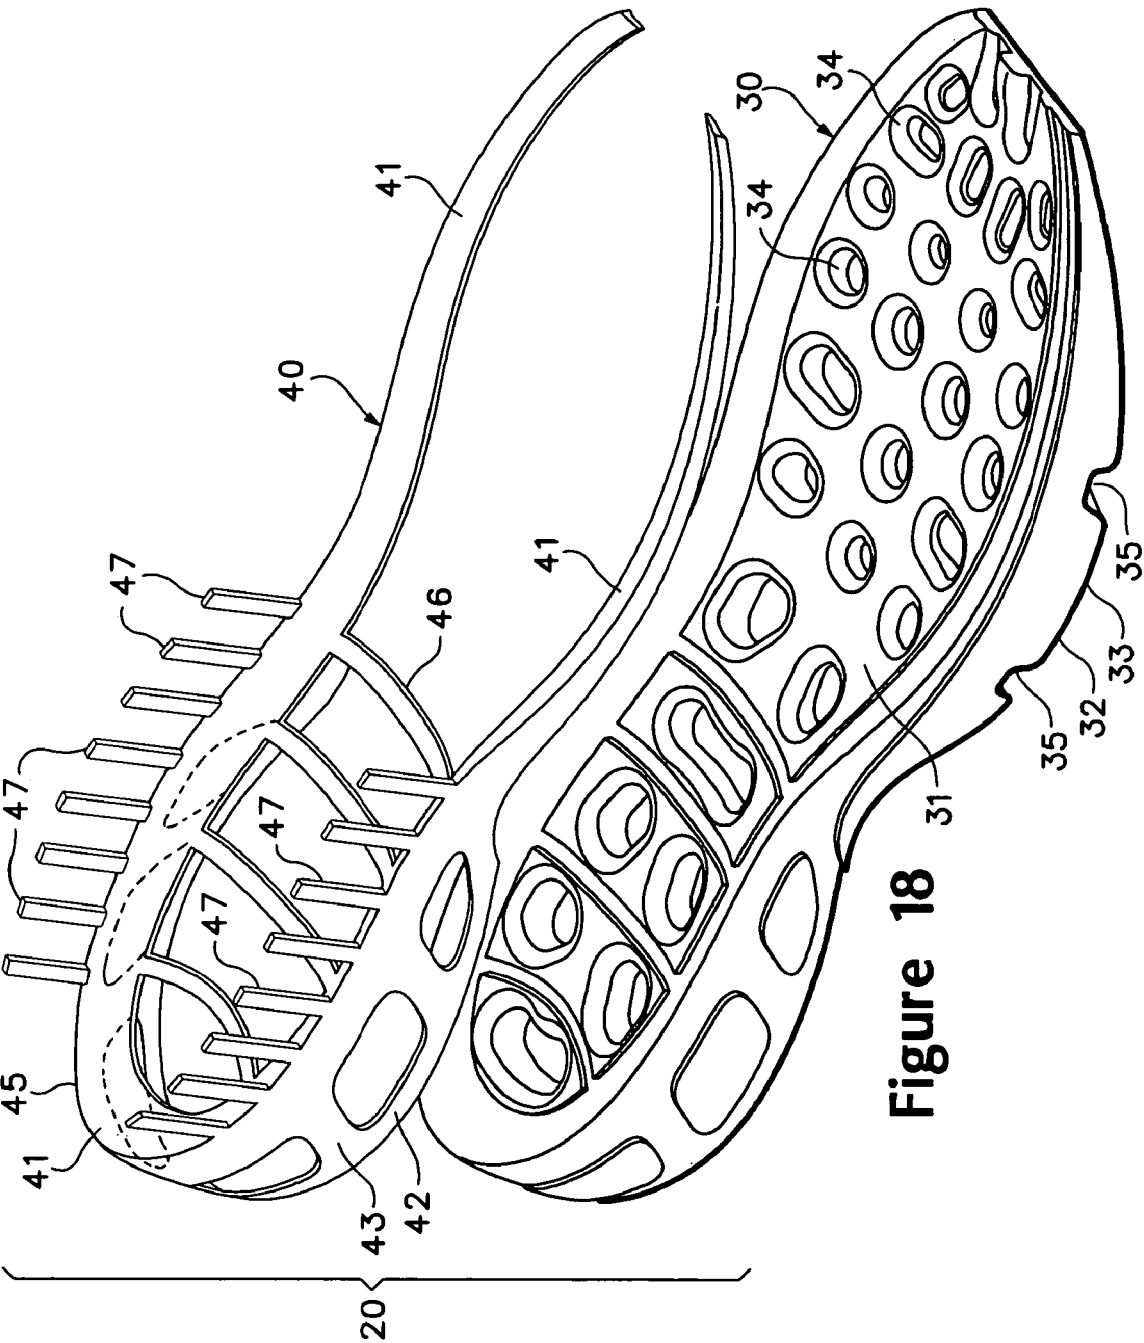
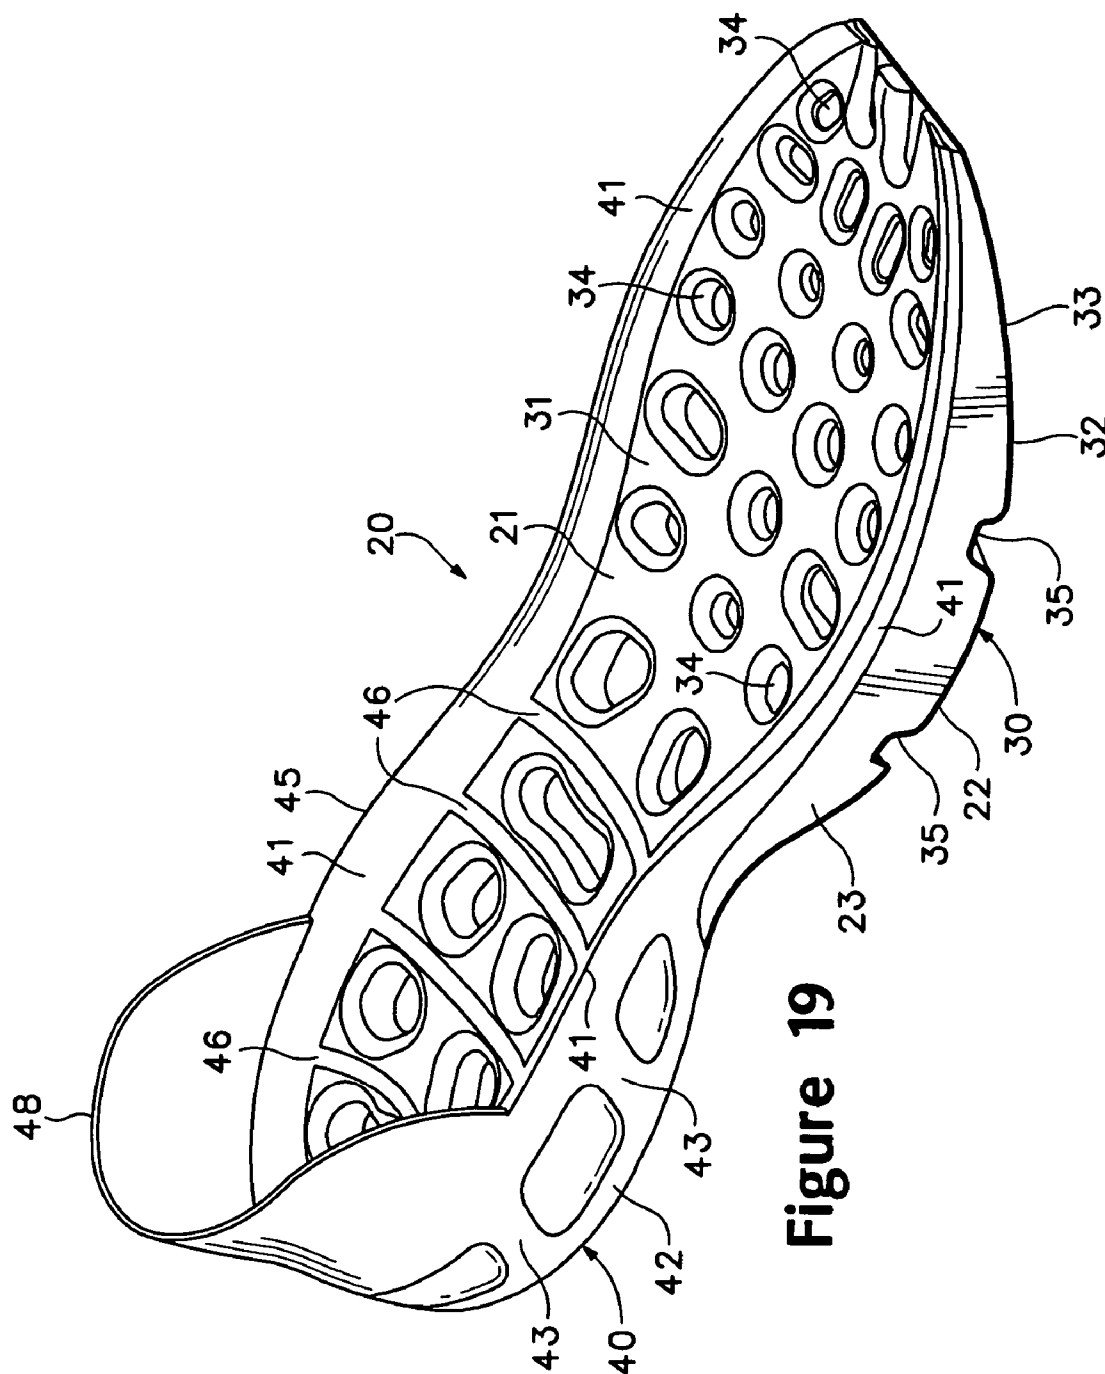


Figure 18



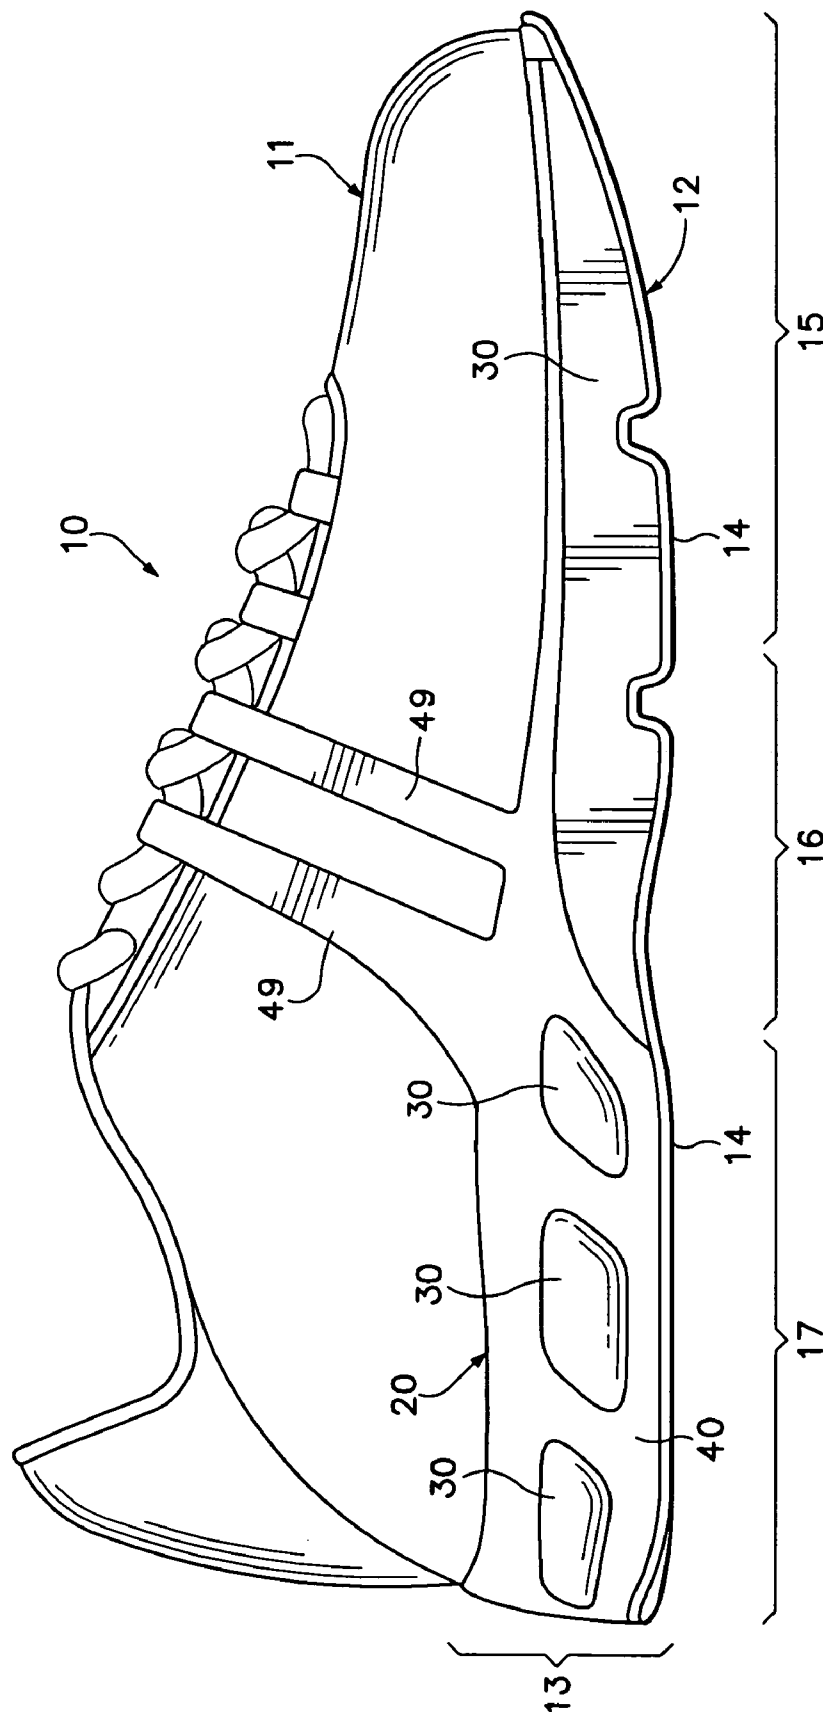


Figure 20

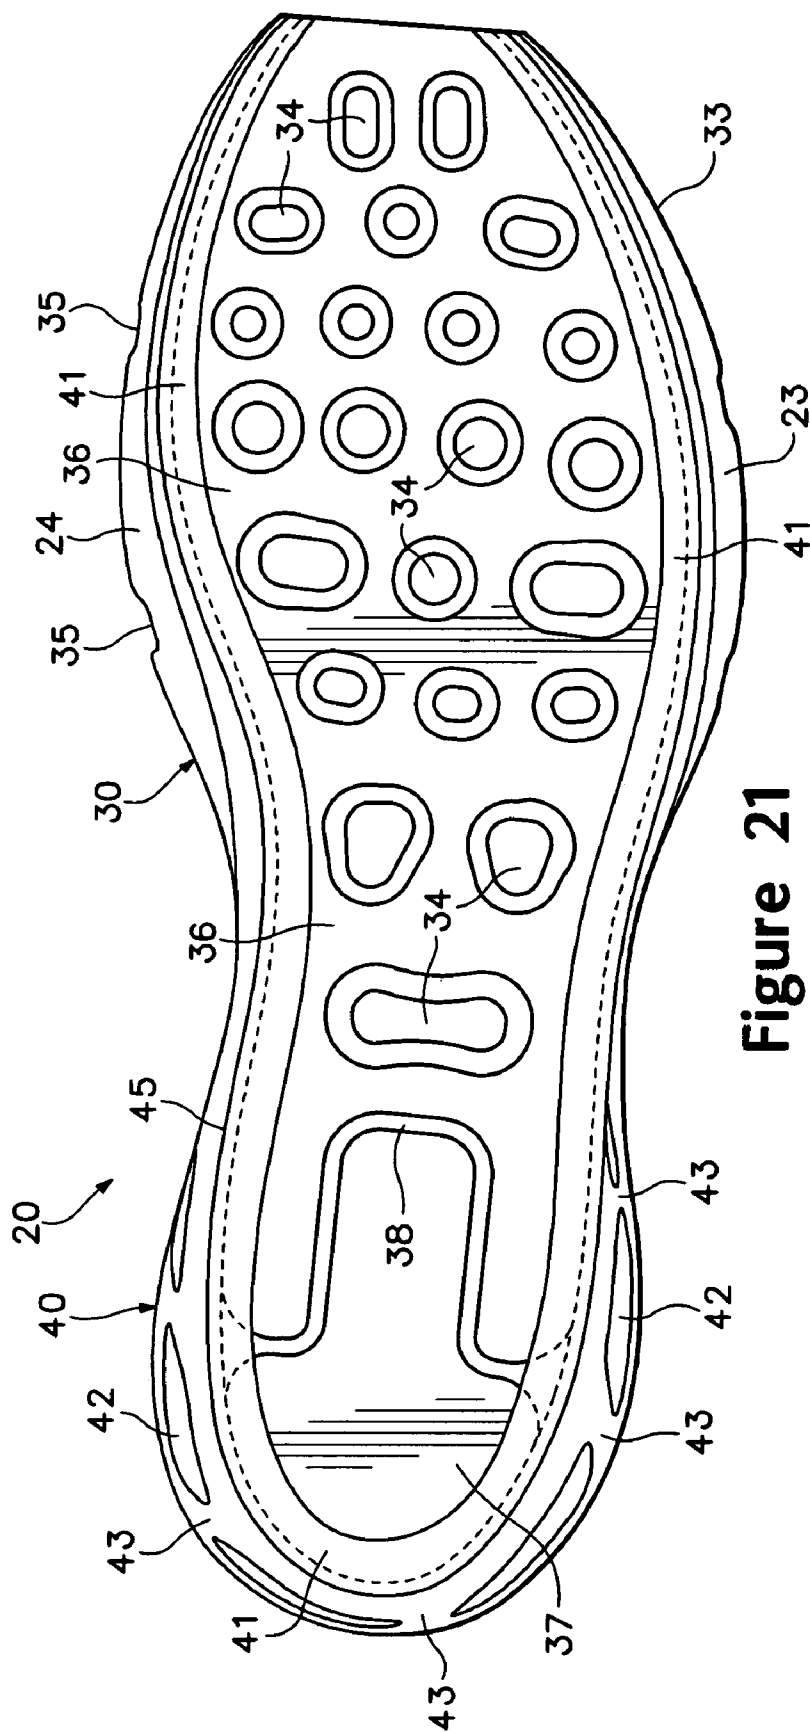
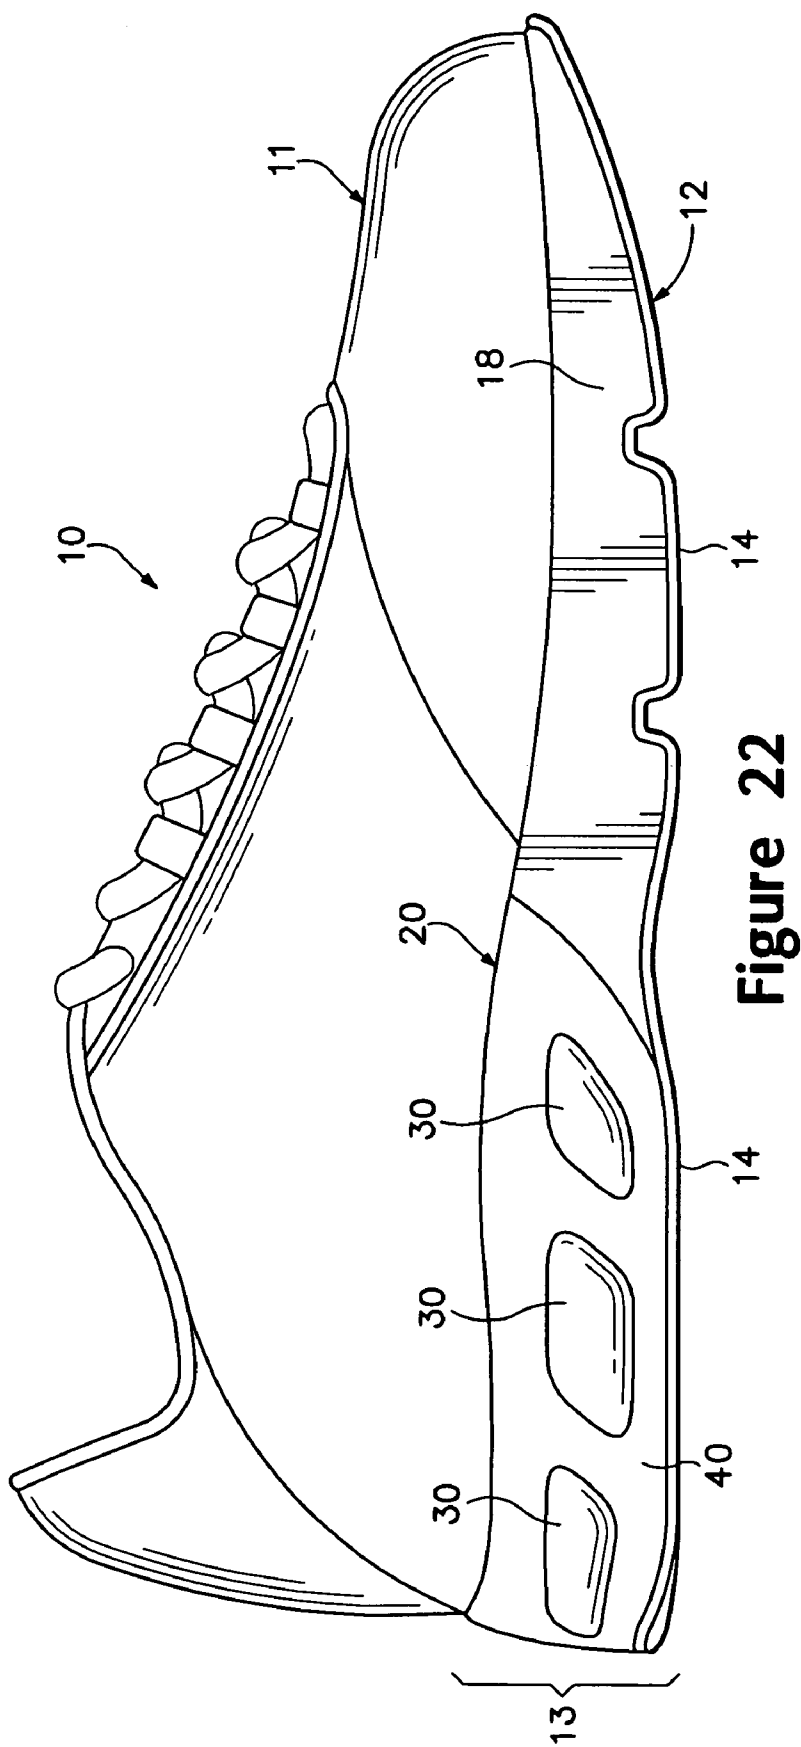


Figure 21



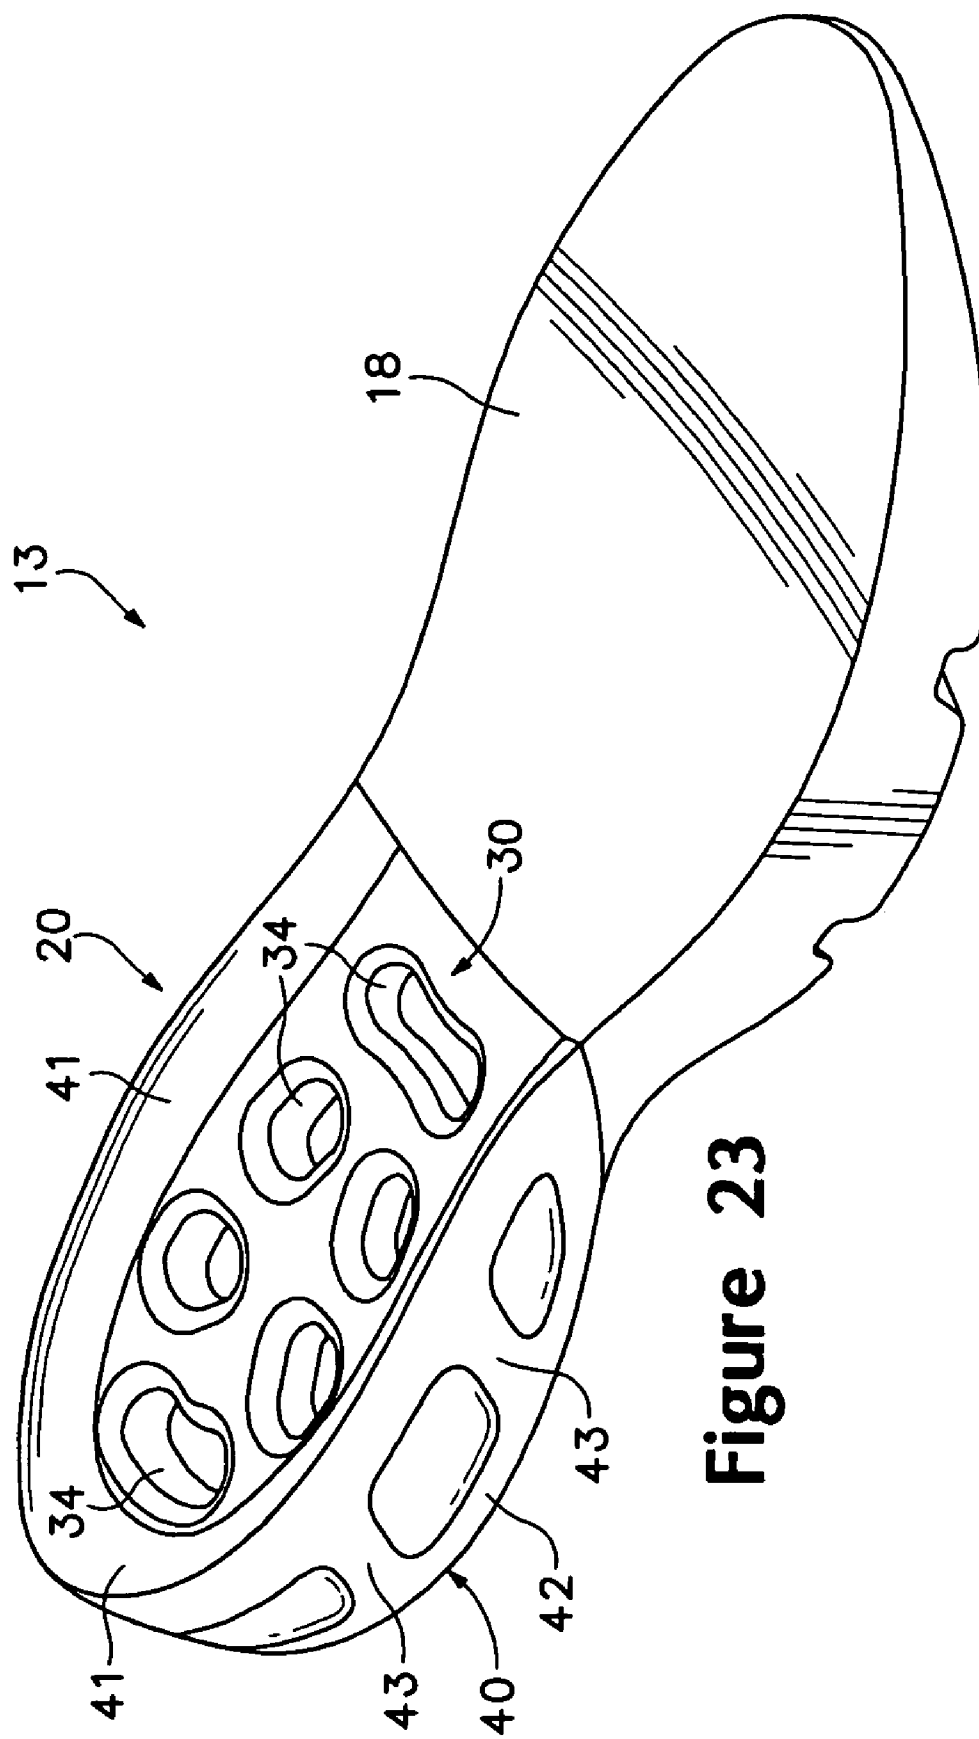


Figure 23

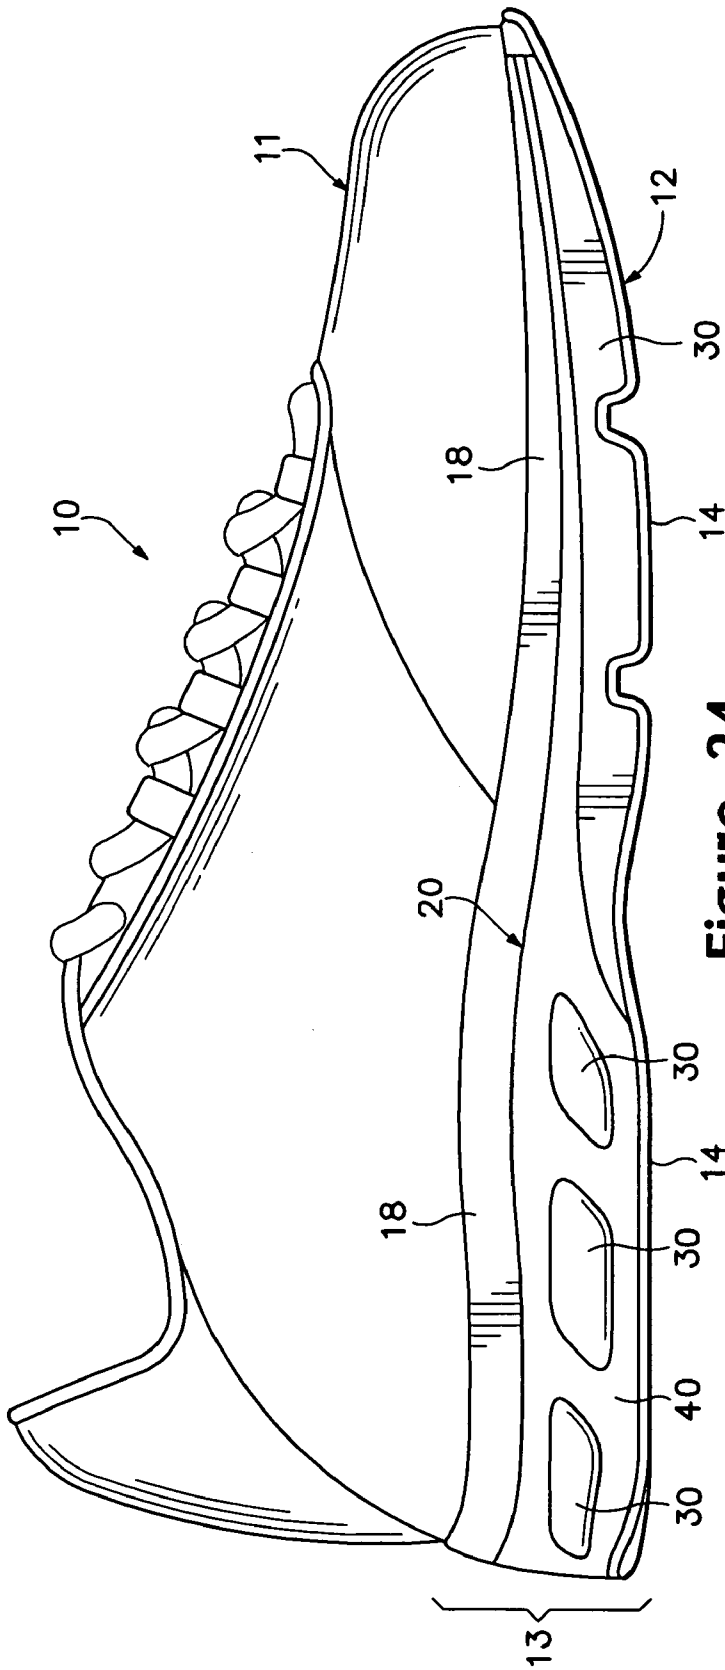


Figure 24

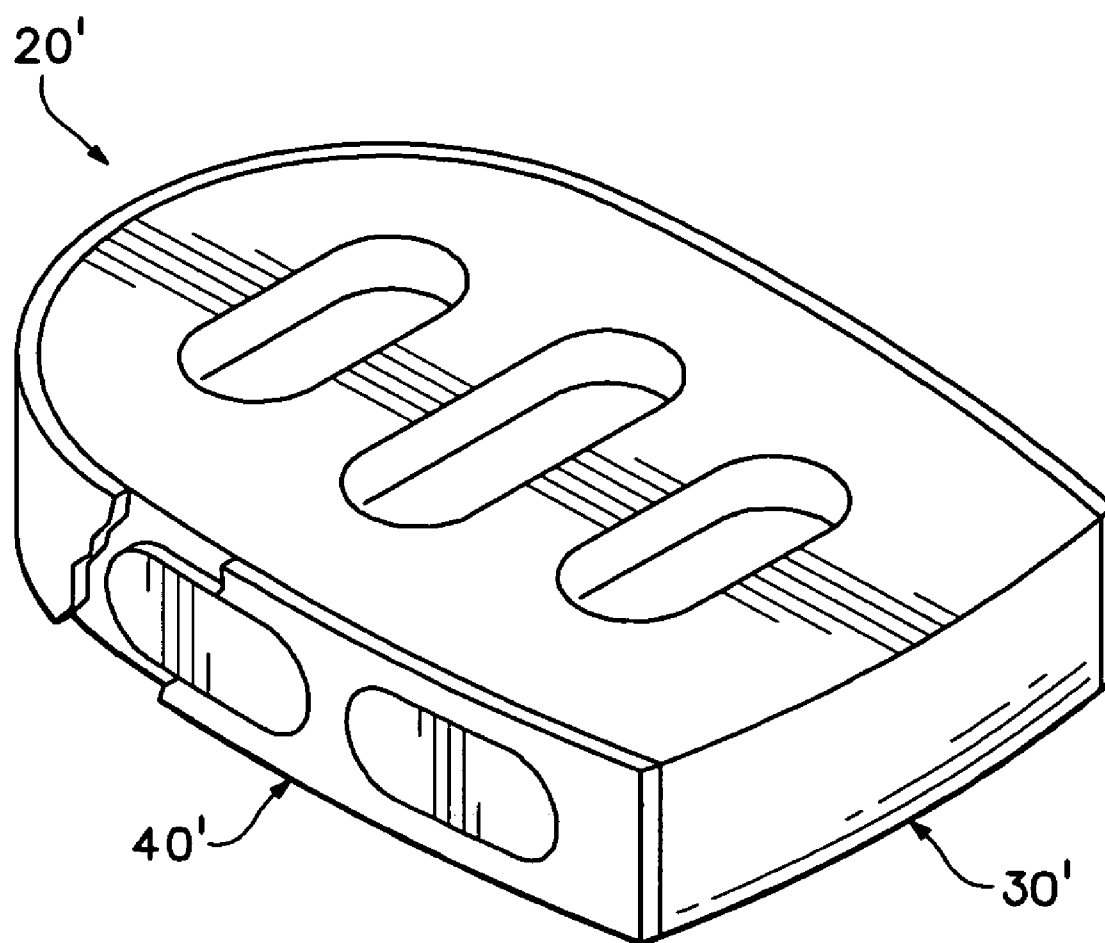


Figure 25

US 7,401,420 B2

1

ARTICLE OF FOOTWEAR HAVING A FLUID-FILLED BLADDER WITH A REINFORCING STRUCTURE

CROSS-REFERENCE TO RELATED APPLICATION

This non-provisional U.S. patent application is a continuation of and claims priority to non-provisional U.S. patent application Ser. No. 10/767,211 now U.S. Pat. No. 7,086,179, which was filed in the U.S. Patent and Trademark Office on Jan. 28, 2004 and entitled Article Of Footwear Having A Fluid-Filled Bladder With A Reinforcing Structure, such U.S. patent application being entirely incorporated herein by reference. U.S. patent application Ser. No. 10/767,211, in turn, claims priority to provisional U.S. patent application Ser. No. 60/531,674, which was filed in the U.S. Patent and Trademark Office on Dec. 23, 2003 and entitled Article Of Footwear Having A Fluid-Filled Bladder With A Reinforcing Structure.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to footwear. The invention concerns, more particularly, a sole component for an article of footwear and a method of manufacturing the sole component. Although the configuration of the sole component may vary significantly within the scope of the present invention, the sole component generally includes a fluid-filled bladder and an external reinforcing structure secured to the bladder.

2. Description of Background Art

A conventional article of athletic footwear includes two primary elements, an upper and a sole structure. The upper provides a covering for the foot that securely receives and positions the foot with respect to the sole structure. In addition, the upper may have a configuration that protects the foot and provides ventilation, thereby cooling the foot and removing perspiration. The sole structure is secured to a lower surface of the upper and is generally positioned between the foot and the ground. In addition to attenuating ground reaction forces and absorbing energy (i.e., imparting cushioning), the sole structure may provide traction and control foot motions, such as over pronation. Accordingly, the upper and the sole structure operate cooperatively to provide a comfortable structure that is suited for a wide variety of ambulatory activities, such as walking and running.

The sole structure of athletic footwear generally exhibits a layered configuration that includes a comfort-enhancing insole, a resilient midsole formed from a polymer foam, and a ground-contacting outsole that provides both abrasion-resistance and traction. Suitable polymer foam materials for the midsole include ethylvinylacetate or polyurethane that compress resiliently under an applied load to attenuate ground reaction forces and absorb energy. Conventional polymer foam materials are resiliently compressible, in part, due to the inclusion of a plurality of open or closed cells that define an inner volume substantially displaced by gas. That is, the polymer foam includes a plurality of bubbles that enclose the gas. Following repeated compressions, the cell structure may deteriorate, thereby resulting in decreased compressibility of the foam. Accordingly, the force attenuation and energy absorption characteristics of the midsole may decrease over the lifespan of the footwear.

One manner of reducing the weight of a polymer foam midsole and decreasing the effects of deterioration following repeated compressions is disclosed in U.S. Pat. No. 4,183,156 to Rudy, hereby incorporated by reference, in which cushion-

2

ing is provided by a fluid-filled bladder formed of an elastomeric materials. The bladder includes a plurality of tubular chambers that extend longitudinally along a length of the sole structure. The chambers are in fluid communication with each other and jointly extend across the width of the footwear. The bladder may be encapsulated in a polymer foam material, as disclosed in U.S. Pat. No. 4,219,945 to Rudy, hereby incorporated by reference. The combination of the bladder and the encapsulating polymer foam material functions as a midsole. Accordingly, the upper is attached to the upper surface of the polymer foam material and an outsole or tread member is affixed to the lower surface.

Bladders of the type discussed above are generally formed of an elastomeric material and are structured to have an upper and lower portions that enclose one or more chambers therebetween. The chambers are pressurized above ambient pressure by inserting a nozzle or needle connected to a fluid pressure source into a fill inlet formed in the bladder. Following pressurization of the chambers, the fill inlet is sealed and the nozzle is removed.

Fluid-filled bladders suitable for footwear applications may be manufactured by a two-film technique, in which two separate sheets of elastomeric film are formed to exhibit the overall peripheral shape of the bladder. The sheets are then bonded together along their respective peripheries to form a sealed structure, and the sheets are also bonded together at predetermined interior areas to give the bladder a desired configuration. That is, the interior bonds provide the bladder with chambers having a predetermined shape and size. Such bladders have also been manufactured by a blow-molding technique, wherein a molten or otherwise softened elastomeric material in the shape of a tube is placed in a mold having the desired overall shape and configuration of the bladder. The mold has an opening at one location through which pressurized air is provided. The pressurized air induces the liquefied elastomeric material to conform to the shape of the inner surfaces of the mold. The elastomeric material then cools, thereby forming a bladder with the desired shape and configuration.

SUMMARY OF THE INVENTION

The present invention is an article of footwear incorporating a sole component that includes a bladder and a reinforcing structure. The bladder is formed of a barrier material, and the bladder encloses a pressurized fluid that exerts an outward force upon the barrier material. The reinforcing structure is at least partially recessed into the barrier material and bonded to the barrier material. At least a portion of the reinforcing structure may be placed in tension by the outward force upon the barrier material. The reinforcing structure may also restrain distension or outwardly-directed swelling of the bladder due to the outward force upon the barrier material, and the reinforcing structure may be formed of a material with a greater modulus of elasticity than the barrier material.

The bladder may include a first surface and an opposite second surface. The first surface may be joined to the second surface by a plurality of interior bonds that are spaced inward from a sidewall of the bladder. In addition, the bladder may include at least one flexion indentation formed in the second surface, the indentation may extend, for example, from a lateral side of the bladder to a medial side of the bladder. As an alternative, the indentation may extend in a generally longitudinal direction. At least one of the interior bonds may join the first surface with the indentation.

The reinforcing structure may include a first portion, a second portion, and a plurality of connecting portions. The

US 7,401,420 B2

3

first portion may be positioned at an interface of the first surface and the sidewall, and the first portion may extend along a lateral side of the bladder, around a heel region of the bladder, and along a medial side of the bladder. The second portion may be spaced from the first portion and positioned at an interface of the second surface and the sidewall. In addition, the second portion may extend along the lateral side, around the heel region, and along a medial side of the bladder. The connecting portions may extend along the sidewall and between the first portion and the second portion, with the connecting portions being recessed into sidewall. The connecting portions may also be inclined with respect to the first portion and the second portion.

Another aspect of the present invention involves a method of manufacturing a sole component for an article of footwear. The method includes the steps of molding a fluid-filled bladder from a polymer material, recessing a reinforcing member into the bladder, and bonding the reinforcing member to the bladder. Accordingly, the reinforcing member may be placed within the mold prior to introducing the polymer material forming the bladder.

The advantages and features of novelty characterizing the present invention are pointed out with particularity in the appended claims. To gain an improved understanding of the advantages and features of novelty, however, reference may be made to the following descriptive matter and accompanying drawings that describe and illustrate various embodiments and concepts related to the invention.

DESCRIPTION OF THE DRAWINGS

The foregoing Summary of the Invention, as well as the following Detailed Description of the Invention, will be better understood when read in conjunction with the accompanying drawings.

FIG. 1 is a lateral side elevational view of an article of footwear having a first sole component in accordance with the present invention.

FIG. 2 is a first perspective view of the first sole component.

FIG. 3 is a second perspective view of the first sole component.

FIG. 4 is a third perspective view of the first sole component.

FIG. 5 is a top plan view of the first sole component.

FIG. 6 is a bottom plan view of the first sole component.

FIG. 7 is a first side elevational view of the first sole component.

FIG. 8 is a second side elevational view of the first sole component.

FIGS. 9A-9E are cross-sectional views of the first sole component, as defined by section lines 9A-9E in FIG. 5.

FIG. 9F is a cross-sectional view of the first sole component, as defined by section line 9F-9F in FIG. 7.

FIG. 9G is a cross-sectional view of the article of footwear, as defined by section line 9G-9G in FIG. 1.

FIG. 10 is a first exploded perspective view of the first sole component.

FIG. 11 is a second exploded perspective view of the first sole component.

FIG. 12A is a top plan view of an upper mold portion of a mold for forming the first sole component.

FIG. 12B is a side elevational view of the upper mold portion.

FIG. 13A is a top plan view of a lower mold portion of the mold.

4

FIG. 13B is a side elevational view of the lower mold portion.

FIGS. 14A-14E depict various manufacturing steps in forming the first sole component.

FIG. 15 is a perspective view of a second sole component in accordance with the present invention.

FIG. 16 is an exploded perspective view of the second sole component.

FIG. 17 is a perspective view of a third sole component in accordance with the present invention.

FIG. 18 is an exploded perspective view of the third sole component.

FIG. 19 is a perspective view of another embodiment of the third sole component.

FIG. 20 is a side elevational view of the footwear depicting yet another embodiment of the third sole component.

FIG. 21 is a top plan view of a fourth sole component.

FIG. 22 is a lateral side elevational view of an article of footwear having a fifth sole component in accordance with the present invention.

FIG. 23 is a perspective view of the fifth sole component.

FIG. 24 is a lateral side elevational view of an article of footwear having a sixth sole component in accordance with the present invention.

FIG. 25 is a perspective view of a seventh sole component in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Introduction

The following discussion and accompanying figures disclose various embodiments of a sole component suitable for footwear applications. In addition, a method of manufacturing the sole component is disclosed. Concepts related to the sole component and manufacturing method are disclosed with reference to footwear having a configuration that is suitable for running. The sole component is not limited solely to footwear designed for running, and may be applied to a wide range of athletic footwear styles, including basketball shoes, cross-training shoes, walking shoes, tennis shoes, soccer shoes, and hiking boots, for example. The sole component may also be applied to footwear styles that are generally considered to be non-athletic, including dress shoes, loafers, sandals, and work boots. The concepts disclosed herein apply, therefore, to a wide variety of footwear styles.

An article of footwear 10, as depicted in FIG. 1, includes an upper 11 and a sole structure 12. Upper 11 may incorporate a plurality material elements (e.g., textiles, foam, and leather) that are stitched or adhesively bonded together to form an interior void for securely and comfortably receiving a foot. The material elements may be selected and located with respect to upper 11 in order to selectively impart properties of durability, air-permeability, wear-resistance, flexibility, and comfort, for example. In addition, upper 11 may include a lace that is utilized in a conventional manner to modify the dimensions of the interior void, thereby securing the foot within the interior void and facilitating entry and removal of the foot from the interior void. The lace may extend through apertures in upper 11, and a tongue portion of upper 11 may extend between the interior void and the lace. Accordingly, upper 11 itself may have a substantially conventional configuration within the scope of the present invention.

Sole structure 12 is secured to upper 11 and includes a midsole 13 and an outsole 14. A conventional midsole is primarily formed of a polymer foam material, such as polyurethane or ethylvinylacetate, as discussed in the Background

US 7,401,420 B2

5

of the Invention section. In contrast with the structure of a conventional midsole, midsole 13 incorporates a sole component 20, as depicted in FIGS. 2-11, that includes a fluid-filled bladder 30 and an external reinforcing structure 40. Sole component 20 provides ground reaction force attenuation and energy absorption (i.e., cushioning) as footwear 10 impacts the ground during running, walking, or other ambulatory activities. In addition, sole component 20 may impart stability or otherwise control foot motions, such as the degree of pronation. Outsole 14 is secured to a lower surface of midsole 13 and is formed of a durable, wear-resistant material suitable for engaging the ground. Sole structure 12 may also include an insole 18 with the configuration of a thin cushioning member. Insole 18 may be positioned within the interior void formed by upper 11 and located to contact a plantar surface of the foot, thereby enhancing the overall comfort of footwear 10.

The following discussion references various general regions of footwear 10, upper 11, and sole structure 12 based upon their relative locations. For reference purposes, footwear 10 may be divided into three general regions: a forefoot region 15, a midfoot region 16, and a heel region 17, as depicted in FIG. 1. Forefoot region 15 generally includes portions of footwear 10 corresponding with the toes and the joints connecting the metatarsals with the phalanges. Midfoot region 16 generally includes portions of footwear 10 corresponding with the arch area of the foot, and heel region 17 corresponds with rear portions of the foot, including the calcaneus bone. Regions 15-17 are not intended to demarcate precise areas of footwear 10. Rather, regions 15-17 are intended to represent general areas of footwear 10 to aid in the following discussion. In addition to footwear 10, regions 15-17 may also be applied to upper 11, sole structure 12, and individual elements thereof.

Sole Component Structure

Sole component 20 includes an upper surface 21 and an opposite lower surface 22. Upper surface 21 is secured to upper 11 in a conventional manner, such as adhesive bonding, and may be contoured to conform with the shape of the plantar surface of the foot. Accordingly, upper surface 21 may exhibit an elevation in heel region 15 that is greater than an elevation in forefoot region 15, with midfoot region 16 forming a transition between the elevations. Differences in the overall thickness of sole component 20 account for the elevation in heel region 15 that is greater than the elevation in forefoot region 15. In general, the thickness of sole component 20 may range, for example, from 0.15 inches in the forward-most portion of forefoot region 15 to approximately 0.70 inches at the interface of forefoot region 15 and midfoot region 16. Similarly, the thickness of sole component 20 may range, for example, from 0.70 inches to approximately 1.20 inches in heel region 17.

The overall shape of sole component 20, as depicted in the plan view of FIGS. 5 and 6, corresponds with the shape of a foot. Accordingly, the width of heel region 17 may be less than a width of forefoot region 15 to accommodate the varying width dimensions of the foot. Outsole 14 is also secured to lower surface 22 in a conventional manner, such as adhesive bonding. In addition to upper surface 21 and lower surface 22, sole component 20 includes a lateral side surface 23 and an opposite medial side surface 24. Both side surfaces 23 and 24 are exposed portions of midsole 13 and have a tapered configuration from heel region 17 to forefoot region 15 that facilitates the difference in elevation between heel region 17 and forefoot region 15.

6

The primary elements of bladder 30 are an upper barrier layer 31 and a lower barrier layer 32 that are substantially impermeable to a pressurized fluid contained by bladder 30. Upper barrier layer 31 and lower barrier layer 32 are bonded together around their respective peripheries to form a peripheral bond 33 and cooperatively form a sealed chamber, in which the pressurized fluid is located. The pressurized fluid contained by bladder 30 induces an outward force upon barrier layers 31 and 32 that tends to separate or otherwise press outward upon barrier layers 31 and 32, thereby distending barrier layers 31 and 32. In order to restrict the degree of outwardly-directed swelling (i.e., distension) of barrier layers 31 and 32 due to the outward force of the pressurized fluid, a plurality of interior bonds 34 are formed between barrier layers 31 and 32. Interior bonds 34 are spaced inward from side surfaces 23 and 24, and interior bonds 34 are distributed throughout sole component 20. In the absence of interior bonds 34, the outward force induced by the pressurized fluid would impart a rounded or otherwise bulging configuration to bladder 30, particularly in areas corresponding with upper surface 21 and lower surface 22. Interior bonds 34, however, restrict the degree of the outwardly-directed swelling or distension of barrier layers 31 and 32 and retain the intended contours of upper surface 21 and lower surface 22.

Interior bonds 34 may exhibit a variety of configurations within the scope of the present invention. In heel region 17, the indentations formed by interior bonds 34 have a greater depth than in forefoot region 15 due to the increased overall thickness of sole component 20 in heel region 17. In addition, the area of each interior bond 34 in heel region 17 is generally greater than the area of each interior bond 34 in forefoot region 15. The position of interior bonds 34 with respect to upper surface 21 and lower surface 22 may also vary. For example, interior bonds 34 may be positioned so as to be closer to upper surface 21, midway between surfaces 21 and 22, or at a position that is closer to lower surface 22.

During running or walking, sole component 20 generally flexes or otherwise bends to accommodate the natural flexing of the foot, particularly in forefoot region 15. In order to facilitate the flexing of sole component 20, a pair of flexion indentations 35 are formed in bladder 30. Each flexion indentation 35 extends laterally across a lower portion of bladder 30. That is, flexion indentations 35 extend between side surfaces 23 and 24, and flexion indentations 35 are formed in lower surface 22. The location of flexion indentations 35 is also selected based upon the average location of the joints between the metatarsals and the proximal phalanges of the foot. More particularly, flexion indentations 35 are spaced such that one flexion indentation 35 is located forward of the joints between the metatarsals and the proximal phalanges and the other flexion indentation 35 is located behind the joints between the metatarsals and the proximal phalanges. The specific locations of flexion indentations 35 may be selected, for example, to be three standard deviations away from the average position of the joints between the metatarsals and the proximal phalanges, as determined through statistical anatomical data. Depending upon the specific configuration and intended use of sole component 20, however, the location of flexion indentations 35 may vary significantly from the positions discussed above.

Flexion indentations 35 extend laterally (i.e., between side surfaces 23 and 24) across lower surface 22. Although this configuration is suitable for footwear structured for running and a variety of other athletic activities, flexion indentations 35 may extend in a generally longitudinal direction (i.e., between forefoot region 15 and heel region 17) in footwear structured for athletic activities such as basketball, tennis, or

US 7,401,420 B2

7

cross-training. Accordingly, flexion indentations **35** may extend in a variety of directions in order to provide a defined line of flexion in sole component **20**. The figures also depict flexion indentations **35** as extending entirely across bladder **30**. In some embodiments, however, flexion indentations **35** may extend only partially across a portion of bladder **30**.

Flexion indentations **35** define portions of sole component **20** that have a reduced thickness. Given that the degree of force necessary to bend an object is generally dependent upon the thickness of the object, the reduced thickness of sole component **20** in the areas of flexion indentations **35** facilitates flexing. In addition, portions of outsole **14** may extend into flexion indentations **35**, thereby forming a stiffer, less compressible areas of sole structure **12** that also facilitate flexing about flexion indentations **35**.

Flexion indentations **35** form an indentation in lower surface **22** that corresponds with the locations of various interior bonds **34**. Referring to FIG. 9D, a cross-section through one of flexion indentations **35** is depicted. With respect to this area, interior bonds **34** extend downward to bond upper barrier layer **31** with the portion of lower barrier layer **32** that defines the flexion indentation **35**. Some prior art bladders incorporate bonds that form flexion points, and the flexion points may form relatively hard areas due to the lack of a fluid cushion in the area of the flexion points. That is, the flexion points generally form non-cushioning areas of the prior art bladders. In contrast with the prior art flexion points, flexion indentations **35** form a fluid-filled portion of bladder **30** in areas between the connection of interior bonds **34** to flexion indentations **35**. In other words, a space is formed between flexion indentations **35** and upper barrier layer **31** that includes the fluid such that flexion indentations **35** provide an advantage of simultaneously accommodating flexing and providing cushioning. As an alternative, no interior bonds **34** may be formed in areas that define flexion indentations **35**.

A variety of thermoplastic polymer materials may be utilized for bladder **30**, and particularly barrier layers **31** and **32**, including polyurethane, polyester, polyester polyurethane, and polyether polyurethane. Another suitable material for bladder **30** is a film formed from alternating layers of thermoplastic polyurethane and ethylene-vinyl alcohol copolymer, as disclosed in U.S. Pat. Nos. 5,713,141 and 5,952,065 to Mitchell et al, hereby incorporated by reference. A variation upon this material wherein the center layer is formed of ethylene-vinyl alcohol copolymer; the two layers adjacent to the center layer are formed of thermoplastic polyurethane; and the outer layers are formed of a regrind material of thermoplastic polyurethane and ethylene-vinyl alcohol copolymer may also be utilized. Bladder **30** may also be formed from a flexible microlayer membrane that includes alternating layers of a gas barrier material and an elastomeric material, as disclosed in U.S. Pat. Nos. 6,082,025 and 6,127,026 to Bonk et al., both hereby incorporated by reference. In addition, numerous thermoplastic urethanes may be utilized, such as PELLETHANE, a product of the Dow Chemical Company; ELASTOLLAN, a product of the BASF Corporation; and ESTANE, a product of the B.F. Goodrich Company, all of which are either ester or ether based. Still other thermoplastic urethanes based on polyesters, polyethers, polycaprolactone, and polycarbonate macrogels may be employed, and various nitrogen blocking materials may also be utilized. Additional suitable materials are disclosed in U.S. Pat. Nos. 4,183,156 and 4,219,945 to Rudy, hereby incorporated by reference. Further suitable materials include thermoplastic films containing a crystalline material, as disclosed in U.S. Pat. Nos. 4,936,029 and 5,042,176 to Rudy, hereby incorporated by reference, and polyurethane including a polyester polyol, as

8

disclosed in U.S. Pat. Nos. 6,013,340; 6,203,868; and 6,321,465 to Bonk et al., also hereby incorporated by reference.

The fluid within bladder **30** may be any of the gasses disclosed in U.S. Pat. No. 4,340,626 to Rudy, hereby incorporated by reference, such as hexafluoroethane and sulfur hexafluoride, for example. The fluid may also include gasses such as pressurized octafluoropropane, nitrogen, or air. In addition to gasses, various gels or liquids may be sealed within bladder **30**. Accordingly, a variety of fluids are suitable for bladder **30**. With regard to pressure, a suitable fluid pressure is fifteen pounds per square inch, but may range from zero to thirty pounds per square inch. Accordingly, the fluid pressure within bladder **30** may be relatively high, or the fluid pressure may be at ambient pressure or at a pressure that is slightly elevated from ambient in some embodiments of the invention.

Reinforcing structure **40** forms a reinforcing cage that is bonded or otherwise secured to an exterior of bladder **30**. In general, reinforcing structure **40** generally extends around portions of the periphery of bladder **30**, and portions of reinforcing structure **40** extend along side surfaces **23** and **24** of sole component **20**. Reinforcing structure **40** extends, therefore, between upper surface **21** and lower surface **22**. In addition, the material forming reinforcing structure **40** exhibits a greater modulus of elasticity than the material forming bladder **30**. Accordingly, the configuration and material properties of reinforcing structure **40** may impart reinforcement to sole component **20**.

Interior bonds **34**, as discussed above, are spaced inward from side surfaces **23** and **24** to restrict the degree of outwardly-directed swelling (i.e., distension) of barrier layers **31** and **32**, particularly in areas corresponding with upper surface **21** and lower surface **22**. Interior bonds **34** may not, however, significantly restrict the outwardly-directed swelling of side surfaces **23** and **24**. One purpose of reinforcing structure **40** is, therefore, to restrict the degree of outwardly-directed swelling in side surfaces **23** and **24**, thereby retaining the intended overall shape of sole component **20**.

Reinforcing structure **40** includes an upper portion **41**, a lower portion **42**, and a plurality of connecting portions **43**. Upper portion **41** exhibits a generally U-shaped configuration and is positioned at the interface of upper surface **21** and side surfaces **23** and **24**. Accordingly, upper portion **41** extends along lateral side **23** from forefoot region **15** to heel region **17**, extends around heel region **17**, and also extends along medial side **24** from forefoot region **15** to heel region **17**. Lower portion **42** also exhibits a generally U-shaped configuration and is positioned at the interface of lower surface **22** and side surfaces **23** and **24**. Whereas upper portion **41** extends over portions of both upper surface **21** and side surfaces **23** and **24**, lower portion **42** extends over side surfaces **23** and **24**. That is, lower portion **42** covers areas of side surfaces **23** and **24** that are adjacent to lower surface **22**, but lower portion **42** does not generally extend over lower surface **22**. Lower portion **42** extends through heel region **17** and may extend into midfoot region **16**. As depicted in the figures, however, lower portion **42** does not extend into forefoot region **15**. Connecting portions **43** extend along side surfaces **23** and **24** and also extend between upper portion **41** and lower portion **42**. Connecting portions **43** extend in a diagonal direction between upper portion **41** and lower portion **42**. More particularly, connecting portions **43** exhibit a forwardly-inclined configuration, but may also be substantially vertical or rearwardly-inclined.

Upper portion **41**, lower portion **42**, and connecting portions **43** collectively form a plurality of apertures that expose portions of bladder **30**. The apertures extend along side surfaces **23** and **24** in at least heel region **17**, and the shape of the

US 7,401,420 B2

9

apertures generally depends upon the orientations of connecting portions 43 and the configurations of upper portion 41 and lower portion 42. The apertures formed through reinforcing structure 40 have a variety of shapes that include, for example, a parallelogram, oval, hexagon, triangle, circle, or various non-geometric shapes. The shape of the apertures may affect the compression characteristics of reinforcing structure 40 and may be selected, therefore, to provide particular properties to reinforcing structure 40.

Reinforcing structure 40 restricts the degree of outwardly-directed swelling in side surfaces 23 and 24, thereby retaining the intended overall shape of sole component 20. That is, the pressurized fluid within bladder 30 presses outward upon barrier layers 31 and 32, and reinforcing structure 40 restrains the distension in side surfaces 23 due to the fluid. Portions of reinforcing structure 40 are, therefore, placed in tension by the pressurized fluid. Although upper portion 41 and lower portion 42 may experience such tension, connecting portions 43, which extend along side surfaces 23 and 24, may generally experience greater degrees of tension. Accordingly, connecting portions 43 are placed in tension by the fluid pressure and operate to restrict the degree of outwardly-directed swelling or distension in side surfaces 23 and 24.

The specific configuration of reinforcing structure 40 discussed above is intended to provide an understanding of reinforcing structure 40 according to one embodiment of the invention, and as depicted in FIGS. 2-11. In further embodiments of the invention, however, the configuration of reinforcing structure 40 may be significantly modified. For example, upper portion 41 may be limited to heel region 17 and midfoot region 16, upper portion 41 may extend only over portions upper surface 21, or upper portion 41 may extend only over portions of side surface 23 and 24. Similarly, lower portion 42 may extend through each of regions 15-17, or lower portion 42 may extend over portions of lower surface 22. Connecting portions 43 may also exhibit a configuration that extends along side surfaces 23 and 24 in midfoot region 16 and forefoot region 15, and the numbers and dimensions of connecting portions 43 may vary significantly. Accordingly, reinforcing structure 40 may have a variety of configurations within the scope of the present invention.

Reinforcing structure 40 is recessed into bladder 30 such that an outward-facing surface of reinforcing structure 40 is generally flush with surfaces 21-24 of bladder 30. Referring to FIG. 9F, a cross-sectional view through a portion of sole component 20 is depicted. The outward-facing surface of connecting portion 43, as depicted in the cross-sectional view, is generally flush with lateral side surface 23. Accordingly, lateral side surface 23 forms a recess that receives connecting portion 43. That is, lateral side surface 23 curves into bladder 30 so as to form a depression in which connecting portion 43 is positioned. In this manner, the various outward-facing surfaces of reinforcing structure 40 are generally flush with surfaces 21-24 of bladder 30. Forming the various outward-facing surfaces of reinforcing structure 40 to be generally flush with surfaces 21-24 of bladder 30 has an advantage of providing a smooth exterior configuration to sole component 20. In some embodiments of the invention, however, the outward-facing surfaces of reinforcing structure 40 may be inset or recessed into bladder 30 or may protrude outward beyond bladder 30.

The various recesses that receive reinforcing structure 40 are depicted in the exploded view of FIG. 10. More particularly, bladder 30 defines a first recess 51, a second recess 52, and a plurality of third recesses 53. First recess 51 corresponds with the location of upper portion 41 and extends, therefore, around the perimeter of upper surface 21. Portions

10

of first recess 51 also extend along side surfaces 23 and 24 at the interface of upper surface 21 and side surfaces 23 and 24. Second recess 52 corresponds with the location of lower portion 42 and is, therefore, positioned adjacent to peripheral bond 33 in heel region 17 and portions of midfoot region 16. In addition, the plurality of third recesses 51 extend between first recess 51 and second recess 52 to correspond with the locations of connecting portions 43.

An injection-molding process or compression-molding process, for example, may be utilized to form reinforcing structure 40 from a diverse range of materials. Suitable materials for reinforcing structure 40 include polyester, thermoset urethane, thermoplastic urethane, various nylon formulations, blends of these materials, or blends that include glass fibers. In addition, reinforcing structure 40 may be formed from a high flex modulus polyether block amide, such as PEBAX, which is manufactured by the Atofina Company. Polyether block amide provides a variety of characteristics that benefit the present invention, including high impact resistance at low temperatures, few property variations in the temperature range of minus 40 degrees Celsius to positive 80 degrees Celsius, resistance to degradation by a variety of chemicals, and low hysteresis during alternative flexure. Another suitable material for reinforcing structure 40 is a polybutylene terephthalate, such as HYTREL, which is manufactured by E.I. duPont de Nemours and Company. Composite materials may also be formed by incorporating glass fibers or carbon fibers into the polymer materials discussed above in order to enhance the strength of reinforcing structure 40. As discussed above, the material forming reinforcing structure 40 exhibits a greater modulus of elasticity than the material forming bladder 30. Whereas the material forming bladder 30 is generally flexible, the material forming reinforcing structure 40 may exhibit semi-rigid or rigid properties.

Although reinforcing structure 40 may be formed from a single material, two or more materials may be incorporated into reinforcing structure 40 in some embodiments of the invention. For example, upper portion 41 may be formed from a material that exhibits lesser stiffness than a material forming lower portion 42 and connecting portions 43. This configuration provides a softer material adjacent to upper 11, which may enhance the comfort of footwear 10 and promote bonding between sole structure 12 and upper 11. Portions of reinforcing structure 40 corresponding with lateral side surface 23 may also be formed with lesser stiffness than the portions of reinforcing structure 40 corresponding with medial side surface 24. In addition, some embodiments may vary the materials throughout reinforcing structure 40 in order to provide specific compression, stability, and flexibility properties to particular portions of reinforcing structure 40.

Sole component 20, as described above, provides ground reaction force attenuation and energy absorption (i.e., cushioning) as footwear 10 impacts the ground during running, walking, or other ambulatory activities. In addition, sole component 20 may impart stability or otherwise control foot motions, such as the degree of pronation. The degree of cushioning provided by sole component 20, and the manner in which sole component 20 controls foot motions, are primarily determined by the configuration of both bladder 30 and reinforcing structure 40 and the properties of the materials forming bladder 30 and reinforcing structure 40. Accordingly, variations in the configuration of both bladder 30 and reinforcing structure 40, and the materials utilized therein, may be employed to tune or otherwise control the cushioning and motion control properties of sole structure 12. The manner in which sole component 20 may be configured to control the

US 7,401,420 B2

11

cushioning and motion control properties of footwear **10** will be discussed in greater detail in the following material.

Lower surface **22** forms an upwardly-beveled area **25** in a rear-lateral portion of sole component **20** in order to permit the footwear to smoothly roll both forward and to the medial side following heel strike. As depicted in FIGS. **1**, **6**, and **7**, the vertical thicknesses of the portions of bladder **30** and reinforcing structure **40** forming lateral side surface **23** decrease in rear portions of heel region **17**. The rationale for the decreased thickness, which forms beveled area **25**, corresponds with the typical motion of the foot during running, which proceeds as follows: Initially, the heel strikes the ground, followed by the ball of the foot. As the heel leaves the ground, the foot rolls forward so that the toes make contact, and finally the entire foot leaves the ground to begin another cycle. During the time that the foot is in contact with the ground and rolling forward, it also rolls from the outside or lateral side to the inside or medial side, a process called pronation. While the foot is air-borne and preparing for another cycle, the opposite process, called supination, occurs.

An advantage of beveled area **25** is to permit footwear **10** to smoothly transition from the position at heel strike, wherein only the rear-lateral portion of sole structure **12** is in contact with the ground, to the position where a substantial portion of outsole **14** is in contact with the ground. That is, beveled area **25** permits footwear **10** to smoothly roll both forward and to the medial side following heel strike. As with bladder **30**, the thickness of reinforcing structure **40** is also reduced to form beveled area **25**. Furthermore, the positions of connecting portions **43** are selected such that a space is formed between two adjacent connecting portions **43** at the location of beveled area **25**. The space between adjacent connecting portions **43** further facilitates a smooth transition from the position at heel strike by providing greater compressibility to sole component **20** at the position of beveled area **25**.

The compressibility of specific areas of sole component **20** affects the cushioning and motion control properties of sole component **20**. In general, forming sole component **20** such that peripheral areas (i.e., the areas adjacent to side surfaces **23** and **24**) are less compressible than interior areas enhances the stability of sole component **20**. One manner in which peripheral compressibility is decreased in sole component **20** is through reinforcing structure **40**. The position of reinforcing structure **40** around the periphery of sole component **20**, coupled with the semi-rigid, less flexible properties of the material forming reinforcing structure **40**, operates to decrease the compressibility of the periphery, thereby enhancing stability.

The distribution and configurations of the various interior bonds **34** also affects the compressibility and flexibility of sole component **20**. In general, interior bonds **34** are spaced inward from side surfaces **23** and **24**, and interior bonds **34** are spaced from each other. Interior bonds **34** form indentations in bladder **30**. Whereas surfaces **21** and **22** are generally horizontal, the material forming barrier layers **31** and **32** extend in a generally vertical direction to form the indentations of interior bonds **34**. During compression of sole component **20**, the vertically-extending material forming interior bonds **34** also compresses, bends, or otherwise deforms, thereby decreasing the compressibility of sole component **20** in areas immediately adjacent to interior bonds **34**. That is, the presence of an interior bond **34** decreases the compressibility of sole component **20** in the area immediately adjacent to the interior bond **34**.

Pronation, which is the rolling of the foot from the outside or lateral side to the inside or medial side, is a natural motion of the foot during running. Some individuals, however,

12

pronate to a degree that is generally considered to be undesirable and sole component **20** may be configured, therefore, to limit the degree of pronation. As discussed above, interior bonds **34** decrease the compressibility of sole component **20** in specific areas. By positioning a greater number, for example, of interior bonds **34** on the medial side of sole component **20**, the compressibility of the medial side may be decreased. As the foot rolls from the lateral side to the medial side, the increased compressibility may operate to limit the degree of pronation in the foot. Accordingly, the distribution of interior bonds **34** may be selected to control foot motions, such as pronation.

The cushioning and motion control properties of sole component **20** may also be affected by the configuration of reinforcing structure **40**. The dimensions of upper portion **41**, lower portion **42**, and connecting portions **43** may be selected to provide specific degrees of flexibility and compressibility to portions of reinforcing structure **40**. For example, the compressibility of peripheral areas of sole component **20** may be selected through modifications in the overall thickness of upper portion **41**. Similarly, the compressibility of heel region **17** may be selected through modifications in the dimensions or number of connecting portions **43**. The thickness of reinforcing structure **40** may also be tapered between upper portion **41** and lower portion **42** in order to control the compressibility of reinforcing structure **40** or limit the degree to which reinforcing structure creases or buckles during compression. In addition, a central area of connecting portions **43** may be thicker than upper or lower portions in order to impart a specific compressibility, for example. In some embodiments of the invention, reinforcing structure **40** may be formed from two or more materials. As discussed above, structuring sole component **20** to exhibit lesser medial compressibility may reduce the degree of pronation in the foot. Accordingly, the material selected for a lateral side of reinforcing structure **40** may have a lesser modulus of elasticity than the material selected for a medial side of reinforcing structure **40**, thereby decreasing the compressibility of the medial side.

Manufacturing Process

One suitable manufacturing process for sole component **20** utilizes a mold **100**, as depicted in FIGS. **12A-13B**. Mold **100** includes an upper mold portion **110** and a corresponding lower mold portion **120**. When joined together, mold portions **110** and **120** form a cavity having dimensions substantially equal to the exterior dimensions of sole component **20**. Mold **100** may be utilized for thermoforming bladder **30** and simultaneously bonding or otherwise securing reinforcing structure **40** to the exterior of bladder **30**. In general, reinforcing structure **40** is placed within upper mold portion **110** and two thermoplastic polymer sheets are placed between mold portions **110** and **120**. The thermoplastic sheets are then drawn into the contours of mold **100** such that at least one of the thermoplastic sheets contacts and is bonded to reinforcing structure **40**. In addition, mold portions **110** and **120** compress the thermoplastic sheets together to form peripheral bond **33**. Once the thermoplastic sheets have conformed to the shape of bladder **30**, reinforcing structure **40** is bonded to the thermoplastic sheets, peripheral bond **33** is formed, and bladder **30** may be pressurized with a fluid and sealed, thereby forming sole component **20**.

Upper mold portion **110** is depicted individually in FIGS. **12A** and **12B** and includes a cavity **111** that forms the portions of sole component **20** corresponding with upper surface **21** and side surfaces **23** and **24**. A ridge **112** extends around cavity **111** and is partially responsible for forming peripheral bond **33**. In addition, a plurality of protrusions **113** extend

US 7,401,420 B2

13

from a surface of cavity 111 and are partially responsible for forming interior bonds 34. Accordingly, the area of upper mold portion 110 located within the area bounded by ridge 112 forms upper surface 21 and side surfaces 23 and 24. An extension of ridge 112 extends outward from cavity 111 and forms an L-shaped channel 114. As discussed in greater detail below, channel 114 is utilized to form a conduit through which a fluid may be injected into sole component 20. Another feature of upper mold portion 110 is a plurality of slot vents 115 distributed throughout cavity 111. Vents 115 provide outlets for air as a thermoplastic sheet of polymer material is drawn into the contours of upper mold portion 110 during the formation of sole component 20.

Lower mold portion 120 is depicted individually in FIGS. 13A and 13B and includes a surface 121 that forms the portion of sole component 20 corresponding with lower surface 22. A ridge 122 extends around surface 121 and, in combination with ridge 112, is responsible for forming peripheral bond 33. In addition, a plurality of protrusions 123 extend from surface 121 and join with protrusions 113 to form interior bonds 34. Accordingly, the area of lower mold portion 120 located within the area bounded by ridge 122 forms lower surface 22. An extension of ridge 122 extends outward from surface 121 and forms an L-shaped channel 124. Channel 124 joins with channel 114 to form the conduit through which the fluid may be injected into sole component 20. Another feature of lower mold portion 120 is a plurality of slot vents 125 distributed throughout surface 121. Vents 125 provide outlets for air as a thermoplastic sheet of polymer material is drawn into the contours of lower mold portion 120 during the formation of sole component 20.

The manner in which mold 100 is utilized to form sole component 20 from reinforcing structure 40 and barrier layers 31 and 32 will now be discussed. An injection-molding process, for example, may be utilized to form reinforcing structure 40 from the materials discussed above. Reinforcing structure 40 is then cleansed with a detergent or alcohol, for example, in order to remove surface impurities, such as a mold release agent or fingerprints. The surface of reinforcing structure 40 may also be plasma treated to enhance bonding with bladder 30.

Following formation and cleansing, reinforcing structure 40 is placed between mold portions 110 and 120 and then positioned within upper mold portion 110, as depicted in FIGS. 14A and 14B, respectively. As discussed in the above material, upper mold portion 110 forms the portions of sole component 20 corresponding with upper surface 21 and side surfaces 23 and 24. In the embodiment of sole component 20 discussed above, reinforcing structure 40 is generally bonded to upper surface 21 and side surfaces 23 and 24. Accordingly, positioning reinforcing structure 40 within upper mold portion 110, as depicted in FIG. 14B, properly positions reinforcing structure 40 with respect to mold 100 for the process of forming sole component 20. A variety of techniques may be utilized to secure reinforcing structure 40 within upper mold portion 110, including a vacuum system, various seals, or non-permanent adhesive elements, for example. In addition, reinforcing structure 40 may include various tabs that define apertures, and upper mold portion 110 may include protrusion that engage the apertures to secure reinforcing structure 40 within upper mold portion 110.

A plurality of conduits may extend through mold 100 in order to channel a heated liquid, such as water, through mold 100. The heated liquid raises the overall temperature of mold 100 to approximately 180 degrees Fahrenheit. As noted above, reinforcing structure 40 is positioned within mold 100, and reinforcing structure 40 conducts the heat from mold 100,

14

thereby raising the temperature of reinforcing structure 40 to approximately 180 degrees Fahrenheit. In some embodiments of the invention, reinforcing structure 40 may be heated prior to placement within mold 100 in order to decrease manufacturing times.

Following placement of reinforcing structure 40 within upper mold portion 110, a pair of thermoplastic polymer sheets that form barrier layers 31 and 32 are heated and then positioned between mold portions 110 and 120, as depicted in FIG. 14C. The temperature to which barrier layers 31 and 32 are heated depends upon the specific material used. As noted above, barrier layers 31 and 32 may be formed from a variety of materials, including alternating layers of thermoplastic polyurethane and ethylene-vinyl alcohol copolymer, which has a melting temperature between 350 and 360 degrees Fahrenheit. The temperature to which the surfaces of barrier layers 31 and 32 may be heated is between 400 and 450 degrees Fahrenheit, which generally melts the surface of barrier layers 31 and 32 without melting the interior.

The thickness of upper barrier layer 31 prior to molding may be greater than the thickness of lower barrier layer 32. Although barrier layers 31 and 32 may exhibit different thicknesses prior to molding, each of barrier layers 31 and 32 may have a substantially uniform thickness prior to molding. A suitable thickness range for upper barrier layer 31 prior to molding is 0.045 to 0.090 inches, with one preferred thickness being 0.075 inches, and a suitable thickness range for lower barrier layer 32 prior to molding is 0.045 to 0.065 inches, with one preferred thickness being 0.055 inches. Whereas lower barrier layer 32 only forms lower surface 22, upper barrier layer 31 forms both upper surface 21 and side surfaces 23 and 24. The rationale for the difference in thickness is that upper barrier layer 31 may stretch to a greater degree in order to form both upper surface 21 and side surfaces 23 and 24. Accordingly, differences between the original, pre-stretched thicknesses of barrier layers 31 and 32 compensate for thinning in upper barrier layer 31 that may occur when upper barrier layer 31 is stretched or otherwise distorted during the formation of upper surface 21 and side surfaces 23 and 24.

Once barrier layers 31 and 32 are positioned, mold portions 110 and 120 are then located such that ridge 112 aligns with ridge 122 and the various protrusions 113 are aligned with protrusions 123. In this position, the areas of mold portions 110 and 120 that form corresponding portions of sole component 20 are positioned on opposite sides of barrier layers 31 and 32 and are also aligned. Mold portions 110 and 120 then translate toward each other such that mold 100 contacts and compresses barrier layers 31 and 32, as depicted in FIG. 14D.

As mold 100 contacts and compresses portions of barrier layers 31 and 32, a fluid, such as air, having a positive pressure in comparison with ambient air may be injected between barrier layers 31 and 32 to induce barrier layers 31 and 32 to respectively contact and conform to the contours of mold portions 110 and 120. A variety of methods may be employed to pressurize the area between barrier layers 31 and 32. For example, the fluid may be directed through the conduit formed by channels 114 and 124. That is, a needle may be placed between barrier layers 31 and 32 and between channels 114 and 124 to deliver a fluid that travels down the conduit and into the area forming sole component 20. Air may also be removed from the area between barrier layers 31 and 32 and mold portions 110 and 120 through vents 115 and 125, thereby drawing barrier layers 31 and 32 onto the surfaces of mold portions 110 and 120. That is, at least a partial vacuum may be formed between the barrier layers 31 and 32 and the surfaces of mold portions 110 and 120. In addition, drawing

US 7,401,420 B2

15

barrier layers **31** and **32** onto the surfaces of mold portions **110** and **120** also draws barrier layers **31** and **32** into contact with reinforcing structure **40**. Accordingly, barrier layers **31** and **32** contact and are bonded to reinforcing structure **40** during this portion of the manufacturing process.

As the area between barrier layers **31** and **32** is pressurized and air is removed from the area between barrier layers **31** and **32** and from between mold portions **110** and **120**, barrier layers **31** and **32** conform to the shape of mold **100** and are bonded together. More specifically, barrier layers **31** and **32** stretch, bend, or otherwise conform to extend along the surfaces of cavity **111** and surface **121** and form the general shape of bladder **30**. Ridge **112** and ridge **122** also compress a linear area of barrier layers **31** and **32** to form peripheral bond **33**. In addition, barrier layers **31** and **32** conform to the shapes of protrusions **113** and **123** and are bonded together by being compressed between protrusions **113** and **123**, thereby forming interior bonds **34**.

Although barrier layers **31** and **32** conform to extend along the surfaces of cavity **111** and surface **121**, upper barrier layer **31** generally does not contact the portions of cavity **111** that are covered by reinforcing structure **40**. Rather, upper barrier layer **31** contacts and is compressed against the inward-facing surface of reinforcing structure **40**, thereby bonding upper barrier layer **31** to reinforcing structure **40**. Referring to FIG. 9F, the outward-facing surface of connecting portion **43** is generally flush with lateral side surface **23**, and lateral side surface **23** forms a recess that receives connecting portion **43**. That is, lateral side surface **23** curves into bladder **20** so as to form a depression in which connecting portion **43** is positioned. This configuration results from the manner in which reinforcing structure **40** is placed within upper mold portion **110** and upper barrier layer **31** is compressed against the inward-facing surface of reinforcing structure **40** and bonded to reinforcing structure **40**.

The various outward-facing surfaces of reinforcing structure **40** are generally flush with surfaces **21-24** of bladder **30**. As air pressurizes the area between barrier layers **31** and **32** and air is drawn out of mold **100** through vents **115** and **125**, both upper barrier layer **31** and reinforcing structure **40** are compressed against the surface of cavity **111**. Upper barrier layer **31** contacts the inward-facing surface of reinforcing structure **40**, conforms to the shape of reinforcing structure **40**, extends around reinforcing structure **40**, and contacts the surface of cavity **111**. In this manner, the surfaces of reinforcing structure **40** are formed to be generally flush with surfaces **21-24** of bladder **30**.

As barrier layers **31** and **32** conform to the shape of mold **100** and are bonded together, upper barrier layer **31** bends at the location of upper portion **41** to form side surfaces **23** and **24**. Accordingly, upper barrier layer **31** extends in a generally horizontal direction to form upper surface **21**, and upper barrier layer **31** bends at the location of upper portion **41** to extend in a generally vertical direction and form side surfaces **23** and **24**. Accordingly, upper barrier layer **31** bends during the process of molding bladder **30** in order to form upper surface **21** and side surfaces **23** and **24**.

The edges of reinforcing structure **40** exhibit a beveled configuration, as depicted in FIG. 9F, in order to facilitate the flush nature of the interface between reinforcing structure **40** and bladder **30**. In general, if reinforcing structure **40** were formed to have a rectangular cross-section without beveling, for example, upper barrier layer **31** may be required to stretch to a greater degree, thereby causing undue thinning of upper barrier layer **31** in areas adjacent to reinforcing structure **40**. In addition, a lack of beveling may also cause a gap or space

16

to form between upper barrier layer **31** and reinforcing structure **40**. Accordingly, reinforcing structure **40** is formed to exhibit beveled edges.

During formation of the bond between upper barrier layer **31** and reinforcing structure **40**, air may become trapped between upper barrier layer **31** and reinforcing structure **40**, thereby reducing the effectiveness of the bond. In order to facilitate the removal of air from between upper barrier layer **31** and reinforcing structure **40**, a plurality of vent apertures **44** may be formed through selected locations of reinforcing structure **40**, and may be formed through the area of upper portion **41** that corresponds with upper surface **21** in order to limit the visibility of vent apertures **44**. Vent apertures provide outlets for air and may correspond in position with the various vents **115** in upper mold portion **110**.

Once sole component **20** is formed within mold **100**, mold portions **110** and **120** separate such that reinforcing structure **40** and barrier layers **31** and **32** may be removed from mold **100**, as depicted in FIG. 14E. The polymer materials forming reinforcing structure **40** and barrier layers **31** and **32** are then permitted to cool, and a pressurized fluid may be injected through the conduit formed by channels **114** and **124**. The conduit is then sealed to enclose the fluid within bladder **30**. In addition, excess portions of barrier layers **31** and **32** may be trimmed or otherwise removed from sole component **20**. The excess portions may then be recycled or reutilized to form additional thermoplastic sheets.

Connecting portions **43** are placed in tension by the pressurized fluid and operate to restrict the degree of outwardly-directed swelling (i.e., distension) in side surfaces **23** and **24**. Prior to pressurization, reinforcing structure **40** and bladder **30** are generally in a non-tensioned state. The pressurized fluid, however, exerts an outward force upon bladder **30**, thereby placing barrier layers **31** and **32** in tension. In the absence of reinforcing structure **40**, the degree of outwardly-directed swelling of barrier layers **31** and **32** may induce a rounded or otherwise bulging configuration in side surfaces **23** and **24**. Reinforcing member **40**, and particularly connecting portions **43**, restrain the outwardly-directed swelling due to the outward force of the pressurized fluid. Accordingly, tension is induced in connecting portions **43** through the pressurization of bladder **30**.

The distribution and configurations of the various interior bonds **34**, as discussed above, has an effect upon the compressibility of sole component **20**. Modifications relating to the distribution and configurations of interior bonds **34**, which are determined by the positions of protrusions **113** and **123** may be utilized to control various foot motions, such as pronation. Accordingly, foot motions may be controlled through modifications of mold portions **110** and **120**. Footwear **10** may also be configured for use during different activities, such as running, basketball, and football, through modifications in the overall thickness of sole component **20**, the distribution and configurations of the various interior bonds **34**, and the configuration of reinforcing structure **40**. Whereas a greater overall thickness of sole component **20** is suitable for running activities in order to provide greater cushioning, for example, a lesser overall thickness may be more appropriate for basketball and football in order to enhance stability. Controlling pronation may also be an issue with running activities, and protrusions **113** and **123** may be distributed and configured to control pronation when footwear **10** is intended for running. In contrast, the degree to which pronation is controlled through the distribution and configuration of protrusion **113** and **123** may be lessened when footwear **10** is intended for basketball or football.

US 7,401,420 B2

17

Accordingly, variations in the dimensions and configuration of sole component 20 may be utilized to tailor footwear 10 to specific athletic activities.

Interior bonds 34 may also be configured to affect other properties of sole component 20, such as stability. In some embodiments of the invention, selected interior bonds 34 may have an elongated configuration. Referring to the figures, an elongated interior bond 34 is positioned at the interface of midfoot region 16 and heel region 17 and extends in a medial-lateral direction. Another elongated interior bond 34 is positioned in heel region 17. Additional elongated interior bonds 34 are positioned in forefoot region 15 and may be oriented longitudinally or in the medial-lateral direction. In forward portions of forefoot region 15, for example, the elongate interior bonds 34 extend longitudinally. In comparison with round, triangular, or otherwise non-elongated interior bonds 34, the elongated interior bond 34 may exhibit increased resistance to shear forces, thereby enhancing the medial to lateral stability of sole component 20. Accordingly, the formation of elongated interior bonds 34 may be one manner of enhancing the overall stability of footwear 10.

The degree of elongation in the various interior bonds 34 also has an effect upon the compressibility of sole component 20 in the area of interior bonds 34. In general, circular interior bonds 34 exhibit greater compressibility than elongate interior bonds 34. With respect to forefoot region 15, many of the interior bonds 34 positioned between flexion indentations 35 exhibit a circular configuration in order to enhance the compressibility of this area. In forward portions of forefoot region 15, however, many of the interior bonds 34 exhibit an elongate configuration that decreases the compressibility of this area.

Various characteristics relating to the configuration of interior bonds 34 affects the overall configuration of sole component 20. In general, the spacing of interior bonds 34 in the medial to lateral direction is approximately 0.86 inches, but may be in a range of 0.5 to 0.6 inches in forward portions of forefoot region 15. The spacing of interior bonds 34 in the longitudinal direction is approximately 0.98 inches through heel region 17 and portions of midfoot region 16, but may be in a range of 0.4 to 0.9 inches in forefoot region 17. The radius formed in the transitions between surfaces 21 and 22 and the material extending inward to form interior bonds 34 has an effect upon the compressibility of interior bonds 34 and is generally selected to be in a range of 0.125 and 0.150 inches. In forward portions of forefoot region 15, however, the radius may be 0.1 inches.

Following the formation of sole component 20, upper 11 may be secured to upper surface 21 and outsole 14 may be secured to lower surface 22, thereby substantially completing the manufacture of footwear 10. The surface characteristics of sole component 20 may be adjusted to promote bonding between sole component 20 and other components of footwear 10. In general, the strength of an adhesive bond between lower surface 22 and outsole 14, for example, may be strengthened by forming lower surface 22 to have a relatively rough texture. Whereas an adhesive may not effectively adhere to an entirely smooth surface, the texture of a rough surface provides enhanced adhesive bonding. Although imparting a relatively rough texture to surfaces 21 and 22 may enhance bonding, a detriment to the relatively rough texture is decreased visibility through the polymer material forming bladder 30. Accordingly, a relatively smooth texture may be imparted to side surfaces 23 and 24 to enhance the visibility of those portions of sole component 20 that are visible when incorporated into footwear 10. The surface characteristics of sole component 20 are generally determined by the surface

18

characteristics of mold 100. The portions of cavity 111 and surface 121 that form upper surface 21 and lower surface 22 may, therefore, be less smooth than portions of cavity 111 that form side surfaces 23 and 24. Texturing surfaces of sole component 20 may also enhance bonding between bladder 30 and reinforcing structure 40. In some embodiments of the invention, the inward-facing surface of reinforcing structure 40 and the portions of upper barrier layer 31 that contact reinforcing structure 40 may be textured prior to bonding.

The process of bonding outsole 14 to lower surface 22 may be performed following the formation of sole component 20, as discussed above. Alternately, one or more traction elements may be located within mold 100 in order to form a bond between the traction elements and lower surface 22 during the thermoforming process. That is, the traction elements may be bonded to bladder 30 through a process that is similar to the process of bonding reinforcing structure 40 to bladder 30. The traction elements may be one or more elements of rubber material, for example, that are similar in configuration to a conventional outsole. The traction elements may also be additional elements of thermoplastic material that reinforce those areas of sole component 20 that contact the ground. Accordingly, the traction elements may have a variety of configurations within the scope of the present invention.

Upper portion 41 of reinforcing structure 40 extends along both the medial and lateral sides of sole component 40 and provides a defined lasting line for securing upper 11 to sole component 20, as depicted in FIG. 9G. One issue with some sole structures is that the precise extent to which the upper should be secured to the sole structure is not evident from the configuration of the sole structure. Referring to the cross-sections of FIGS. 9A-9E and 9G, reinforcing structure 40 forms a ridge 45 on both the medial and lateral sides of sole component 20. Ridge 45 is an identifiable line that defines a lasting surface, thereby defining the portions of sole component 20 to which upper 11 should be secured.

More particularly, upper 11 should be secured to the pasting surface, which is the portions of upper surface 21 that are positioned inward of ridge 45. Accordingly, an adhesive, for example, may be placed between the portions of ridge 45 that are located on the medial and lateral sides in order to properly secure upper 11 to the lasting surface of sole component 20.

The manner in which mold 100 is structured affects the resulting properties of sole component 20. For example, the configurations of mold portions 110 and 120 have an effect upon the degree of stretch that may occur in barrier layers 31 and 32. As discussed above, the thicknesses of barrier layers 31 and 32 may be selected to account for stretching during the molding process. In addition, however, mold portions 110 and 120 may be configured with draft angles that limit the degree of stretching in barrier layers 31 and 32, thereby controlling the resulting thickness of barrier layers 31 and 32. For example, the draft angles of the various protrusions 113 and 123 may range from 5 to 8 degrees and may extend upward to 13 degrees in heel region 17.

The configurations of mold portions 110 and 120 also affect the placement of peripheral bond 33. One advantage of placing peripheral bond 33 at the interface of lower surface 22 and side surfaces 23 and 24 is that unobstructed visibility is retained through side surfaces 23 and 24. This configuration requires that upper barrier layer 31 stretch to a greater degree than lower barrier layer 32 in order to also form side surfaces 23 and 24. In further embodiments of the invention, however, peripheral bond 33 may be positioned at a midpoint of side surface 23 and 24, or peripheral bond 33 may be positioned at the interface of upper surface 21 and side surfaces 23 and 24.

US 7,401,420 B2

19

Accordingly, the elevation of peripheral bond 33 may be selected to limit or otherwise control the degree of stretch in barrier layers 31 and 32.

The relative elevations of interior bonds 34 also affect the degree of stretching that occurs in barrier layers 31 and 32. If, for example, interior bonds 34 are located closer to lower surface 22 than upper surface 21, then upper barrier layer 31 must stretch downward to form the indentations associated with interior bonds 34. Similarly, locating interior bonds 34 closer to upper surface 21 causes lower barrier layer 32 to stretch upward to form the indentations associated with interior bonds 34. When determining the configuration of mold 100, the degree of stretch in barrier layers 31 and 32 may be calculated, and the relative heights of protrusions 113 and 123 may be selected to either increase or decrease the degree of stretch that occurs in areas of barrier layers 31 and 32. Accordingly, the various interior bonds may each be formed at different elevations in order to control stretch in barrier layers 31 and 32.

The relative heights of the various interior bonds 34 also affects the compressibility of sole component 20. In general, the thicknesses of barrier layers 31 and 32 is proportional to the stiffness of barrier layers 31 and 32. By forming interior bonds 34 adjacent to lower surface 22, upper barrier layer 31 is drawn downward and stretched. The stretching lessens the thickness of upper barrier layer 31 and decreases the stiffness of upper barrier layer 31, thereby increasing compressibility. By forming interior bonds 34 adjacent to upper surface 21, however, upper barrier layer 31 is stretched to a lesser degree, thereby increasing the thickness of upper barrier layer 31 and decreasing compressibility.

As barrier layers 31 and 32 stretch during the thermoforming process, the thickness of barrier layers 31 and 32 decreases. The desired resulting thickness of barrier layers 31 and 32 generally depends upon the specific use and configuration of footwear 10. Selecting the position of peripheral bond 33, the locations of interior bonds 34, and the initial thicknesses of barrier layers 31 and 32 provides control over the degree of stretch in barrier layers 31 and 32. Accordingly, the position of peripheral bond 33, the locations of interior bonds 34, and the initial thicknesses of barrier layers 31 and 32 may be selected in order to optimize the overall thickness of bladder 30 in each area of sole component 20.

Controlling the degree of stretch in barrier layers 31 and 32 may also be utilized to provide reinforcement to portions of bladder 30. In general, areas of bladder 30 that have a greater thickness will be more durable than areas with a lesser thickness. The differences in the modulus of elasticity between the material forming bladder 30 and the material forming reinforcing structure 40 may cause wear at the interfaces between bladder 30 and reinforcing structure 40. Accordingly, the degree of stretch in barrier layers 31 and 32 may be controlled to increase the thickness of bladder 30 in areas adjacent to reinforcing structure 40. As discussed above, the degree of stretch in barrier layers 31 and 32 may be controlled through a variety of mechanisms, including the configuration of mold 100, the relative thicknesses of barrier layers 31 and 32, and the positions for forming interior bonds 34, for example.

The degree of outwardly-directed swelling (i.e., distension) of barrier layers 31 and 32 due to the outward force of the pressurized fluid is restricted by interior bonds 34. Despite the presence of interior bonds 34, the portions of barrier layers 31 and 32 forming upper surface 21 and lower surface 22 may bow outward upon pressurization with the fluid sealed within bladder 30. The outward bowing effectively bends areas of barrier layers 31 and 32 and may induce additional stresses in the thermoplastic polymer material forming bladder 30.

20

One manner of reducing the additional stresses in the thermoplastic polymer material forming bladder 30 is to mold or otherwise form barrier layers 31 and 32 to include curved surfaces corresponding with the distension that would occur as a result of pressurization.

Although thermoforming is a suitable manner of forming sole component 20, a blow-molding process may also be utilized. In general, a suitable blow-molding process involves positioning reinforcing structure 40 within at least one of two mold portions and then positioning a parison between the mold portions, such as mold portions 110 and 120. The parison is a generally hollow and tubular structure of molten polymer material. In forming the parison, the molten polymer material is extruded from a die. The wall thickness of the parison may be substantially constant, or may vary around the perimeter of the parison. Accordingly, a cross-sectional view of the parison may exhibit areas of differing wall thickness. Suitable materials for the parison include the materials discussed above with respect to bladder 30. Following placement of the parison between the mold portions, the mold portions close upon the parison and pressurized air within the parison induces the liquefied elastomeric material to contact the surfaces of the mold. In addition, closing of the mold portions and the introduction of pressurized air induces the liquefied elastomeric material to contact the surfaces of reinforcing structure 40. Air may also be evacuated from the area between the parison and the mold to further facilitate molding and bonding. Accordingly, sole component 20 may also be formed through a blow molding process wherein reinforcing structure 40 is placed within the mold prior to the introduction of the molten polymer material.

A variety of other manufacturing techniques may also be utilized to form sole component 20, in addition to thermoforming and blow-molding. For example, bladder 30 may be formed separate from reinforcing structure 40, and both components may be subsequently bonded together. A dual-injection technique may also be utilized to simultaneously form bladder 30 and reinforcing structure 40 from separate materials. In some embodiments, a first element corresponding with upper surface 21 and side surfaces 23 and 24 may be formed, a second element corresponding with lower surface 22 may be joined thereto, and a third element corresponding with reinforcing structure 40 may then be secured to the exterior. Accordingly, structures having the general shape and features of sole component 20 may be formed from a variety of processes.

Additional Sole Component Configurations

The specific configuration of sole component 20 disclosed above is intended to provide an example of a sole component within the scope of the present invention. Various alternate configurations, however, may also be utilized. Referring to FIGS. 15 and 16, sole component 20 is depicted as having a plurality of bridges 46 that extend laterally across upper surface 21. More particularly, four bridges 46 extend between medial and lateral sides of upper portion 41 and enhance the stability of sole component 20. As depicted in the figures, bridges 46 are relatively narrow structures that are formed of unitary (i.e., one piece) construction with reinforcing structure 40 and are, therefore, secured to bladder 30. As with other portions of reinforcing structure 40, bridges 46 may be recessed within indentations in bladder 30 and may be bonded to bladder 30 during the thermoforming process. Although bridges 46 are depicted as being relatively narrow, the width of bridges 46 may be increased significantly depending upon the desired properties of sole component 20, and bridges 46 may form a plate that extends over heel region

US 7,401,420 B2

21

17. Furthermore, bridges 46 may extend over lower surface 22 or both of surfaces 21 and 22, and bridges 46 may extend through midfoot region 16 or heel region 17. Accordingly, the specific configuration of bridges 46 may vary significantly within the scope of the present invention.

In addition to bridges 46, sole component 20 may also include a plurality of extensions 47, as depicted in FIGS. 17 and 18. Extensions 47 are portions of reinforcing structure 40 that extend upward from sole component 20. Extensions 47 may be secured to an exterior of upper 11 or may extend between the material elements forming upper 11 in order to further secure sole component 20 to upper 11. One purpose of extensions 47 may be to extend around the foot in heel region 17, for example, to provide additional support for the foot. Accordingly, extensions 47 may serve the purpose of a conventional heel counter or other stabilizing structure. Although extensions 47 may exhibit the elongated structure depicted in the figures, a similarly-located cup-like structure 48 that is analogous to structure of the conventional heel counter may be formed as a part of reinforcing structure 40, as depicted in FIG. 19. In yet another embodiment, as depicted in FIG. 20, extensions 47 may be replaced by a plurality of lacing members 49 that are positioned to extend over the instep portion of upper 11 and form apertures for receiving the lace. Lacing members 49 may be utilized, therefore, as part of the lacing system that modifies the dimensions of the interior void, thereby securing the foot within the interior void and facilitating entry and removal of the foot from the interior void.

Bladder 30, as disclosed in the above material, forms a single, sealed chamber for enclosing the pressurized fluid. Referring to FIG. 21, bladder 30 is depicted as having a first chamber 36 and a second chamber 37 that are separated by a bond 38. First chamber 36 extends through each of regions 15-17, whereas second chamber 37 is limited to heel region 17. The pressure of the fluid within second chamber 37 may be less than the pressure of the fluid within first chamber 36 such that different areas of bladder 30 exhibit differing cushioning and compressibility properties. In further embodiments, bladder 30 may incorporate two or more separate sealed chambers positioned in other portions of bladder 30. Accordingly, the configurations of the separate sealed chambers, as well as the pressures of the fluid within the chambers may vary significantly within the scope of the present invention.

The sole structures of conventional articles of athletic footwear generally incorporate a polymer foam material, such as polyurethane or ethylvinylacetate. One drawback to polymer foam relates to the concept of compression set. As an individual utilizes an article of footwear, the sole structure is repetitively compressed. Polymer foam materials generally incorporate various gas-filled cells that may collapse or otherwise deteriorate following repetitive compressions, thereby modifying the cushioning or stability properties of the sole structure. In contrast with the conventional sole structures, sole structure 12, as described above, does not incorporate a polymer foam material. In some embodiments, as described below, a polymer foam material 18 may be utilized in combination with sole component 20.

In the various embodiments of sole component 20 discussed above, sole component 20 extends through each of regions 15-17 and, therefore, extends under a substantial portion of the longitudinal length of the foot. Referring to FIGS. 22 and 23, sole component 20 extends only through heel region 17, and polymer foam material 18 forms midsole 13 in forefoot region 15 and midfoot region 16. Sole component 20 may, therefore, extend through only a portion of the longitudinal length of footwear 10. In further embodiments, sole

22

component 20 may also be limited to a single side of sole structure 12. For example, the lateral side of sole structure 12 may incorporate sole component 20, whereas the medial side incorporates foam material 18. In yet further embodiments, a portion of bladder 30 may be replaced by foam material 18 such that reinforcing structure 40 extends around both bladder 30 and foam material 18.

Sole component 20 may be directly bonded to upper 11, as depicted in FIG. 1. As an alternative, polymer foam material 18 may extend between sole component 20 and upper 11, as depicted in FIG. 24. Accordingly, an upper surface of foam material 18 may be bonded to upper 11, and sole component 20 may be bonded to a lower surface of foam material 18. Foam material 18 is depicted as having approximately one-half the height of sole component 20, but the relative thicknesses of foam material 18 and sole component 20 may vary significantly.

The materials selected for bladder 30 and reinforcing structure 40 may exhibit different mechanical properties, such as the modulus of elasticity. In addition to mechanical properties, however, the materials selected for bladder 30 and reinforcing structure 40 may also exhibit different visual properties. For example, bladder 30 may be formed of a generally clear material, whereas reinforcing structure 40 may be formed of a generally translucent or opaque material. In addition, the colors of bladder 30 and reinforcing structure 40 may vary. Accordingly, examples of visual properties that may vary include the clarity and/or colors of the materials forming sole component 20.

A sole component 20' is depicted in FIG. 25 as incorporating a bladder 30' and a reinforcing structure 40' bonded to the exterior of bladder 30'. As with sole component 20, reinforcing structure 40' forms a reinforcing cage that is bonded or otherwise secured to an exterior of bladder 30'. In general, reinforcing structure 40' generally extends around portions of the periphery of bladder 30', and portions of reinforcing structure 40' extend along side surfaces of bladder 30'. Reinforcing structure 40' extends, therefore, between upper and lower surfaces of bladder 30'. In addition, the material forming reinforcing structure 40' may exhibit a greater modulus of elasticity than the material forming bladder 30'. Accordingly, the configuration and material properties of reinforcing structure 40' may impart reinforcement to bladder 30'.

When incorporated into an article of footwear, sole component 20' may be encapsulated within a polymer foam material, such as polyurethane or ethylvinylacetate. Accordingly, sole component 20' may replace a conventional fluid-filled bladder within a conventional sole structure of an article of footwear. Portions of sole component 20' may be exposed through apertures in the foam material so as to be visible from an exterior of the footwear, or sole component 20' may be entirely encapsulated by the foam material. Sole component 20' may also have more than one chamber with fluids of differing pressure.

CONCLUSION

The preceding discussion disclosed various embodiments of a sole component and a method of manufacturing the sole component. In general, the sole component includes a fluid-filled bladder and a reinforcing structure extending around the bladder. The reinforcing structure is bonded to the exterior of the bladder, and may be recessed into the bladder. In some embodiments, the reinforcing structure extends along the side surfaces of the bladder and between upper and lower surfaces of bladder. In manufacturing the sole component, the reinforcing structure may be located within a mold, and the poly-

US 7,401,420 B2

23

mer material forming the bladder may be bonded to the reinforcing structure during the molding process.

The present invention is disclosed above and in the accompanying drawings with reference to a variety of embodiments. The purpose served by the disclosure, however, is to provide an example of the various features and concepts related to the invention, not to limit the scope of the invention. One skilled in the relevant art will recognize that numerous variations and modifications may be made to the embodiments described above without departing from the scope of the present invention, as defined by the appended claims.

That which is claimed is:

1. An article of footwear having an upper and a sole structure secured to the upper, the sole structure comprising:

a bladder that defines a first surface, an opposite second surface, and a sidewall, the bladder enclosing a fluid that exerts an outward force upon the first surface, the second surface, and the sidewall; and

a reinforcing structure extending around at least a portion of the bladder, the reinforcing structure having a first portion that is at least partially recessed into the sidewall and bonded to the sidewall, the first portion being at least partially recessed into the first surface and bonded to a periphery of the first surface to expose a central area of the first surface,

wherein the first surface and the first portion of the reinforcing structure define a lasting surface, and the upper is secured to the lasting surface.

2. The article of footwear recited in claim 1, wherein the reinforcing structure has a plurality of connecting portions extending between the first portion and a second portion of the reinforcing member, the connecting portions extending along the sidewall.

3. The article of footwear recited in claim 2, wherein the connecting portions are at least partially recessed into the sidewall and bonded to the sidewall.

4. The article of footwear recited in claim 3, wherein the connecting portions are placed in tension by the outward force upon the barrier material.

5. The article of footwear recited in claim 4, wherein at least one of the connecting portions is inclined.

6. The article of footwear recited in claim 2, wherein a space between two adjacent connecting portions is positioned in a rear-lateral region of the sole structure.

7. The article of footwear recited in claim 1, wherein a plurality of interior bonds join the first surface with the second surface, the interior bonds being spaced inward from the sidewall to restrain distension of the first surface and the second surface.

8. The article of footwear recited in claim 1, wherein a material forming the reinforcing structure is has a greater modulus of elasticity than a material forming the bladder.

24

9. The article of footwear recited in claim 1, wherein the bladder and reinforcing structure are secured directly to the upper.

10. The article of footwear recited in claim 1, wherein at least one flexion indentation is formed in the second surface, and a space that includes the fluid extends between the indentation and the first surface.

11. The article of footwear recited in claim 10, wherein at least one interior bond joins the first surface with the indentation, the at least one interior bond being spaced inward from the sidewall.

12. The article of footwear recited in claim 1, wherein the first portion of the reinforcing structure forms a ridge located on medial and lateral sides of the first surface, a portion of the lasting surface being an inclined surface of the ridge, and the lasting surface extends between portions of the ridge.

13. The article of footwear recited in claim 12, wherein the ridge extends around a heel region of the sole structure.

14. An article of footwear comprising:

a sole structure incorporating a fluid-filled bladder and a reinforcing structure secured to the bladder, the sole structure having an upper surface and an opposite lower surface, the upper surface forming a ridge that defines a first portion of a lasting surface, at least a portion of the ridge being an inclined surface formed by the reinforcing structure and located over the bladder, the bladder defining a second portion of the lasting surface; and an upper secured directly to the first portion of the lasting surface and the second portion of the lasting surface.

15. The article of footwear recited in claim 14, wherein the bladder is a single chamber that extends through substantially all of a length of the sole structure.

16. The article of footwear recited in claim 14, wherein an adhesive directly bonds the bladder and the reinforcing structure to the upper.

17. The article of footwear recited in claim 14, wherein the ridge extends along a medial side of the sole structure, along a lateral side of the sole structure, and around a heel region of the sole structure.

18. The article of footwear recited in claim 14, wherein the upper surface of the sole structure forms a depression, and the ridge extends around the depression.

19. The article of footwear recited in claim 14, wherein a material of the reinforcing has greater stiffness than a material of the bladder.

20. The article of footwear recited in claim 14, wherein the reinforcing structure is recessed into a sidewall of the bladder, the sidewall extending between the upper surface and the lower surface.

* * * * *